
# Computers& Electronics

**AUGUST 1983** 

#### formerly Popular Electronics

\$1.50


Printers for Small Computers
Radio Shack's New Micro Color Computer
Testing the Microbuffer II Printer Interface
Compact Disc Digital Audio Systems

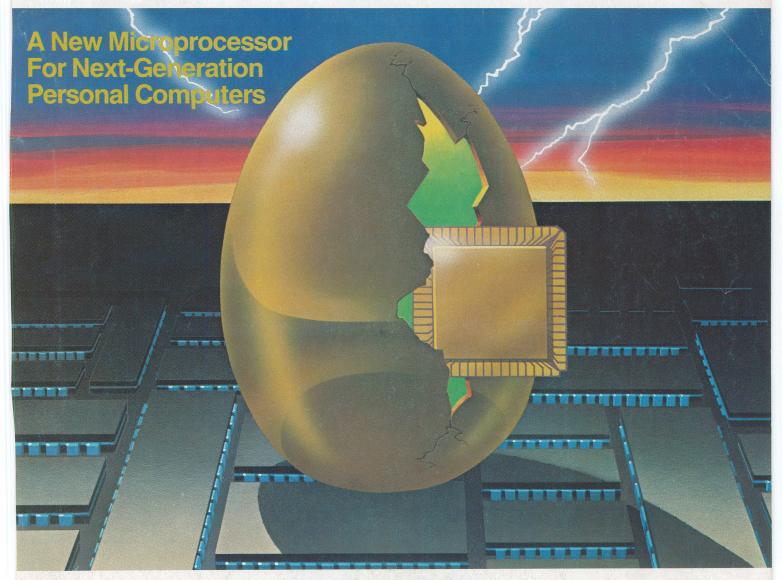



Also In This Issue:

The Latest Flat-Panel Displays
First Look at Magnavox's CD Record Player

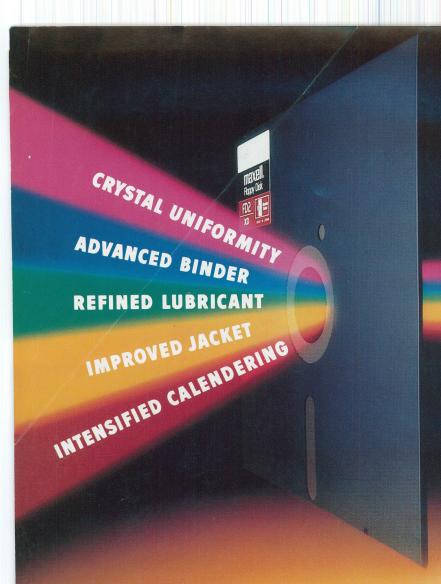

## THE GOLD STANDARD

# You can wait for industry standards to mandate improved performance. Or you can have it now on Maxell. The Gold Standard.

The refinements of The Gold Standard, from oxide particles to lubricant to jacket, are uniquely Maxell. And therefore, so are the benefits.

Our unique, uniform crystals assure dense oxide packing. So you begin with an original signal of extraordinary fidelity. A signal we safeguard in ways that leave industry standards in our wake.

An advanced binder bonds oxides to the base material preventing time and money-wasting dropouts.
Calendering then smooths the surface for a read/write signal that stays

clear and accurate. And lubricants reduce friction between head and disk for a longer media

and head life. To house it, we then constructed a new jacket heat-resistant to 140° F to withstand drive heat without warp or wear. And created the floppy disk that leads the industry in error-free performance and durability.

All industry standards exist to assure reliable performance. The Gold Standard expresses a higher aim: perfection.





#### The KLH Solo

Price Slashed
List Price \$199-Suggested Retail \$169
January 1983 Dealer Cost \$106
NOW \$68

It's been killing us. We bought these KLH stereos in April, but we agreed not to sell them till June. You see, the local KLH dealers still had lots of them in stock. Most were selling the Solo for \$169 (the very cheapest discount ad we've seen was \$129). And, the dealers had to have time to sell out their stock before our ads hit. So, we've been raring to go since April, while we've sat on DAK's best buy ever.

The KLH Solo was built to sell for \$169 to \$199 and to wholesale for \$106. It represents the very top end, state of the art in electronics. It's the audiophile's choice in personal stereos. But, unfortunately because of our last recession there just haven't been as many rich audiophiles around. So KLH ended up with 14,000 of these remarkable stereos.

DAK bought them all for cold hard cash. So if you're into absolutely the best sound in cassettes, complete with autoreverse, dual flywheel anti-rolling design, and if you'd like incomparable FM reception from the included FM stereo tuner pack, the KLH Solo is for you.

And don't worry. All of our KLH Solos are brand new factory sealed direct from the manufacturer.



The KLH Solo will make the sound of your cassettes and FM stereo explode with life. It gives you auto-reverse. The sound is simply breathtaking, and so is the incredible \$68 price.

It's vibrant. And, the sound seems to be alive. The KLH Solo brings thunderingly powerful realism to personal stereo. And frankly for its \$169 price tag, it had better sound great.

In a market flooded with cheap Hong Kong imports, the KLH stands out as the Audiophile's choice. And even though DAK is able to offer the KLH Solo to you for just \$68 (a \$101 saving), let's look at what has made it worth \$169.



DEALER PRICE SCHEDULE

EFFECTIVE: JANUARY 1, 1983

Nationally Advantised Price

S-200 The Solio Auto Reverse - Includes \$199.95 \$169.95 \$1

FM Tuner Pack, Headert, Carrying Case, Accessory Case, Shoulder

#### **AUTO REVERSE**

The anti-rolling transport of this deck is incredibly stable. It uses twin matched stabilization flywheels in conjunction with a specially designed motor to give you rock stable bi-directional play.

With auto reverse, your cassette need never stop. It just plays back and forth over and over again. It makes listening while you're on the run a real pleasure.

And, at home or in the office, with our optional home stereo cable you can plug this auto-reversing deck into any 'aux' jacks on your stereo system for an evening or a day of uninterrupted music.

Wait till you hear the quality of the sound from this audiophile cassette deck. And, while this deck is plugged into your stereo system, you can copy cassettes by playing them on the Solo and copying them on your home cassette deck.

**FABULOUS FM STEREO TOO** 

Here's where you can really hear the difference. The Solo provides FM reception that is incredible. We think you'll get more and cleaner FM stations than with any other personal stereo.

But don't take our word for it. Test it yourself. Start at the bottom of the dial and compare station to station with any other high end personal stereo.

Then, when you've left them in the dust, do the same test against the tuner in your own stereo system. You might

just be in for a very big surprise.

The FM tuner pack simply fits into the Solo like a cassette. And retracting pins direct-connect it with the Solo.

The FM signal goes directly into the amplifier, not through the head and it works off the deck's power. It uses the headphone cable as a super antenna.

There's no tape/tuner switch because the KLH Solo is intelligent enough to know when its tuner pack is inserted.

But, all of the above wouldn't mean anything if it weren't for the incredibly sensitive FM tuner circuit. It utilizes a sophisticated 20 pin integrated circuit to produce dramatically alive FM sound.

ALL THE BELLS AND WHISTLES

The Solo comes with a heavy duty protective leatherette case, a matching case that holds 3 cassettes, a shoulder strap and a removable wrist strap.

You can attach the case to your belt or look at this, there's a 'screw-on' living hinge belt or waist band clip too.

So many features. There's a metal/ normal equalization switch. The Solo reverses automatically plus even its reverse button is power assisted.

There are 2 LED arrows to show tape direction. And while we're on the subject of 2s, there are 2 headphone jacks and 2 volume controls.

Along with the 2 stability flywheels, there are 2 capstans. There's only one mute button. But, it cuts off the sound on 2 channels to hear the outside world.

The stereophones are the latest Samarium Cobalt mylar® diaphragm type that deliver earth shaking thunderous sound with such precise definition and detail, that music is almost three dimentional.

BUT IT'S THE SOUND

Take the KLH Solo to your local HiFi store. Compare its dramatic sound and

Circle No. 67 on Free Information Card

super stability with other top of the line stereos, then you'll really appreciate the achievement that the Solo represents.

The Solo is only 1/4" wider than a cassette box (4½" X 3½" X 1½"). It operates on only two AA batteries (not included). And,it's backed by a limited 90 day warranty by KLH.

TRY THE KLH SOLO RISK FREE

Take the Solo on walks, as you commute to work, while you work or relax.

Don't put it away when you get home or to the office. With our optional cable, you can plug into your home or office stereo system for continuous nonstop play of your favorite cassettes. Here's a stereo you can use all the time.

If you aren't 100% satisfied, simply return it to DAK in its original box within 30 days for a courteous refund.

To order your KLH Solo with FM Tuner Pack risk free with your credit card, call toll free or send your check not for the the \$169 suggested retail price or even the \$103 Jan 1983 dealer cost. Send just \$68 plus \$3 for postage and handling. Order No. 9683. CA res add 6% tax.

And there's more. We have a bonus cable that you plug into an earphone jack on the Solo and into any stereo 'aux' inputs on your home stereo. Just add \$4 (\$1 P&H) Order No. 9200.

Never buy batteries bonus. We'll include a charger and 4 nicad batteries (that's two in and two charging) so you'll always have music. It's a \$24.65 retail value, but it's yours for just \$12.99 (\$1.50 P&H) Order Number 9206.

B DAK INCORPORATED

TOLL-FREE 1-800-423-2636
If busy, after hours, on weekends or in CA
CALL TOLL-FREE . . . 1-800-228-1234
10845 Vanowen St., N. Hollywood CA 91605

# **Computers& Electronics**

**AUGUST 1983** 

**VOLUME 21, NUMBER 8** 

#### FEATURE ARTICLES

A SUPER CHIP FOR NEXT-GENERATION 30 PERSONAL COMPUTERS

Tony Zingale/A look at Intel's upcoming iAXP 188 CPU.

COMPACT DISC DIGITAL AUDIO SYSTEMS 4() David Ranada/How the new digital audio 4.7" playback record system works.

HIGH-GRADE DATA CONVERTER FOR THE 63 APPLE II Robert C. Nicklin/Part 2: Checkout, calibration and use.


PRINTERS FOR SMALL COMPUTERS Al Burawa/Guidelines to buying impact-type printers.

THE SOUL OF CP/M 80 M. Waite & R. Lafore/Part 4: The most hidden part of CP/M-the BIOS.

**LEARNING 16-BIT MICROCOMPUTER TECHNOLOGY** 93 George Meyerle/Part 6: How to use machine language programming.

TELETEXT EXPERIMENTS BY NETWORKS 95 TELETEXT EXPENIMENTS OF THE 1995 Leslie Solomon/Providing worldwide software distribution.

**ENGLISH BROADCASTS AUDIBLE** 107 IN NORTH AMERICA/Glenn Hauser

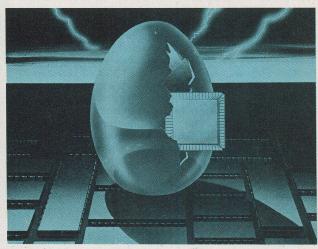

COLUMNS

12 COMPUTER VIDEO GAMES

22 LES SOLOMON ON COMPUTER HARDWARE The "Truly Portable" Sinclair/Timex.

24 COMPUTER SOURCES

THE ELECTRONICS SCIENTIST 96 Forrest M. Mims, III/Flat Panel Displays/A Tunable 60-Hz Hum Filter

#### EQUIPMENT REVIEWS

50 MAGNAVOX MODEL FD1000SL COMPACT DISC PLAYER

53 RADIO SHACK TRS-80 MODEL 4

60 RADIO SHACK MC-10 MICRO COLOR COMPUTER

78 MICROBUFFER II PRINTER INTERFACE FOR APPLE II

**DEPARTMENTS** 

EDITORIAL/Art Salsberg 4 Friendly Computers.

6 NEW PRODUCTS

104 COMPUTER MART/ELECTRONICS CLASSIFIED

120 ADVERTISERS' INDEX

COVER ART BY JAMES HEGEDUS

COPYRIGHT © 1983 BY ZIFF-DAVIS PUBLISHING COMPANY. All rights reserved. Computers & Electronics (ISSN 0032-4485) August 1983, Volume 21, Number 8. Published monthly by Ziff-Davis Publishing Co., at One Park Ave., New York, NY 10016. Richard P. Friese, President; Selwyn Taubman, Treasurer; Bertram A. Abrams, Secretary. One year subscription rate for U.S. and Possessions, \$15.97; Canada, \$20.97; all other countries, \$23.97 (cash orders only, payable in U.S. currency). Second Class Postage Paid at New York, N.Y. 10016 and at additional mailing offices. Authorized as second class mail by the Post Office Dept., Ottawa, Canada, and for payment of postage in cash. POPULAR ELECTRONICS including ELECTRONICS WORLD trademark registered. Indexed in the Reader's Guide to Periodical Literature. Ziff-Davis also publishes Boating, Car and Driver, Cycle, Flying, Popular Photography, Skiing, Stereo Review, Electronic Experimenter's Handbook, and Tape Recording & Buying Guide. POSTMASTER: Send address changes to COMPUTERS & ELECTRONICS. Circulation Dept. P.O. Box 2774, Boulder, CO 80302. Please allow at least eight weeks for change of address, enclosing, if possible, an address label from a recent issue. Permissions. Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to Elizabeth Amado, Rights and Permissions, Ziff-Davis Publishing Co., One Park Ave., New York, NY 10016.

# IF PERSONAL COMPUTERS ARE FOR EVERYBODY, HOW COME THEY'RE PRICED FOR NOBODY?

A personal computer is supposed to be a computer for persons. Not just wealthy persons. Or whiz-kid persons. Or privileged persons.

But person persons.

In other words, all the persons whom Apple, IBM, and Radio Shack seem to have forgotten about (including, most likely, you).

But that's okay. Because now you can get a high-powered home computer without taking out a second mortgage

on your home.

It's the Commodore 64. We're not talking about a low-priced computer that can barely retain a phone number. We're talking about a memory of 64K. Which means it can perform tasks most

\$1395\*

5999\* TRS-80® III 16K

ers above.)

other home computers can't. Including some of those that cost a lot more. (Take another look at the three comput-

By itself, the Commodore 64 is all the computer you'll ever need. Yet, if you do want to expand its capabilities some day, you can do so by adding a full complement of Commodore peripherals. Such as disk drives. Modems. And printers.

You can also play terrific games on the Commodore 64. Many of which

will be far more challenging than those you could ever play on a

game machine alone.

And as great as all this sounds, what's even greater-sounding

is the price. It's hundreds of dollars less than that of our nearest competitor.

So while other companies are trying to take advantage of the computer revolution, it seems to us they're really taking advantage of something else:

Their customers.

\*Manufacturers' suggested list prices as of March 20, 1983. Monitor included with TRS-80 III only. Commodore Business Machines, PO. Box 500R, Conshohocken, PA 19428; Canada–3370 Pharmacy Avenue, Agincourt, Ont., Can. M1W 2K4.



Agole is a registered trademark of Papie Computer inc.
1RS-80 is a registered trademark of Indy Corp. IBM is a registered trademark of International Business Machines Corp.

THE COMMODORE 64". UNDER \$600.
You can't buy a better computer at twice the price.
Circle No. 29 on Free Information Card.

#### **FDITORIAL**



#### Friendly Computers

ARE computers "friendly"? I suppose if I asked that question of 100 people, 99 would probably respond with a resounding "No!" But what is a friendly computer anyway? Let's dodge the question for a bit, and examine some other supposedly friendly machines.

The first one to come to mind is the television receiver. Is it truly friendly? Consider TV's purpose: to bring entertainment and information into the home. Now how much effort does it take to accomplish this purpose? Just turn on a switch—very friendly. However, think back to the time when you first bought the TV. If it had a mechanical tuner, you just plugged it in, turned it on, and selected a channel. But if it had pushbutton electronic tuning, you had to set (or fine tune) the desired sta-

tions before the TV progressed into its friendly mode.

How about an electronic typewriter? Usually it's a cinch to slide paper into the machine, turn it on, and produce hard copy. Truly a friendly machine you might say. But how about when you try to take advantage of some of its special features, such as automatic tabs and error correcting—or what about the basics such as setting margins and centering copy? Does a typewriter seem a little less friendly now? Let's also mention that both the TV and the typewriter are "dedicated" machines, meant to do one specific job.

Before we return to our original question, let's look at the computer in contrast to the other machines. Firstly, the computer is not a dedicated machine. It can handle a wide variety of tasks as we all know. Secondly, when a computer is used to accomplish a task, the user usually wants it to perform many sophisticated functions. Take word processing as an example. We are not satisfied to place a sheet of paper in a printer and use the computer's keyboard to produce hard copy. We want the computer to do all the normal tasks like setting margins, centering, etc. We also want it to check spelling, move paragraphs around, add footnotes, and maybe even suggest (thesaurus-like) possible alternate words to use. No wonder it seems unfriendly at times!

But hardware manufacturers and software authors are really striving to make the computer more friendly. In the hardware area, we are seeing products like the mouse, touch pad, light pen, and touch-sensitive video screen. In the software area, authors are using metaphors and icons, and, in general, a more graphic approach to the interface between man and machine.

Machines such as Apple's Lisa have taken a giant step in the direction of the friendly computer. Of the less-expensive machines, Epson's QX-10 and Radio Shack's Model 100 appear to be moving in the right direction with important applications packages built in. Current machines such as the IBM Personal Computer and the Commodore 64 will become more friendly with the addition of software such as VisiCorp's VisiOn, which is an easy-to-use window-oriented software system, and Commodore's Magic Desk, which uses pictorial images to convey information to the user.

Are computers friendly? The answer right now is no. Will they be more friendly in the future? Yes, definitely. Will they ever be friendly in the same sense as a TV or typewriter? Probably not. But then again, you can never hope to accomplish with a TV, typewriter, or any other dedicated and "dumb" machine the same things you can accomplish with a computer.

Art Salsberg

#### **Computers&Electronics**

formerly Popular Electronics

WILLIAM S. DAVID
Publisher

ARTHUR P. SALSBERG
Editorial Director

LESLIE SOLOMON Technical Director

JOHN R. RIGGS Managing Editor

EDWARD I. BUXBAUM
Art Director

ALEXANDER W. BURAWA Senior Editor

> JOSEPH DESPOSITO Technical Editor

> > STANLEY VEIT Technical Editor

ANDRE DUZANT
Technical Illustrator

CARMEN ROBLES
Production Editor

JEFF NEWMAN
Editorial Assistant
Contributing Editors:

Walter Buchsbaum, Len Feldman Glenn Hauser, Julian Hirsch Forrest Mims







Editorial and Executive Offices One Park Avenue New York, New York 10016 212 725-3500

Sales Offices

New York Office Tom Ballou 212 725-3578 Ken Lipka 212 725-3580

Midwestern

Suite 1400, 180 N. Michigan Ave., Chicago, IL 60601 312 346-2600 Sales: Robert Vanek

Western

J.E.M. Associates Francisco Bay Office Park 1750 Montgomery Street San Francisco, CA 94111 415-989-4643 Joe Mesics

Representation in Japan

J.S. Yagi Iwai Trading Co., Ltd. 603 Ginza Sky Heights Bldg. 18-13, Ginza 7-Chome Tokyo, Japan 104 Consumer Computers & Electronics Magazine Division

Larry Sporn President
J. Scott Briggs Vice President, Marketing
Carole Mandel Vice President, Circulation
Eileen G. Markowitz Vice President
General Manager
Peter J. Blank Creative Director

Ziff-Davis Publishing Company

Richard P. Friese
Albert S. Traina
Furman Hebb
Paul H. Chook
Phillip T. Heffernan

President, Consumer
Magazine Division
Executive Vice President
Executive Vice President
Marketing and Circulation
Senior Vice Presidents

Phillip T. Heffernan Senic Sidney Holtz Edward D. Muhlfeld Philip Sine Baird Davis George Morrissey Selwyn Taubman

Bertram A. Abrams

Vice Presidents

Treasurer

Editorial correspondence: COMPUTERS & ELECTRONICS, 1 Park Ave., New York, NY 10016. Editorial contributions must be accompanied by return postage and will be handled with reasonable care; however, publisher assumes no responsibility for return or safety of manuscripts, art work, or models submitted.

The publisher has no knowledge of any proprietary rights which will be violated by the making or using of any items disclosed in this issue.

# wabash diskettes as 1.29 each!

Now get Wabash Quality at a CE Price

For over 17 years, Wabash has been making high quality and dependable computer products. Wabash diskettes are made to provide error-free performance on your computer system because every diskette has been totally and hypercritically tested. Since you can now buy Wabash computer products directly from CE, the world's largest distributor of magnetic media, you can now get maximum savings on every order. You can even order toll-free.

**New Wabash Six Year Warranty** 

The quality of Wabash diskettes is stressed throughout the entire manufacturing process. After coating, all Wabash diskettes go through a unique burnishing process that gives each diskette a mirror-smooth appearance. Wabash then carefully applies a lubricant that is specially formulated to increase diskette life. Then, to keep out foreign particles, a unique heat seal bonds the jacket and liner together to help prevent contamination. After 100% hypercritical testing and certification, Wabash then packages each diskette, (except bulk pack) in a super strong and tear resistant Tyvek® evelope. The final Wabash product is then shrink-wrapped to insure cleanliness and reduce contamination during shipment. Wabash diskettes are so very reliable that Wabash now offers a six year warranty in case of defects in materials or workmanship on all diskettes purchased directly from Communications Electronics.

New...Wabash Diskette Duplication Services

Communications Electronics has teamed up with Wabash to provide a single-source solution for the diskette duplication requirements of software developers, OEM's and distributors. All service is in-house, to give you fast, dependable service. In most cases, delivery can be completed in five days. Whether you require 100, 1,000, or 10,000 copies per week, call CE first for a no obligation price quote. For additional information, please write us on your letterhead with your requirements.

please write us on your letterhead with yo	our requi	rements.
SAVE ON WABASH DISKETTES Product Description	Part #	CE quant. 100 price per disk (\$)
8" SSSD IBM Compatible (128 B/S, 26 Sectors)	F111	1.89
8" SSSD Shugart Compatible, 32 Hard Sector	F31 A	1.89
8" SSDD IBM Compatible (128 B/S, 26 Sectors)	F131	2.39
8" DSDD Soft Sector (Unformatted)	F14A	2.99
8" DSDD Soft Sector (256 B/S, 26 Sectors)	F144	2.99
8" DSDD Soft Sector (512 B/S, 15 Sectors)	F145	2.99
8" DSDD Soft Sector (1024 B/S, 8 Sectors)	F147	2.99
51/4" SSSD Soft Sector w/Hub Ring	M11A	1.49
51/4" Same as above, but bulk pack w/o envelope	M11AB	1.29
51/4" SSSD 10 Hard Sector w/Hub Ring	M41A	1.49
51/4" SSSD 16 Hard Sector w/Hub Ring	M51A	1.49
51/4" SSDD Soft Sector w/Hub Ring	M13A	1.79
51/4" Same as above, but bulk pack w/o envelope	M13AB	1.59
51/4" SSDD 10 Hard Sector w/Hub Ring	M43A	1.79
51/4" SSDD 16 Hard Sector w/Hub Ring	M53A	1.79
51/4" DSDD Soft Sector w/Hub Ring	M14A	2.69
51/4" Same as above, but bulk pack w/o envelope	M14AB	2.49
51/4" DSDD 10 Hard Sector w/Hub Ring	M44A	2.69
51/4" DSDD 16 Hard Sector w/Hub Ring	M54A	2.69
51/4" SSQD Soft Sector w/Hub Ring (96 TPI)	M15A	2.59
51/4" DSQD Soft Sector w/Hub Ring (96 TPI)	M16A	3.69
51/4" Tyvek Diskette Envelopes - Price per 100 Pack	TE5	12.00

SSSD = Single Sided Single Density; SSDD = Single Sided Double Density; DSDD = Double Sided Double Density; SSQD = Single Sided Quad Density; SSQD = Density Sided Quad Density; TDL = Tools per just just an inchination of the side of t

DSQD = Double Sided Quad Density; TPI = Tracks per inch.

**Quantity Discounts Available** Wabash diskettes are packed 10 disks to a carton and 10 cartons to a case. The economy bulk pack is packaged 100 disks to a case without envelopes or labels. Please order only in increments of 100 units for quantity 100 pricing. With the exception of bulk pack, we are also willing to accommodate your smaller orders. Quantities less than 100 units are available in increments of 10 units at a 20% surcharge above our 100 unit price. Quantity discounts are also available.



Order 500 or more disks at the same time and deduct 1%; 1,000 or more saves you 2%; 2,000 or more saves 3%; 5,000 or more saves 4%; 10,000 or more saves 5%; 25,000 or more saves 6%; 50,000 or more saves 7%, 100,000 or more saves 8%, 500,000 or more saves 9% and 1,000,000 or more disks earns you a 10% discount off our super low quantity 100 price. Almost all Wabash diskettes are immediately available from CE. Our efficient warehouse facilities are equipped to help us get you the quality product you need, when you need it. If you need further assistance to find the flexible disk that's right for you, call the Wabash compatibility hotline. Dial toll-free 800-323-9868 and ask for your compatibility representative. In Illinois or outside the U.S. dial 312-593-6363 between 9 AM to 4 PM Central time.

**Buy Wabash Diskettes with Confidence** 

To get the fastest delivery from CE of your Wabash computer products, we recommend you phone your order directly to our Computer Products Division and charge it to your credit card. Be sure to calculate your price using the CE prices in this ad. Written purchase orders are accepted from approved government agencies and most well rated firms at a 30% surcharge for net 30 billing. For maximum savings, your order should be prepaid. All sales are subject to availability, acceptance and verification. All sales are final. All prices are in U.S. dollars. Prices, terms and specifications are subject to change without notice. Out of stock items will be be placed on backorder automatically unless CE is instructed differently. Minimum prepaid order is \$50.00. Minimum purchase order \$200.00. All shipments are F.O.B. Ann Arbor, Michigan U.S.A. No COD's please. Non-certified and foreign checks require bank clearance.

For **shipping charges** add \$8.00 per case or partial case of 100 8-inch flexible disks or \$6.00 per case or partial case of 100 51/4-inch mini-diskettes for U.P.S. ground shipping and handling in the continental U.S.A.

Mail orders to: Communications Electronics, Box 1002, Ann Arbor, Michigan 48106 U.S.A. If you have a Visa or Master Card, you may call and place a credit card order. Order toll-free in the U.S. Dial 800-521-4414. In Canada, order toll-free by calling 800-265-4828. If you are outside the U.S. or in Michigan dial 313-994-4444. Telex anytime 810-223-2422. Order your Wabash diskettes today.

Copyright ®1983 Communications Electronics™

Ad #U12483









Order Toll-Free! 800-521-4414

In Michigan 313-994-4444

wabash error-free diskettes



**Computer Products Division** 

818 Phoenix ☐ Box 1002 ☐ Ann Arbor, Michigan 48106 U.S.A. Order TOLL-FREE 800-521-4414 or outside U.S.A. 313-994-4444

CIRCLE NO. 19 ON FREE INFORMATION CARD

#### **NEW PRODUCTS**

#### RCA ALL-PURPOSE TERMINALS

RCA's line of all-purpose terminals (APT) for multi-database timesharing and dedicated, direct computer-connected applications have either full-stroke or membrane keys and come with or without a 12" terminal. Features include menu-controlled operation; programmable "personality" to match communication requirements for each database; built-in, direct-connect 300-baud modem; tone or pulse auto-dialing of up to 26 stored phone numbers; and automatic log-on. Standard 60-key alphanumeric keyboard includes two user selectable keys and there is also a 16-key calculator pad. Full-keystroke with terminal (shown): \$598.

Circle No. 83 on Free Information Card





#### **CAR AUDIO CASSETTE RECEIVER**

The YCR-900 cassette receiver from Yamaha features 18 W/channel output into 4 ohms, both channels driven. It also has electronic synthesizer tuning, automatic reversing, and a bottom-loading tape transport with full logic control. Tuner section has automatic "seek" and manual tuning in both directions, 6

AM and 6 FM illuminated station presets, Yamaha's FM Automatic Noise Control, and adjustable muting threshold. Specs: sensitivity, 17.3 dBf; 50-dB quieting, 20.7 dBf; alternate channel selectivity, 80 dB; S/N, 65 dB; frequency response, 30-15,000 Hz. \$550.

Circle No. 84 on Free Information Card



#### BRIEFCASE COMPUTER WITH DISK DRIVE

The Pied Piper has a full ASCII keyboard, is built around the Z80A CPU, and has an integral slim-line minifloppy disk drive with 748K bytes (formatted) and accommodations for a second 748K-byte floppy drive. The STM Electronics Corp. computer has 64K RAM, 4K ROM, 2K video display buffer, and 2K ROM for character generation. A 5M- or 10M-byte hard-disk subsystem can be added. It can interface a standard CRT monitor providing a 24-line by 80-character format. An r-f modulator is also available. For hard-copy printout, there is a parallel port for Centronics/Epson-style printers. The Pied Piper operates on CP/M 2.2 and the Perfect Software package (word processing, spelling dictionary, electronic spreadsheet, and data filing/merging system) is included. Dimensions:4" × 20" × 11"; weight: 12.5 lb. \$1299.


Circle No. 85 on Free Information Card

#### NETWORK CAPABILITY IN PORTABLE COMPUTER

TeleTote I, from TeleVideo Systems Inc, is claimed to be the first portable computer with the capability of being connected to a network. An optional RS-422 port enables it to be linked to a TeleVideo network for access to shared files, printers, and electronic mail. Weighing 25 lb, it has a 9" display screen with 640 by 240 graphics resolution. Display is 24 lines by 80 characters. It has a Z80A CPU, 64K RAM, expandable to 128K, a 368.6K (formatted) 5¼" floppy-disk drive, a SuperMouse port for cursor manipulation, and two RS232 printer/modem ports. \$1499.

Circle No. 86 on Free Information Card



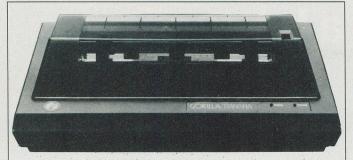

#### LOW-COST DOT-MATRIX "BANANA"

The Gorilla/"Banana" dot-matrix printer, features 50 cps print speed, dot-addressable graphics,  $5\times 7$  dot matrix, tractor paper feed, self-inking ribbon cassette, parallel or serial interface, and  $10^{\prime\prime}$  carriage. From Leading Edge Products, it can print either 10 or 5 cpi, the former providing 80 columns. Printhead pressure is adjusted with a 7-position switch. Four special character sets are included for US, UK, Germany, and Sweden. Has rotating thumbwheel advance and single-hammer construction. Weighs 10 lb. \$249.95.

Circle No. 87 on Free Information Card

#### **16K TIMEX SINCLAIR 1500**

The Timex Sinclair 1500 features 16K RAM (expandable to 32K), extended BASIC, and 40 moveable keys. Each key can perform as many as six functions including keyword entry. The 1500 is said to be compatible with all of the peripherals and software available for the TS1000. Additionally, instant-load software cartridges can be inserted into a low-cost interface that plugs into the computer. \$79.95.

Circle No. 88 on Free Information Card



#### PORTABLE COMPUTER IS IBM-PC COMPATIBLE

The Columbia VP is an 8088-based microcomputer said to provide IBM compatibility in a portable package. It features a 9" video monitor, two 5¼" half-high floppy-disk drives, IBM-standard keyboard, 128K RAM (expandable to 256K), an RS232 interface, and parallel printer interface. Video display is  $600 \times 200$  or  $320 \times 200$  pixels. Disk drives are 320K double-sided, double-density. Dimensions: 18"  $\times$  14"  $\times$  8"; weight: 32 lb. \$2995.

Circle No. 89 on Free Information Card

#### **TELEVISION WATCH**

Claiming it to be the first television watch, Seiko has introduced a digital wristwatch that also contains a 1.2" LCD TV screen and weighs less than 2 oz. Accompanying the wrist unit are a pocket-size powerpack/tuner and stereo headphones (which also contain the antenna). The set will receive all 82 vhf and uhf channels and FM stereo radio. The display has 31,920 elements. \$495.

Circle No. 90 on Free Information Card





Smith-Corona's TP-II has a dual interface for RS232 or Centronics operation; a 10/12-pitch ASCII 93-character printwheel; panel switches for form fed, line feed, and self test; interior switches for baud rate, parity, and character length, and for foreign languages; automatic underscore; programmable margins and tabs; and 256-character buffer. Print speed is 12 cps. \$895. Optional tractor feed, \$149.

Circle No. 91 on Free Information Card

### "I built this 16-bit computer and saved money. Learned a lot, too."

Save now by building the Heathkit H-100 vourself. Save later because your computer investment won't become obsolete for many years to come.

Save by building it yourself. You can save hundreds of dollars over assembled prices when you choose the new H-100 16-Bit/8-Bit Computer Kit - money you can use to buy the peripherals and software of your choice.

**DIAGNOSTICS:** 

on power-up

CP/M-85

Multiplan

SuperCalc

WordStar

MailMerge

**Data Base** 

8-bit CP/M

Most standard

Manager

Memory self-test

**Z-BASIC** Language

Microsoft BASIC

**AVAILABLE SOFTWARE:** Z-DOS (MS-DOS)

#### H-100 SERIES COMPUTER SPECIFICATIONS:

**USER MEMORY:** 128K-768K bytes

MICROPROCESSORS: 16-bit: 8088 8-bit: 8085

**DISK STORAGE: Built-in standard** 5.25" disk drive, 320K bytes/disk

KEYBOARD: Typewriter-style, 95 keys, 13 function keys. 18-key numeric pad

**GRAPHICS:** Always in graphics mode. Software 640h/225v resolution; up to eight colors are available

**COMMUNICATIONS:** Two RS-232C Serial Interface Ports and one parallel port

128K bytes standard.

Optional

The H-100 is easy to build – the step-by-step Heathkit manual shows you how. And every step of the way, you have our pledge - "We won't let you fail." Help is as close as your phone, or the nearest Heathkit Electronic Center.

And what better way to learn state-of-the-art computing techniques than to build the world's only 16-bit/8-bit computer kit? To run today's higher-speed, higher-performance 16-bit software, you need an H-100. It makes a significant difference by processing more information at faster speeds.

Dual microprocessors for power and compatibility. The H-100 handles both high-performance 16-bit software and most current Heath/Zenith 8-bit software.

Want room to grow? The H-100's standard 128K byte Random Access Memory complement can be expanded to 768K bytes – compared to a 64K standard for many desktop computers.

And the industry-standard S-100 card slots support memory expansion and additional peripheral devices. increasing future upgradability of the H-100.

High-capacity disk storage, too. The H-100's 5.25" floppy disk drive can store 320K bytes on a single disk. The computer also supports an optional second 5.25" and external 8" floppy disk drives. And an optional multimegabyte internal Winchester disk drive

will be available in the near future.

The H-100 gives me the most for my computer dollar!



Critical circuits are pre-assembled, making the H-100 easier and faster to build!

Want beautiful high-resolution graphics? You can create extensive charts, drawings, graphs and symbols to meet your needs — using the H-100's bit-mapped graphics and its 640 x 225 pixel video display.

The H-100 gives you total communications flexibility. Three interface ports let you plug in dot-matrix and letter-quality printers, as well as other peripherals.

#### Compare the H-100's exceptional capabilities with other desktop computers:

COMPUTED	Heathkit	IBM Personal	Apple
COMPUTER:	H-100	Computer	III
MICROPROCESSORS:			
16-bit:	8088	8808	
8-bit:	8085		6502
RANDOM' ACCESS MEMO	IRY:		
Minimum:	128KB	16KB	128KB
Maximum:	768KB	576KB	256KB
FLOPPY DISK STORAGE:			
Per Diskette:	320KB	320KB	140KB
Maximum Internal:	640KB	640KB	140KB
8" Floppy Support:	Standard		
EXPANSION SLOTS:	Five S-100	Five (three	Eight
	(four available)	available)	
I/O PORTS:			
Parallel:	1	Optional	
Serial:	2	Optional	1
VIDEO DISPLAY:			
Line Columns	25 x 80	25 x 80	24 x 80
Pixels Colors	640 x 225	640 x 200	560 x 192
	(8 colors)	(2 colors)	(16 colors)
		320 x 200	
		(4 colors)	
OPERATING SYSTEMS:	CP M-85	CP M-86	200 alask
UPENATING STSTEMS:	Z-DOS (MS-DOS)	PC-DOS (MS-DOS)	Apple SOS
	Z-DU3 (NI3-DU3)	UCSD P-System	
		OCCUPATION SYSTEM	

Learn by building. When you build and operate the H-100, you learn more about this sophisticated computer system and its unique 16-bit/8-bit software capabilities.

External disk storage available soon.

Information current as of 8/31/82.

Learn from outstanding documentation. One of the most important parts of any computer system is documentation — and Heathkit documentation is among the industry's best. Our instruction and operating manuals are fully detailed, in the world-famous Heathkit tradition.

Learn by doing. Many of our software programs come with a complete set-up and operating manual. More complete than most other software documentation, each manual not only tells you what the program will do – it shows you the easiest way to accomplish each task.

We back you all the way. With Heathkit computer products, technical assistance and expertise is as close as your telephone – or the nearest Heathkit Electronic Center. Complete technical assistance and service is available at over 60 locations nationwide.

Buy from a leader. When you choose a Heathkit computer, you get the backing and reliability of the world's leader in quality electronic kits for over 50 years! You can count on us for quality, service, reliability and value at kit prices that give you more computer for your dollar!

See the H-100 in action. Visit your nearby Heathkit Elec-

Always in graphics mode, you can control each of the H-100's 144,000 screen dots! (Color graphics optional)

tronic Center, which has the world's first 16-bit/8-bit computer kit, peripherals and software programs on display. See your telephone white pages for the nearest store location. Or mail the coupon today for a FREE, full-color Heathkit computer catalog.

	ot 310-084
Name	The second s
Address	
City	State
CP-218R1	Zip
(大) 在17 至7 和 17 7 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	

Heathkit Electronic Centers are units of Veritechnology Electronics Corporation. Heath Company and Veritechnology Electronics Corporation are subsidiaries of Zenith Radio Corporation. Prices, product availability and specifications are subject to change without notice.

Heathkit

Heath

Company

#### COMPUTER VIDEO GAMES

#### Hands-On Reviews of Recently Released Game Software

ONE of the more intriguing developments for what are traditionally hometype computers is the rash of "serious software" products coming out for such machines as the Atari 800 and the Commodore VIC-20. Foremost as members of this group are the several word-processing programs we've seen-some fairly venerable, others brand new.

Atari has had its own WP for quite a while; and though it is more complex than most, it comes with a tutorial tape cassette that helps make life easier for the complete neophyte. Atari also reports a new, improved WP program. We haven't seen it yet, but it's supposed to be extra-easy to learn.

One that's been out for a while and that we found especially easy and quick to learn is DataSoft's "Text Wizard." The various command functions are a breeze to assimilate, and the supplier has thoughtfully provided a quick-reference crib card—something that would be very helpful from every software supplier. Maybe they did it this way because they're primarily a game vendor and used to putting concise instructions on a card in the package.

A brand new one is the "Bank Street Writer," just landed from Broderbund Software. It comes with a tutorial on the reverse side of the diskette. To retrieve the tutorial, play the diskette upsidedown—a feat that's possible with the Atari disk drive. Unlike most other lowcost WP programs, Bank Street Writer presents the screen display the way it will appear on the printed page instead of jumbling it all together in one mishmash. This is a definite plus, and the designers are to be congratulated on their thoughtfulness and thoroughness in putting this package together.

For the VIC-20, we have two entries of import: the Quick Brown Fox and Wordcraft 20. They're both on plug-in ROM cartridges. The Q.B.F. is supercheap (about \$65), a price probably made possible by the fact that it's been around for a while and just recently surfaced in a VIC version. In its unexpanded version, the ROM cart provides about 2K of space for creating files. Adding memory expansion is a big help here. Like most such programs, it relies heavily on your willingness to save the goodies on a cassette tape at your earliest convenience. All the usual features are there: variable page parameters, rapid scroll, find and replace, etc. And it's easy to use.

The principal problem with the Q.B.F.—as with most anything you run on the VIC-20—is the fact that the computer has a nonstandard printer output and you need a special interface converter such as the one from Cardco (about \$79) that lets the computer run with any parallel printer. It is a cheap and quick way to get word processing on a low-cost computer.

Another VIC-20 entry, Wordcraft 20 from U.M.I. (another game house), costs a bit more (about \$150), but has some additional features that make up for the higher price tag. For one thing, it doesn't require that special interface to run the printer. Instead, it has specific programming addresses built in so it will drive just about any parallel printer right from the VIC's user port.

Also, the Wordcraft has a 40-column screen display converter built into its circuitry, which makes the VIC somewhat more feasible as a word processor than does its normal 23-column display. You do need a special connecting cable for most typical printer hookups, but any good computer store will make this up for you. When you compare Wordcraft with Q.B.F., neither one comes off with a particular price edge, since the Wordcraft has features built in that are otherwise available only with additional hardware when you use the Q.B.F. But the latter system has a big attraction—the low initial cost, which makes it painless to buy and add to later.

One thing about all these word processors—whether they're for the Atari or the VIC-a decent-quality monochrome monitor is important in order to read print on the screen easily. Substituting an excellent amber-andblack-screen monitor for a color-TV set made an enormous difference! Both the VIC and the Atari have a composite video output at a five-pin DIN connector, so attaching the monitor was no problem at all. All that was needed was a \$5 DIN-to-RCA adapter.

#### ARCHON

Diskette for Atari 400/800 Electronic Arts, 2755 Campus Drive, San Mateo, CA 94403, 415-571-7171. \$40.00

Graphics \*\*\*\* Gameplay \*\*\*\* Sustained Interest \*\*\*

Type: Joystick strategy/adventure

Memory Required: 32K

Once in a while, we come across a new company with some really brilliant computer game concepts. This is one of those rare cases. The emergence of Electronic Arts with its line of "thinking" computer games may show the way for a lot of successful entries in the future. We've had a peek at some of the other games to come from this company, and we think they'll be real winners.

Archon is a combination of several



types of games. It starts out looking something like a chess board, except the players are mostly fantasy-allegorical characters such as the wizard, sorceress, unicorn, phoenix, shapechanger, and others. Each playing piece, called an "icon," has particular move limits that it can make on the board; and each has its own special way of doing battle.

This is best played as a two-player game, although you may elect to play against the computer—in which case, you may not stand a chance. Each icon has a specific battle weapon, and you engage an enemy piece by trying to occupy the same square on the chessboard that the enemy is on. When you press your fire button to "engage," the screen changes, and the two of you square off on a field of battle that has many trees and shrubs to act as obstacles and shields.

Some pieces, like the knights and goblins, are sword-swingers and club wielders, so their range of effectiveness is limited. But when you play against the computer, watch out for those lowly goblins; they're fast and mean! Other icons have long-range weapons such as fireballs, lightning bolts and arrows. The phoenix has a field of fire, while the wizard and sorceress (on opposing teams) can throw fireballs. They can also cast a number of very useful spells such as teleport, heal, revive (a dead icon), summon an element (wind, water, fire, etc. to act as combatants), imprison (a troublesome opposing icon), or reverse time. Each spell can be used just once during a game, and it's important to remember what you have left and to

(Continued on page 16)



#### A flawless future is in sight with 3M diskettes.

When it comes to keeping track of precious data, predictable means reliable. Being able to count on every diskette, every time. At 3M, reliability is built into every diskette. We've been in the computer media business for over 30 years. And we've never settled in. We're constantly improving and perfecting our product line, from computer tape and data cartridges to floppy disks.


3M diskettes are made at 3M. That way, we have complete control over the entire manufacturing process. And you can have complete confidence in the reliability of every 3M diskette you buy.

Look in the Yellow Pages under Computer Supplies and Parts for the 3M distributor nearest you. In Canada, write 3M Canada, Inc., London, Ontario. If it's worth remembering, it's worth 3M diskettes.



3M hears you...



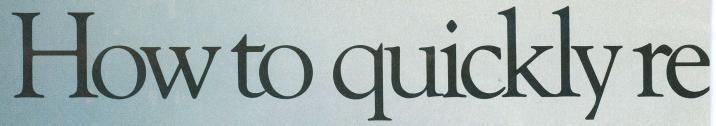

If you'd like to turn the agony of small business bookkeeping into the ecstasy of total control, you've come to the right place.

Because even if you're starting with a shoe box full of invoices or a pile of checks hiding under a pile of deposit slips, we can tell you how to centralize, organize and monitor all that information, and manipulate it in ways that will make your business a

pleasure—all with an Apple\*III Personal Computer.

#### Attain instant financial status.

An Apple III, teamed with the BPI General Accounting Package, can put every basic accounting function right at your fingertips.

Technically,

that means

General Ledger, Accounts
Payable, Accounts Receivable
and Payroll—all in one package.
Magningfully that magneyou

Meaningfully, that means you can turn numbers into answers.

With BPI, your Apple III can give you a snapshot of your company's financial condition, an up-to-the-instant

balance sheet. It can also generate instant and detailed reports



# gain your balance.

on your customers and vendors. So you know who owes whom.

how much, and how come.

And just how well your cash flow is flowing.

And where to give credit where credit is due (a customer inquiry

Periods Ending	rrent Comparative May 31, 1983 and May	
		May 31, 1982 %
Income Contract Sales Retail Sales	52,818.02 91.3 5,016.88 8.7	44,176.52 92 3,500.00 7
Total Income	57,834.98 108.8	47,676.52 100.
Cost of Sales Cost of Contract Sales Cost Of Retail Sales	37,339.88 64.6 4,879.85 8.4	31,886.55 66. 3,489.35 7.
	42,209.85 73.8	35,215.98 73.
Gross Profit	15,625.85 27.8	12,468.62 26.

Your Apple can generate instant income statements (with expense ratios) or balance sheets, and let you compare them to last month's or year's, then print them out to suit your banker.

feature allows you to make credit decisions based on the most current information).

You can also list your purchases by discount dates. And take advantage of them in no uncertain net terms. You can even keep payroll records

without paying more, because it's part of the same package.

#### Profit from history.

In business as in life, experience is the best teacher. And the Apple/BPI system can provide you with instant comparisons of this-month-this-year vs. this-month-last-year, or this-year-to-date vs. last-year-to-date.

So you can quickly spot changing expense ratios and make decisions with

ratios and make decisions with 20/20 foresight.

The BPI General Accounting Package also lets your income statements be coded by location, department or product line. So you know where your money's coming from.

And where it's not.

Ichiban Fish Supply Company . Merchandise Purchased By Due Date As DF 05-31 83					
Date	Vendor Ho. Hame	Invoice Humber	Acct No.	Detail	Het Amt
85/82/83	1 Herring World Due: 06/03/83	35278532	5010-01		501.23
85/85/83	2 Consolidated Co Due: 06/05/83		5010-01		209.36
05/05/83	3 Levy Sushi Fare Due: 06/05/83		5010-01		459.00
05/05/83	4 Mussel Men, Inc Due: 06/05/83		5010-01		68.20
					1,237.8

It can also allow you to take full advantage of merchandise discounts. So you'll know whom to pay, when to pay, how much to pay—and save a lot of clams in the process.

#### Make a timely statement.

Add an Apple Dot Matrix or Daisywheel printer to your Apple III, and you can print out your entire balance sheet in minutes.

Or any number of reports, from cash receipts to payroll ledger to income. You can even print checks and customer statements.


The impressively professional



results will make an important statement to everyone you deal with—including your banker.

#### More ways Apples pay.

There are more people in more places doing more things with



To avoid fishy transactions, you can instantly display customer's payments, charges and current balance. In this case, a few more cans of tuna would put Mr. Moser over his \$2,000 limit.

Apples than with any other personal computer in the world.

Because for one thing, there's more software for Apples than for any other personal computer in the world. So the same Apple that handles all your accounting needs can also handle financial spreadsheets, word processing and electronic filing.

You'll also find programs that are designed specifically for your kind of business. Be it dentistry, architecture or swine herding.

Of course, the best way to learn all the ways Apples can help you make better business decisions is to visit any one of over 1500 authorized Apple dealers.

So drop in. For a full account.



The most personal computer.

Call (800) 538-9696 for the location of the authorized Apple dealer nearest you, or for information regarding our National Account Program.

Or write Apple Computer Inc., Advertising Department, 20525 Mariani Avenue, Cupertino, CA 95014. © 1983 Apple Computer Inc.

Circle No. 35 on Free Information Card

#### .. COMPUTER GAMES

use them before you lose the game. When you lose your Wizard (or Sorceress) the game is over—just as a chess game ends when your King is checkmated.

There are so many built-in, adventure-like variations and combinations that it's really impossible to do them justice in a short review. The game rates extra high on the scales.

#### ZAXXON

Cassette or Diskette for Atari 400/800 DataSoft, Inc., 9421 Winnetka Ave., Chatsworth, CA 91311; 213-701-5161. \$39.95

Graphics \*\*\*\*
Gameplay \*\*\*\*
Sustained Interest \*\*\*\*
Type: Joystick action game
Memory Required: 16K cassette; 16K or
32K diskette

Zaxxon is already enshrined among those favorite arcade games that we'd like to be able to bring home, and DataSoft has finally made it possible. The game is currently available in three versions: a 16K cassette and a diskette with both 16K and 32K versions (one on each side) for the Atari computer and a 48K disk for the Apple.

The game presents a three-dimensional scene as you pilot your attack jet fighter through four different screens attacking first the enemy's floating fortress complete with walls, laser barriers, anti-aircraft cannon, and the hazard of crashing into the very objects you want to blast to smithereens. Your view of the screen is at an angle so you can watch the three-dimensional scenario. You move your fighter up and down and from side to side; your control is complete, but you can easily get blasted.

Finish the first screen (fortress) and you face an armada of defending enemy jet fighters. Screen three is a much more difficult fortress with really difficult laser barriers. This is where some fancy flying comes in handy. As with the arcade version, about the only way to gauge your altitude properly for squeezing safely through these barriers is to shoot at the wall and see where your



cannon shells explode. Then gauge your approach altitude accordingly.

If you succeed in getting through this screen, you face the deadliest challenge of all—the armored robot. I haven't succeeded in getting this far yet, but the game is exciting and an unbelievable grabber. Just when I thought I had finally outgrown all of those outer-space type shoot-em-ups, this one had to come along! It's actually kept me up later than some of my all-time favorites, which I won't mention here.

Like so many computer games, skill develops with time and practice. Unlike many such games, smaller memory versions are missing some of the refinements. The 16K version, for example, has no surface-to-air missiles defending the enemy fortress. Also, you can't change your ship's altitude during the outer-space dogfight with the enemy fighters.

If you have a choice, and especially since the price is the same for all versions, don't get the cassette; it takes forever to load into the computer. When using the diskette version, start with the 16K game and play it until you get more proficient. Then switch to the 32K side of the diskette. Also, if you have a printer/modem interface for your Atari, make sure it's turned off before loading, or you'll find the game erasing from RAM each time you lose your third attack fighter.

#### **ANDROID**

Diskette for Atari 400/800
PDI (Program Design, Inc.), 95 East
Putman Ave., Greenwich, CT 06830;
203-661-8799. \$29.95
Graphics \*\*\*\*

Gameplay \*\*\*\*
Sustained Interest \*\*\*
Type: Joystick maze and action game
Memory Required: 40K + Atari BASIC
cartridge

Maze lovers will jump into this disk with both feet. According to the directions, it's really two different games: "Android" and "Captivity"—but in reality, it's just two different kinds of maze games with the same basic diskette.

Like PDI's earlier release, "Moonbase IO", this disk is accompanied by a voice-track cassette that plays through your Atari's cassette recorder, if you have one. Unlike Moonbase IO, playing the cassette isn't really necessary; it contains no control tracks for the gameplay, but the sound track definitely makes the game more interesting. It supplies the robot-like voice of your remote-controlled Android which has

traveled to the black asteroid beyond Jupiter's orbit. The android tries to seize treasures hidden in the labyrinth beneath the asteroid's surface.

The sound track is ingenious and amusing, containing the android's mechanized voice reporting on various status elements—such as, "Radioactivity present, earthquake potential," and "Coke machine operational" (Coke machine???). You find out that it's a real Coke machine, as the android dumps some change into it and then says, "Darn it, I just lost my quarter." Apparently soda is a lot cheaper once you enter the dark asteroid's labyrinthine treasure house.

The treasures are guarded by armed robots, and you need to retrieve keys to get from one level to the next. There are two screens—an overall view of the maze from the top, showing your location—and an eye-level three-dimensional view of the maze from the top, showing your location—and an eye-level three-dimensional view with excellent graphics. In Version 1, a compass pointer indicates which direction you're traveling with the overview of the maze as your map vantage point. Version 2 eliminates the compass and is therefore much harder.

There are natural hazards—such as absorbing too much radioactivity, or getting hit by a blast from a robot guardian. A time bomb can also explode catching your android in its blast, and there's an engulfing slime which is very dangerous. Earthquakes come and go at random, knocking down walls and blocking corridors—often the very ones you wanted to explore. Also, your android can simply run out of energy—in all of these cases, the game ends when your android is destroyed. If you can't complete the tasks, you can at least go for points when new at the game.

The Captivity version is a straight maze/escape game in which you have to find your way out of the maze in a given time period. There are 10 versions with a compass and 10 versions without. Every time you take a peek at the overhead view, it costs you points.



# After you ask what it can do for you now, ask what it can do for you later

If you're about to buy a personal computer, you need to consider two basic

issues: What your needs are now, and what they're likely to be a few years from now.

That's why the HP-86 has to be your best choice. It's got the software and the hardware to go the distance.



Dow Jones/ News Retrieval Service, or a number of other nation-

wide information sources. When the time comes for more, consult our 450-page software catalog.

Chances are, you'll find what you're looking for.

#### Software for today and tomorrow.

Save \$255\* on the Personal Productivity Pac. Here's

a good way to get started. With software that, if bought separately, would cost you \$750.\*\* We're offering it at the reduced price of \$495.\*\* You'll get VisiCalc® PLUS, the world-famous electronic spreadsheet for "what-if" planning. (The "PLUS" is a Hewlett-Packard bonus: extra programs

to quickly turn your spreadsheet into bar graphs, line graphs, or pie charts.) Plus WORD/80, for word processing. And FILE/80, for record keeping without paperwork.

**CP/M.**® Buy this plug-in module, and you'll extend your HP-86 system to accept many popular programs written under the CP/M operating system—programs such as WordStar™ and dBASE II.™

Graphics Presentations. When combined with the HP 7470A plotter, our graphics software lets you produce professional-quality pie and bar charts, line graphs, text pages, and overhead transparencies. And you can do it all in color.

**Data Communications.** If you decide you want it, an optional accessory lets you access The Source, the

#### Hardware that expands with your needs.

While your computer's ability to expand depends largely on software, naturally, the hardware must keep up. That's why the HP-86 system has a modular design. So you can add a printer or plotter as easily as you hook up a tape deck to your stereo. And operate up to 14 peripherals at once, if you wish.

When you find yourself facing lengthy problems or spreadsheet analyses, simply add more memory — up to 640K bytes.

As you demand more of your HP-86, you'll find that it keeps up. Whether you need a broad range of hardware, software, or peripherals, the HP-86 makes expansion easy, giving you a hard-working system tailored to help solve your specific problems.

If you need more good news, try this: The basic system is only \$2820 \*\* (128K computer/keyboard, 12" monitor and single 3½" disc drive).

Get a hands-on demonstration of the system that works for you now, and will still be working for you later.

For the authorized HP dealer or HP sales office nearest you, call TOLL-FREE 800-547-3400 and ask for operator 96. M-F, 6 a.m.-6 p.m. PST.

\*Software savings are based on suggested U.S. list prices and may vary.

\*\*Suggested retail price. May vary outside U.S.

VisiCale is a registered trademark of VisiCorp.

CP/M is a registered trademark of Digital Research, Inc.

WordStar is a registered trademark of MicroPro.

dBASE II is a registered trademark of Ashton-Tate.


PG02320 209D

Personal computers & calculators for professionals on the move.



The future belongs to the creative electronics technician.

# NEW FROM INC. DESIGNATION DESI

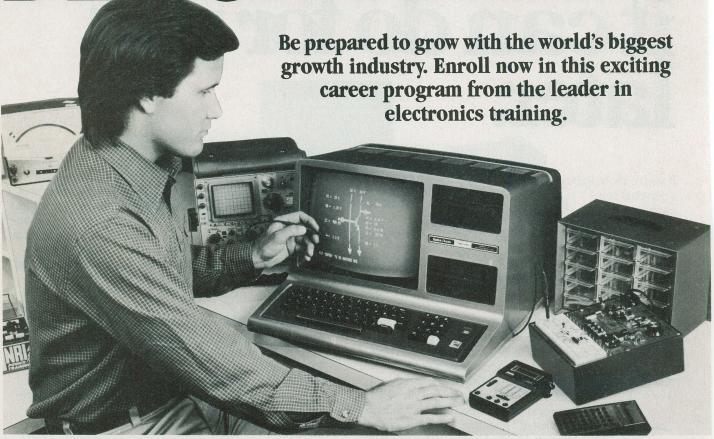

There are a lot of good jobs out there in electronics. But the best jobs go to the people who can think and work creatively. Those who can conceive and design circuits and equipment...those who can initiate ideas and carry them through... those who can turn theoretical concepts into reality. These are the people commanding up to \$18,000 as starting salaries, earning \$30,000 or more with experience and ability. And NRI can help you join their company.

#### The First Complete Program of Its Kind

Now, for the first time in the history of home study, NRI offers you a new and exciting course in Electronic Design Technology. A course that starts with the fundamentals and builds from there to

prepare you for an electronic career where the growth is. You're trained for exciting jobs in the creation of communications equipment, computers, consumer products, anything that needs electronic circuits.

Only NRI gives you such complete and concentrated training in the design of electronic circuits. And you learn at home in your spare time, without quitting your job or wasting time, travel, and gas going to night school. You learn with NRI-developed training methods that combine knowledge with practical experience.


#### NRI Circuit Designer Gives Hands-On Experience

You learn by doing. No ivory-tower, strictly theoretical course here. You actually design and build modern electronic

circuits, run tests, and verify specs. You learn how various systems interact, design your own circuits to perform specific tasks,



# ELECTRONIC LOGYTRAINING

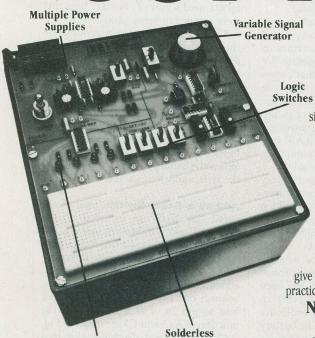

**Breadboard** 

Connector

learn to look for better ways and new ideas.

**LED Logic** 

**Indicators** 

The NRI Circuit Designer is a totally unique instrument with full breadboarding capability, built-in multiple power supplies and a multi-function signal generator for circuit testing. Fast, simple connections let you build up prototype circuits, immediately check them out for function or faults. It handles both linear and digital integrated circuits as well as discrete components such as transistors and diodes. Six practical lab units carry you through both the theoretical and practical world of electronic circuit design.

#### Professional Working Instruments

Your course also includes the professional multimeter with 3½-digit liquid crystal display to give you fast, accurate readings of voltage, current, and resistance. Slide switches let you select range and function quickly and easily. You also

get the famous Texas Instruments TI-30 engineering calculator to speed and simplify circuit analysis and design. It's a true engineering instrument that includes trigonometric functions as well as square root, logarithms, and memory. Together with your Circuit Designer, they work to give you a sound basis of practical experience.

> NRI Fast-Track Training

Although the NRI Electronic Design technology program carries you through advanced electronics, the unique NRI lesson concept simplifies and speeds learning. Especially written for individual instruction, each lesson covers its subject fully and thoroughly. But extraneous material is eliminated, language is clear and to the point, organization is logical and effective.

You'll start with subjects like Fundamentals of Electronic Circuits, progress rapidly through Circuit Theory to Solid-State Electronics and on to Digital Electronics, Computers, and Microprocessors. Hand in hand with your theory will be practical Design Lab experiments, circuit demonstrations, and test/measurement procedures that make it all come to life.


#### **No Experience Necessary**

You need absolutely no electronic experience to be successful with this modern course. If you're a high school graduate with some algebra, you should handle it without any trouble. We even include, at no extra charge, the NRI Math

Refresher Module, designed to help you brush up on your math and teach you any new concepts you may need from basic algebra through phasors and circuit analysis.

#### Free Catalog, No Salesman Will Call

There's so much to tell you about this exciting new course for the electronic 80's, we can't do it all here. Send the



postage-paid card for our free, 100-page catalog with all the facts about this and other NRI electronics courses. We'll rush it right to you without obligation. Look it over and discover for yourself why only NRI can prepare you so well for your future. If card has been removed, please write to us.



#### **NRI SCHOOLS**

McGraw-Hill Continuing Education Center 3939 Wisconsin Ave. Washington, D.C. 20016

We'll give you tomorrow.

#### LES SOLOMON ON COMPUTER HARDWARE



#### A "truly portable" Sinclair/Timex

WOULDN'T it be nice to be able to enter a program in your Sinclair/Timex computer and, when you remove the ac power, have the program remain in memory? This, of course, makes the Sinclair/Timex a truly portable computer that can be carried from video terminal to video terminal (or TV receiver to TV receiver). I'd like to tell you how you can do it by building a very simple add-on circuit for your computer. I'll also show you a simple little circuit that will reset your T1000 when you want to "start over."

Even you are not interested in portability, the circuit to be discussed adds one other very useful feature—it provides an uninterruptable power supply that maintains the computer's data integrity if it is connected to the wall socket and commercial power fails.

The circuit (Fig. 1) is a basic diode switcher that has been around for many years. When the power supply is delivering a voltage higher than that of the battery, silicon diode DI is forward-biased (acts like a closed switch), while silicon diode D2 is reverse-biased (acts like an open switch). This effectively

isolates the battery from the system. Thus, the line-operated power supply runs the computer. If the line-operated supply is removed—either by physically unplugging the supply from the wall socket or if power fails for any reason—D2 becomes forward-biased, D1 becomes reverse-biased, and the battery supplies power to the computer. Battery power cannot be fed back to the wall unit (a possible discharge path) since, under these conditions, reverse-biased D1 acts as an open switch.

Now, which battery to use? A conventional 9-V transistor radio type will run a minimum computer, but since its 9 V is higher than the approximate 7 V supplied by the wall-supply that comes with the computer, it will soon run down to 7 V—a waste of power. Besides, a conventional 9-V radio battery is limited as to how much current it can deliver over a long period. When RAM or a printer is added to the basic computer, the power demands increase rapidly.

There is one battery that works very well, and best of all, you can get it free. And this battery can deliver 6 V with a lot of current for quite a long time.


I'm talking about the flat battery that comes in Polariod film packs. If you know anyone with a Polariod camera, ask him to save you the plastic frame that is left after all the film has been used up. (The frame is usually thrown away.) Break open the plastic enclosure and you will find a flat, very thin battery about 2" by 3". Electrical connections are made via a pair of metallic contacts on one side. You can determine, and mark, the polarity of the two contacts.


If you are into hardware experimentation, get a couple of these special batteries and use low-value (high wattage) resistors as a load while monitoring voltage across it. You will be surprised at the amount of power.

In the circuit shown here, the two diodes, the Polariod battery, and the physically small POWER switch were fitted together and covered with a layer of black electrical tape. A connector was used to interface to the plug at the end of the wall-mounted supply, and a small cable terminated with a suitable plug was used to connect the package with the computer's power input receptacle. Since solder doesn't adhere very well to the two electrical contacts on the battery, I used a pair of "bobby" pins that were scraped to make good contact.

The taped package can be mounted to the top surface of the computer using double-sided adhesive tape, with the output cable plugged into the computer input receptacle. When the wall supply is plugged into the battery package, and the POWER switch turned on, the system works as normal. When the wall supply connector is removed (or wall power fails), the battery runs the system. When the battery runs down, simply slit the tape, and wire in a new battery.

Adding a Reset Switch. One of the small "goodies" not included on the Sinclair Timex T1000 computer is a "reset" switch to be used when things really go berserk. If you do any programming, you know what that means. To add a reset switch to these machines, connect one end of a slender insulated lead to pin 26 of IC3 (Z80) or to the junction of R15 and C5 as shown in Fig. 2. Connect one end of a similar slim lead to any ground pad. Connect the free ends of these two leads to the connectors of a physically small, normally open pushbutton switch (makes no difference which lead goes where). Mount the pushbutton switch as desired on the plastic enclosure and mark it RESET. Now, when the screen goes blank at any time, depress this switch for a restart. ◊

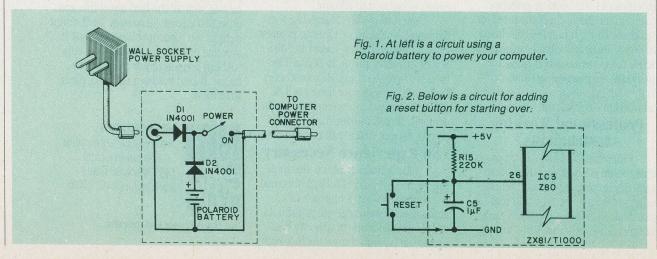

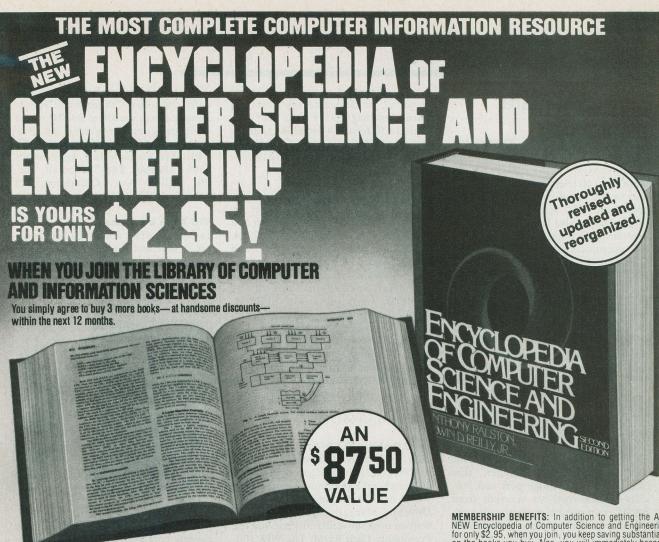

#### This up-to-date Second Edition contains:

- Over 1,670 pages of revised, expanded, and updated text
- 550 articles on virtually every aspect of the computer sciences
- Written by 301 distinguished authorities
- Profusely illustrated with over 500 photos, and over 250 diagrams, graphs and charts

ust published, the ENCYCLOPEDIA OF COMPUTER SCIENCE AND ENGINEERING. Indispensable to consultants, business people, data processing professionals, and enthusiasts, it is a veritable data base of information on:

- Hardware
- Software
- Programming languages
- Artificial intelligence
- Computer applications
- Personal computing and much more!

The Encyclopedia is organized to make finding and using its wealth of information an ease. Articles are alphabetically arranged and are cross-referenced to related articles and to specific subject matter. The clear and expanded appendices include abbreviations, acronyms, special notation and terminology, as well as numerical tables, the mainstay of applied technologies. A complete 5,000-term index contains

references to sub-categories, doubles as a computer science dictionary, and is an invaluable tool for locating specific information.

#### Praise For the First Edition:

Called "Impressive...comprehensive... well done" by *Datamation*, and "...a real treasure cache" by *Business Management*, the new Second Edition promises to eclipse *Computer Management's* statement on the original of "There isn't another book like it." Send for your *free* 10-day trial.

The Library of Computer and Information Sciences is the oldest and largest book club especially designed for the computer professional. In the incredibly fast-moving world of data processing, where up-to-date knowledge is essential, we make it easy for you to keep totally informed on all areas of the information sciences. In addition, books are offered at discounts up to 30% off publishers' prices. Begin enjoying the club's benefits today!

MEMBERSHIP BENEFITS: In addition to getting the ALL NEW Encyclopedia of Computer Science and Engineering for only \$2.95, when you join, you keep saving substantially on the books you buy. Also, you will Immediately become eligible to participate in our Bonus Book Plan, with savings of up to 70% off the publishers' prices. At 3-4 week intervals (16 times per year) you will receive the Book Club News, describing the coming Main Selection and Alternate Selections, together with a dated reply card. If you want the Main Selection, do nothing and it will be sent to you automatically. If you prefer another selection, or no book at all, simply indicate your choice on the card, and return it by the date specified. You will have at least 10 days to decide. If because of late mail delivery of the News, you should receive a book you do not want, we guarantee return postage.

#### The Library of Computer and Information Sciences 7-845

(the oldest and most respected computer book club in the world)

Riverside, New Jersey 08075

Please accept my application for trial membership and send me the ALL NEW Encyclopedia of Computer Science and Engineering (44904) for \$2.95. This 1,670 page volume contains 550 articles and over 700 charts and photos. I agree to purchase at least three additional Selections or Alternates over the next 12 months. Savings range up to 30% and occasionally even more. My membership is cancelable any time after I buy these three books. A shipping and handling charge is added to all shipments.

No-Risk Guarantee: If you are not satisfied—for any reason—you may return the Encyclopedia within 10 days and your membership will be canceled and you will owe nothing.


will owe nothing.	oronip will be carrected and you
Name	
Name of Firm(If you want subscriptio	h sent to your office)
Address	Apt
City	
State	ZipZip
slightly higher in Canad	a.) Computer & Electronics 8/83

#### COMPUTER SOURCES

#### Hardware

IBM Autodialer Modem. The PC212A is a Bell-compatible 212A modem that fits into any slot in the IBM-PC. It can store up to 10 telephone numbers, operates to 300 bps asynchronously in low speed, and 1200 bps synchronously in high speed. It also features an RS232C asynchronous serial port with an internal microprocessor allowing control, operation, and optioning of the modem from the IBM-PC keyboard. A "Help" list of commands is provided, and the modem features auto/manual dial, auto dial next number if first number is busy, instant re-dial once or until answered, and single keystroke dialing of last number dialed even if it was not one of the 10 stored. Battery protection is provided. \$495. Address: Rixon Inc., 2120 Industrial Pkwy., Silver Spring, MD 20904 (301-622-2121).

TRS-80 Multi-Function Board. The CMJ-IF is a multi-function subsystem for the TRS-80 Color Computer and the TDP-100 Personal Computer, that plugs into the cartridge port and provides speech synthesis accessed from BASIC, two parallel ports allowing the use of a parallel printer, two counter/



timers for use as a real-time clock, a serial communications port for serial printers or modems, and an extender port that enables the user to access a disk controller or ROMpack. 4K or 8K bytes of EPROM/ROM space is also provided. Under \$200. Address: Magnum Distributing Inc., 1000 S. Dixie HY #3, Pompano Beach, FL 33060 (305-785-2002).

Floppy Protection. The Infoguard is a magnetically shielded floppy-disk enclosure that protects the diskette against X-rays or magnetic damage during shipping. These include accidental exposure to magnetic environments due to lightning storms, passing nearby radiating electric/electronic equipment,

power generating equipment, careless handling, or deliberate vandalism via permanent magnets. \$9.50 for 51/4" size, and \$14.50 for the 8" version. Address: Ad-Vance Magnetics, Inc., 625 Monroe St., Rochester, NY 46975 (219-223-3158).

Apple EPROM Programmer. The Model 2300 EPROM Programmer for the Apple II can handle TI 2516 and 2532; Intel 2716, 2732, 2732A, 2764, 27128, and 2816; and SEEQ 5213 and 5213H. The modes of operation include EPROM to disk file, EPROM to memory buffer, read/print contents of EPROM, verify erasure of EPROM, load and program disk file into EPROM, program memory buffer contents into EPROM, read/print memory buffer contents, modify contents of memory buffer from keyboard, and program EPROM addresses directly from keyboard. \$429. Address: Software Specialties Inc., 305 Larchway Dr., Springboard, OH 45066 (513-748-0471).

Hard Disk for TI 99/4. The WDS/100 Disk and Controller System allows up to 10M bytes hard disk to connect to the TI Peripheral Expansion System in a TI 99/4A or 99/4 computer. The Unix-like Directory Management System is resident on both the utility diskette and the Personality Card ROM. The WD/100-5 stores 5M bytes while the WD-100-10 stores 10M bytes. Cost is \$2599 and \$2999 respectively. There is a clock option available for \$50. Address: Myarc, Inc., PO Box 140, Basking Ridge, NJ 07920 (210-766-1700).

IBM Winchester. The Interface Series of Winchester drives for the IBM-PC is available with 5.3M bytes (\$1695), 10.6M bytes (\$1995), and 15.9M bytes (\$2295) of formatted storage. Each system includes all pertinent hardware and software (JEL) for 1.1 DOS. There are 345 tracks/inch. Track-to-track access time is 2 ms, and average access time is 85 ms. Other features include a 512-byte full sector buffer, a 32-bit ECC, and automatic interleaving capabilities. Operation is also provided on 220/240 volts at 50 Hz. Address: Interface Inc., 7630 Alabama Ave., Canoga Park, CA 91304 (213-341-7914).

**System Controller.** This 4" by 4½" controller on a board features a Z8671 that contains a Tiny-BASIC interpreter, up to 6K bytes of RAM and EPROM, an RS232 serial interface with selectable baud rates, and two parallel ports. The system is expandable to

124K bytes and is optimized as a dedicated controller. Connecting a CRT terminal allows immediate BASIC or machine-language programming. Programs can be transferred to 2732 EPROMs for autostart applications. \$199. Address: The Micromint, Inc., 561 Willow Ave., Cedarhurst, NY 11516 (516-374-6793).

VIC Tape Interface. The Vik-Dubber cassette interface allows VIC-20/64 users to save and load data using a standard cassette tape recorder. It also allows connecting two cassette recorders at the same time to make backups. An



indicator is provided to help adjust the cassette controls for proper operation. Power comes from the computer so no batteries are required. \$34.95. Address: Bytesize Micro Technology, PO Box 21123, Seattle, WA 98111 (206-236-2983).

Apple Remote Control. The PC-1 plugs into any I/O slot on an Apple II or II+ and provides control of up to 256 Leviton/BSR remote control devices via the normal household power line. The device both sends and receives digital commands at the line carrier frequency of 121 kHz. Included on the board is a bi-directional carrier interface, a CMOS real-time clock with battery backup of two months life and full recharge capability, and switchselectable interrupts of one hour, one minute, one second, and 1024 Hz. Demonstration software is provided on disk. On-board firmware (2K of ROM) holds all system software, no additional memory is required. \$265. Address: Bi-Comm Systems, Inc., 10 Yorkton Industrial Court, St. Paul, MN 55117 (612-481-0775).

**TTL Pinouts.** The MicroChart #6 covers pinouts for virtually all 54/7400 TTL ICs on its two-sided, two-color,

full-page plastic sheet. The data covers the part number, family type, description, and pin out. The data is reduced from some 500 pages of data books. \$5.95. Address: Micro Logic Corp., PO Box 174, 100 2nd St., Hackensack, NJ 07602 (201-342-6518).

#### Sinclair/Timex Analog Interface.

The high-speed analog interface board features eight channels of A/D and eight channels of D/A for the Sinclair/Timex machines. The board plugs into the rear expansion connector, and on-board jumpers and switches permit maximum versatility. Sequential A/D conversions can occur at 200K samples per second. The electrical specifications include 1.6-µs A/D conversion time with 100-ns sample-and-hold window; 1-μs D/A settling time with 0.13 V/μs slew rate; 2.5- or 5-volt full-scale option; and eight bits resolution and accuracy. \$195 with manual. Box and cable is \$15. Address: Computer Continuum, 301 16th Ave., San Francisco, CA 94118 (415-752-6294).

IBM Telecommunications. The PConnection is a plug-in for the IBM-PC that contains a direct-connect modem, a real-time clock, and an additional serial I/O port. The modem is Bell 103/113 compatible and provides autodial (Touch Tone or pulse dialing), and autoanswer in both answer and originate modes. The asynchronous card also contains an additional RS232 port. A firmware timer manages dialer routines, and an autodisconnect is provided in case of failure or carrier loss. The real-time clock allows the board to autoanswer the telephone or autodial predetermined telephone numbers at a preset time. \$375. Address: Microperipheral Corp., 2565 152nd Ave., NE, Redmond, WA 98052 (206-881-7544).

#### Software

Terminal Program Operates up to 9600 Baud. MicroTerm, a new terminal program for TRS-80, IBM, Zenith, and Apple computers, features both standard ASCII and error-free, directline transmissions. It has a function that allows the operator to have up to 10 user-defined keys that transmit up to 63 characters at a single stroke. The program will adjust video width, turn on the printer, open the buffer and do many other things before returning to the terminal mode without missing any information. It can emulate any kind of terminal hardware and auto dial up to

#### The Safe Video Head Cleaner is Dry.

Yes, dry!

The Discwasher® Video Head Cleaner is the only truly nonabrasive dry head cleaner on the market today.


Its superior cleaning action is the result of its textured fabric matrix, not the result of abrasive properties (like those often utilized in aluminum oxide cleaners). This exclusive matrix safely cleans not only the video heads, but the audio and sync heads as well.

The Discwasher Video Head Cleaner is less abrasive than both the video head and video drum. In fact, it's even less abrasive than video tapes themselves.

And best of all...it works. Easily, safely, and quickly.

discwasher VIDEO HEAD CLEARER VI

The graph below represents approximate hardness ratings of individual VCR components and various tapes and cleaners using the Temper scale, developed by industry to measure materials. A diamond, one of the hardest materials known, rates T-10.



#### discwasher

1407 N. PROVIDENCE RD., P.O. BOX 6021, DEPT. CE, COLUMBIA, MO 65205 USA A DIVISION OF JENSEN an ESMARK Company

Circle No. 66 on Free Information Card



#### ... COMPUTER SOURCES

10 preset numbers at the touch of a key. It fully supports most major brands of modems. Spooled printer output allows even slow printers to stay on line with the MicroTerm system. \$70 for any version. Address: Micro-Systems Software Inc., 4301-18 Oak Circle, Boca Raton, FL 33431 (800-327-8724).

Circuit Analysis Program. ACNAP is an ac circuit analysis program available for 8" or 51/4" CP/M machines, or TRS-80 Model I/III with TRSDOS. It is designed to analyze circuits consisting of resistors, capacitors, inductors, a voltage source, and controlled current sources. It can calculate a 5-node circuit in 0.8 seconds. It also works with component tolerances to provide worst-case and Monte Carlo analysis. It calculates the minimum, maximum, mean, and three sigma points of a circuit's gain and phase response to any frequency input including linear or logarithmic frequency sweeps. It can also calculate the circuit's noise-equivalent bandwidth. Other design utilities are also provided. \$39.95. Address: BV Engineering, PO Box 3351, Riverside, CA 92519 (Tel: 714-781-0252).

Language Teacher. Using the Hangman format, and designed for the TRS-80 Model I, III, and 4 computers, these programs are available in Spanish, French, and Latin. Other programs cover literature, word power, and German and Russian practice. \$29.95 per program. Address: George Earl, 1302 South General McMullen, San Antonio, TX 78237.

Numismatics. The Coin Collector for the Apple II series consists of six programs in which collection information can be entered, deleted, changed, searched, sorted, and printed. It catalogs foreign or domestic lists by denomination, country, description, year, value, or source. A Meeting List allows sorting and selecting meetings by date and location, a Source List gives sources for coins, supplies, and information on trades and liquidations. The File Transfer utility allows transferring data to other computer via phone links. \$49. Address: Andent, Inc., 1000 North Ave., Waukegan, IL 60085 (Tel: 312-223-5077).

**IBM-PC Communications.** RELAY enables one IBM PC to link to another, act as a TTY, an APL terminal, or a 3270 device. It provides full error detection and correction while transferring data in both directions at the same time.

Features include full support for autodial and autoanswer modems, simultaneous exchange of files and messages between PCs while printing and editing locally, split screen communication between PCs, directory of frequently used services, support for APL with a substitution character set, 3270 emulation on VM/370, full screen editor, and an unattended mode for sending and receiving files without an operator. \$149. Address: VM Personal Computing, 60 E. 42nd St., NY, NY 10165 (Tel: 212-697-4747).


Casino Blackjack. Casino Blackjack Counter/Tutor for the TRS-80 Models I and III teaches play strategy as well as point counting. The program will suggest the best possible play for any hand. Five hands are shown with the computer playing the first two hands, the player the middle hand, and the computer the last two hands. All cards are played face up to facilitate point counting. Three dealing speeds are provided, and with each bet opportunity, the program will show the correct count is requested and

make a recommendation on the size of the bet. The player can play against one to six decks. Requires a TRS-80 Model I or III, 32/48K disk system. \$21.95. Address: Manhattan Software, PO Box 1063, Woodland Hills, CA 91365 (Tel: 213-453-6943).

Commodore 64 Programs. DIARY 64 keeps track of phone numbers, birthdays, appointments, etc., and files by dates or page number. \$59.95. CHECK-BOOK MANAGER has a capacity of 250 checks, 100 deposits, and 50 account charges. It has built-in password security. \$39.95 for disk, \$34.95 for cassette version. 64 MAILING LIST holds 250 names and addresses per file and features full screen editing, and sort. \$34.95 for disk, \$29.95 for cassette. VA-NILLA PLOT features 19 editing commands for Turtle Graphics to change directions and draw lines of any length. The Turtle has a pallette of 16 colors. Sound is also available. \$29.95 for disk or cassette. Address: Computer Marketing Svcs., 300 W. Marlton Pike, Cherry Hill, NJ 08002 (Tel: 609-795-9480).

Logic Design. Micro-Logic enables engineers to draw logic diagrams directly on a CRT screen. The net list required for simulation is automatically generated from the diagram, or may be directly typed in. A timing-level simulation can be performed to evaluate design before building hardware. The system will handle 500 to 2000 gates with all gates

user-programmable as to delay, truth table, and input/output clocking. The system also handles macros of up to 16 pins enabling direct modelling of 16-pin MSI functions. Currently available for IBM-PC with Apple II coming soon. \$450. Address: Spectrum Software, 690 W. Fremont Ave., Suite 11, Sunnyvale, CA 94087 (Tel: 408-738-4387).

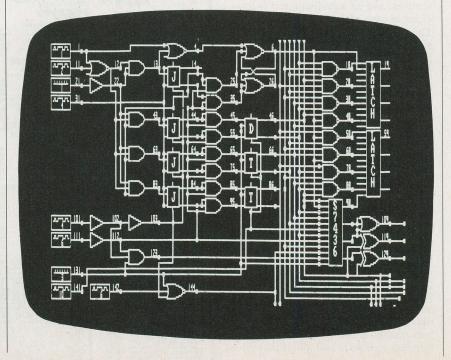

No wonder they call it the SUPERFONE!

#### At Last—a Cordless Phone with TWICE the Range, Sound Fidelity to Rival Phones with Cords, and a Privacy Code System—All This in a Phone Less Than an Inch Thick!

The Super Fone is less than 1" thick. The base unit has a built-in speaker phone, a fully independent intercom and is 110 volt-220 volt switchable.

Until now, cordless phones have given you wonderful convenience. But they've had two problems:

1. The range is limited to 600 to 700 feet. 2. Some of them sound as though

you're talking inside a barrel. As cordless phones have become enormously popular, another problem has arisen: two people, living near each other, can have the same channel. Not only is there line confusion, but someone else can literally make a long distance call on your phone.

No more. Never again.

#### Range: 1500 Feet OR MORE!

The SuperFone 650 uses state-ofthe-art electronics to bring you the ultimate cordless phone. Sound quality is superb — and it stays superb, 1500 feet or more from the base station. That's more than twice the distance of standard cordless phones.

Only SuperFone 650 has a secret code system to prevent interference and false operation of the phone. You choose from 512 possible "code" combinations. Both the base unit and the phone are locked onto that code, which you can change when you want to.

No other phone can interfere. No other unit can share the signal. No one else can hear or speak on your carrierwave.

#### **Enormous Range**

We say the SuperFone 650 has a range of 1500 feet.

Notice we didn't say "up to" or "as far 1500 feet. There's no hedging, because this seems to be the minimum,

not the maximum range.

Users report 1800 and 2000 feet. That's nearly half a mile. SuperFone 650 is a radiophone, not a toy, and that's why its signal doesn't break up or start hissing or crackling when you get half a block away.

You can tell when you heft it. It's a Little Giant. You can feel the power inside. What a marvel of electronic engineering it is! And it's tough, too. It fits into your shirt pocket, and you can bounce it around all day without damaging it.

#### Speakerphone, Intercom — Everything!

SuperFone 650 is The Everything Phone. Anything any phone can do, it can

First, the base station is a speaker phone. Touch a button and you can have a hands-free conference conversation in the room in which the base station sits.

Next, it's an intercom. You can page the handset from the base unit and have a private conversation. You have a true wireless intercom, not just a signal.

Third, you have a privacy button. Push that button and you'll still be able to hear anything the other party says, but he or she won't be able to hear you until you take the button off "hold."

Fourth, you have an automatic redial.

Touch the key and the SuperFone will

redial the last complete number.

What else? A security switch which makes it impossible for anyone to call out on the remote phone, without changing the ability to receive calls. A volume control for the speaker on the base unit. A call button to page the base from the cordless phone. THIS PHONE HAS EVERYTHING!

#### 30-Second Installation

Plug your SuperFone 650 into any wall AC outlet. Push its standard modular terminal into the telephone plug. You're in

Every component is heavy-duty, from the built-in condenser microphone (with automatic gain control) to the LED indicator lights. This phone is designed for hard use.

The SuperFone 650 is yours for \$249.95 in regular pulse-dial version, \$269.95 in Touch Tone®. If you want the SuperAntenna with it, giving you a range of a mile — or even more — you can have both for \$319.95 (rotary pulse) or \$339.95 (Touch Tone). Or you can get the SuperAntenna alone for \$79.95.

#### We Absolutely Guarantee!

Use the SuperFone 650 (or any electronic instrument you acquire from us) for up to 30 days. If for any reason you decide not to keep it, return it for a 100% refund.

The SuperFone 650, rotary pulse dial — \$249.95 phone and SuperAntenna — \$319.95. The SuperFone 650, Touch Tone dial — \$269.95 phone and SuperAntenna - \$339.95. The SuperAntenna,

no phone included - \$79.95.

Multi-Line Adapter, lets you plug several lines into one SuperFone — \$39.95. Add \$4.50 per total order for shipping. Circle No. 17 on Free Information Card

Rotary Phone or Touch Tone ®? SUPERFONE Is Available For Either!

Most cordless phones work on "pulse" (rotary) only. You can't use them for MCI, Sprint, or any of the other systems requiring

TouchTone — including talking to a computer.

The SuperFone 650 now has a Touch Tone model, so you can have the unmatched double convenience of a cordless phone and tone dialer!

(Touch Tone model slightly higher.)

#### TRIPLE THE RANGE OF ANY CORDLESS PHONE!

The SuperAntenna will give your cordless phone, regardless of make or model, three times the range it has now.

If the range is 700 feet, it'll leap to over 2,000. If it's 1500 feet, it could be as far as one mile!

Easy to install. Only \$79.95 complete. Add \$4.50 for shipping.




For instant service, if you have a VISA or MasterCard, call toll-free 24 hours a day, seven days a week:

1-800-824-7888

Ask for Operator 551. (in California: 1-800-852-7777)

NEW HORIZONS

Dept. CE8, 1 Penn Plaza, Suite 100 New York, NY 10119

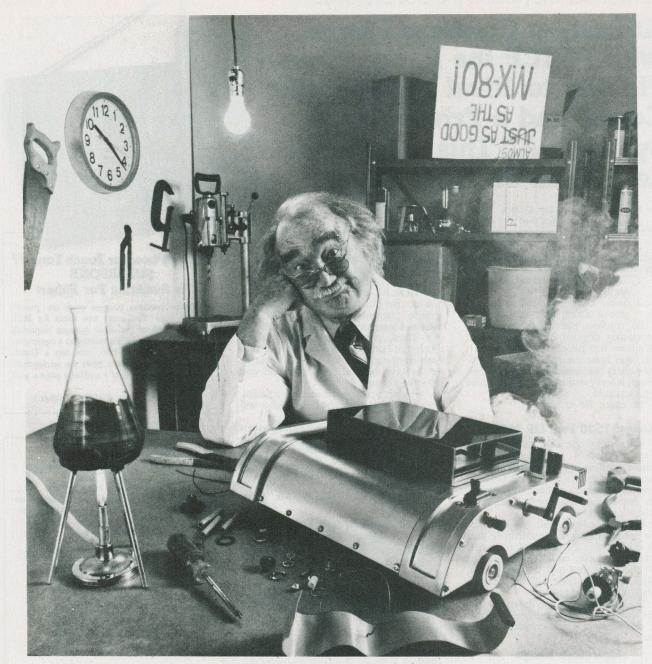

For everyone who's tried to top the MX-80, bad news. We just did.

Epson.

The Epson MX-80 is the best-selling dot matrix impact printer in the world. It has been since its introduction. And despite the host of imitators it spawned, no one has been able to top it. Until now.

FX-80: Son of a legend.

The new Epson FX-80 is far more than just doo-dads added on to last year's model. It's the most astonishing collection of features ever assembled in a personal printer.

For starters, it's fast: 160 CPS. And clean. All the print quality Epson is famous for in a

tack-sharp 9x9 matrix.

But that hardly scratches the surface.

Create your own alphabet.

With the new FX-80, you aren't limited to ASCII characters. You can create your own. Any character or symbol that can be defined in a 9x11 matrix can be added to the FX-80's already impressive library of type styles and stored in its integral 2K RAM.

So you can create "Sally's Gothic" or "Tom's Roman" just by downloading and modifying standard characters. Or you can create a custom set from scratch. Either way, you can store up to 256 new characters. And if you don't need a new alphabet, the RAM functions as a 2K data input buffer.

Who knows graphics better than Epson? Nobody, that's who. And if you don't believe it, witness the FX-80.

With a 12K ROM capacity, the FX-80 gives you a few things the others don't. For example, not one, not two, but *seven* different dot addressable graphic modes are program

selectable. And can be mixed in the same print line. Everything from 72 DPI (dotsper-inch) Plotter Graphics to the 640 dots per line resolution designed to match the remarkable monitor clarity of the Epson QX-10 personal computer.

And *that* is in addition to an astonishing array of 136 different user-selectable type styles including Proportional, Elite and Italic as well as the more conventional faces you get on other printers.

#### Hard-to-beat hardware.

The FX-80 has all the hardware features you've come to know and love on the MX Series: logic seeking, bidirectional printing, the by-now-famous disposable printhead, and more.

The FX-80 features an adjustable pin platen or optional friction/tractor feed, so you can use fanfold, roll or sheet paper ... backwards or forwards. The FX-80 even gives you reverse paper feed.

And if you're printing forms, the FX-80 has a feature you're gonna love: a function that allows you to tear off the paper within one inch of the last print position.

Be the first on your block.

We'd be willing to bet that the FX-80 — like the MX-80 — will have its share of imitators. Don't be fooled. To make sure you get the genuine article, rush down to your local computer store right now and let them show you everything the FX-80 can do.

And while you're there ... ask them to show you how it works with our computers.


The New Epson FX-80. See it at your dealer now.




EPSON AMERICA, INC.
COMPUTER PRODUCTS DIVISION

3415 Kashiwa Street Torrance, California 90505 (213) 539-9140. Outside California, phone (800) 421-5426 for the Epson dealer nearest you.

Circle No. 25 on Free Information Card

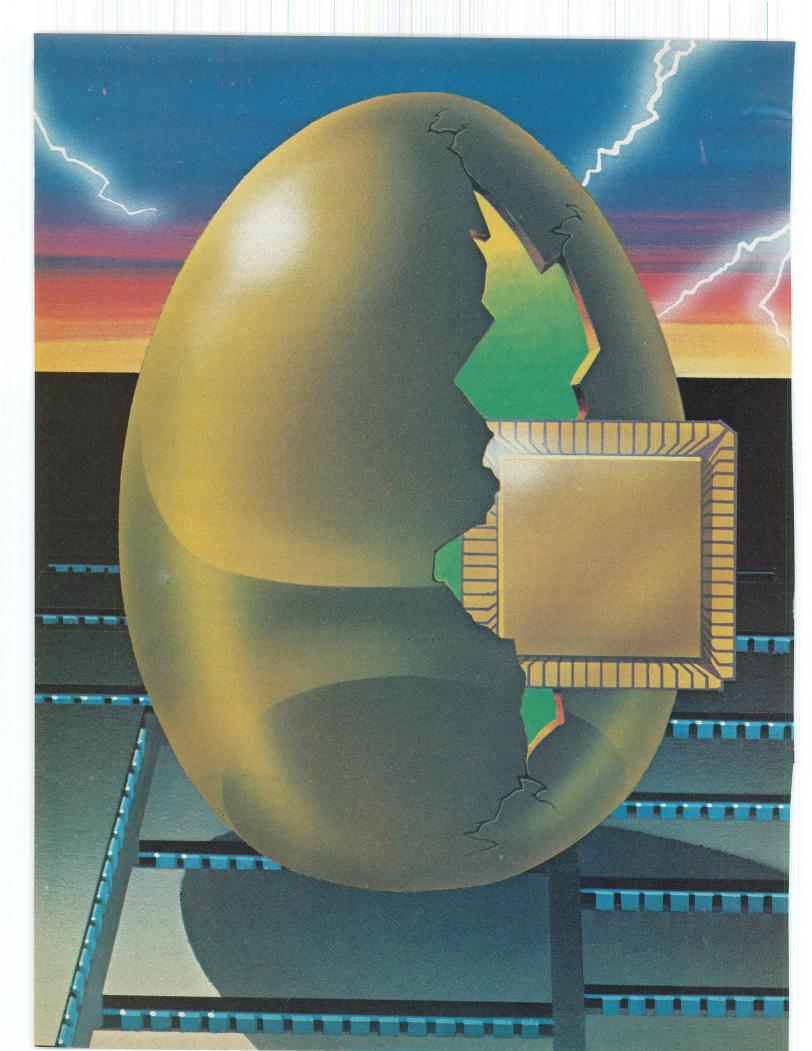

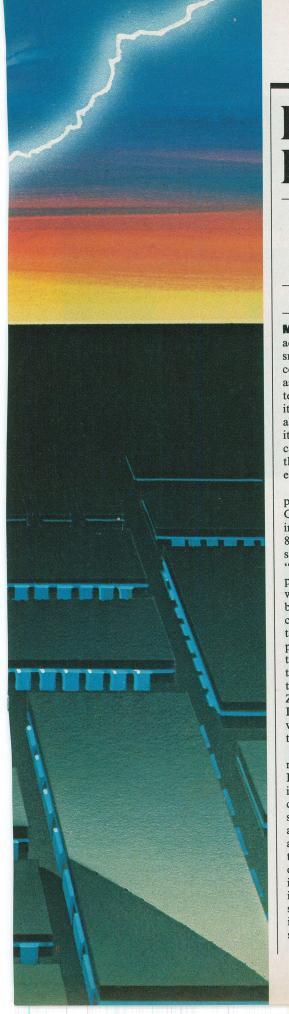

### A Super Chip-FOR NEXT-GENERATION PERSONAL COMPUTERS

Intel's 68-pin iAPX-188 combines an enhanced 8088 16-bit CPU and up to 20 support ICs in a single package for double the performance and much lower device and assembly costs

#### By Tony Zingale

MICROPROCESSORS represent a great advance in electronics owing to their small size, programmability, and low cost. Developing them is as much an art as it is a science since considerations extend beyond performance and reliability. Production cost, peripheral availability and cost, and software availability are important factors, too. The sum can determine the success of the CPU in the marketplace—how many computers will be designed around it.

Since the introduction of the microprocessor in the mid-1970s with Intel Corporation's 16-pin 4004 CPU, leading to the 40-pin bug-like package of the 8080 CPU and others, there has been a swift evolution in the design of these "computers on a chip." Zilog, for example, quickly followed with its Z80 CPU, which is much like an 8080 that combines a clock generator and a systems controller into one IC instead of having three separate devices. Other microprocessor makers followed suit with their designs, each playing "can you top this" with new products. This lead to the development of 16-bit CPUs-Zilog's Z-8000, Motorola's 68000, and Intel's 8088, among them. Their larger word size makes them more powerful than the 8-bit CPUs.

The beat goes on with the announcement of a next-generation CPU in Intel's advanced processor family—the iAPX 188. It shows great promise in becoming a very popular nucleus for personal and small-business computers for a host of reasons. With a square shape and 68-pin package, it's apparent that this is a different type of CPU than the ordinary one. Actually, the single chip incorporates a number of ICs, combining up to 20 equivalent chips that constitute essential microprocessor building blocks that are ordinarily separate support chips.

The CPU partition itself is really an

enhanced 8088 microprocessor, the same one used in the IBM-PC and similar machines. Although the two chips are object-code compatible, 10 more instructions have been added. The logic within the iAPX 188 is shown in Fig. 1.

Physically, the iAPX 188 is not compatible with the 8088 since its JEDEC Type A, 68-pin, leadless package has 17 pins on each of its four sides, as shown in Fig. 2. It does directly address 1 megabyte of memory, is compatible with 8282/83/86/87, 8288 and 8289 bus support components, and requires a single 5-volt power supply.

Since the data path is only 8 bits wide, there is a saving in parts, and a reduction of board space of about 1/3 can be realized over a 16-bit approach. Direct peripheral interfacing is also easier since most reasonably priced peripherals handle data 8-bits at a time. With an 8-bit system requiring eight 64K-bit memory chips for each 64K-byte block, this is cheaper than going to 16-bit wide memory. Since the iAPX 188 (80188 is the part number) combines high-performance 16-bit internal architecture with an 8-bit bus interface, this allows 20megabyte addressing and 64K-bytes of I/O addressability, which is becoming a "standard" in modern microcomputers. In performance, the 80188 can provide up to 65% to 95% of the performance of its 16-bit relatives while retaining the interface advantages of the 8-bit data bus.

Besides the CPU, several functions have been integrated on the 80188. One of these is the clock generator that provides an 8-MHz system clock. Other functions include two 16-bit programmable timer/counters for implementing baud-rate generation, real-time clocks, and delay counters, with a third counter (not externally connected) used to implement time delays and which can be used as a prescaler.

Also included are two high-speed, in-

#### ...SUPER CHIP


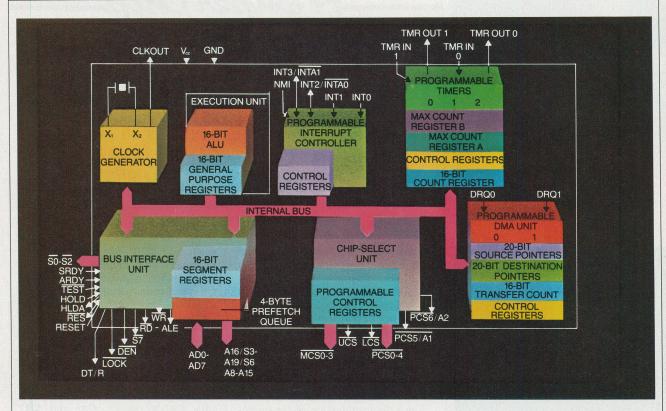


Fig. 1. Block diagram of the various parts of the iAPX 188.

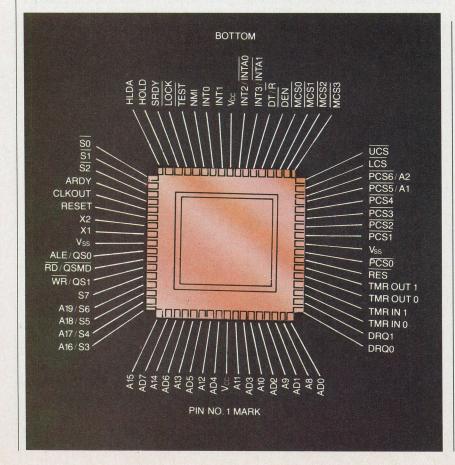

dependently programmable DMA channels to provide data transfers between system memory and I/O devices. DMA transfers can occur between memory and I/O or within the same space (M-M, or I/O-I/O). Each DMA channel maintains two 20-bit source and destination pointers that can be incremented, decremented, or left unchanged after each transfer. Data transfers occur a byte at a time, and can be anywhere within the 1-megabyte addressable memory space. This allows a maximum transfer rate of 1 Mb/s. The user can specify several different modes of operation via the on-chip DMA channel control word.

A multi-level programmable interrupt controller that can resolve priority among up to five external interrupts plus interrupts from the five internal sources (timer, DMA, etc.) is also provided in the chip. Each interrupt has a programmable priority level and a preassigned interrupt vector type used to derive an address to a table in memory where the interrupt service routines are stored. This enhancement makes the iAPX 188 interrupt response time about 50% faster than the 8088. Multiple

Fig. 2. The 68-pin, leadless package has 17 pins on each side.

8259A's can be cascaded to provide up to 128 external interrupts.


Integrated programmable memory and peripheral chip-selects, plus a programmable ready generator, replace many of the conventional TTL devices required to interface system memory and I/O devices to the CPU. The waitstate generator is necessary so that the CPU can interface to memory and I/O devices of varying speeds. The result of the integrated logic eliminates external propagation delays, thus speeding up the data flow. Three memory ranges (lower, middle, upper) can be programmed to variable lengths (1K, 2K, 4K, ... 256K) so that a variety of memory chip sizes can be used. Also, anywhere from zero to three wait states can be programmed so either high-speed or low-cost and slower memories can be


The added functionality of the 80188 (i.e., timers, DMA, interrupt controller, chip selects), uses on-chip 16-bit registers for each integrated device contained in a 256-byte control block. This logic is shown in Fig. 3. The control register block may be I/O or memory mapped based on initialization for a new control block pointer in the CPU. Except for these additions, the register architecture of the 80188 is identical to the 8086/8088.


A local bus controller provides the required address, data, and control signals to the local system bus. The pipelined architecture of the 80188 allows savings in memory cost since instructions are prefetched into a 4-byte execution queue, high performance can be maintained while using slower (thus less expensive) memory. Other cost savings come from the use of an 8-bit rather than a 16-bit external data bus. A typical iAPX 188 computer is shown in Fig. 4.

Since the iAPX 188 is software compatible with the 8086 and 8088 CPU's, compilers, operating systems, and application programs written for the 8086/8088 will run on systems using the new CPU. Current operating systems include Intel's iRMX 86/88; Digital Research's CP/M-86, and CP/NET; and Microsoft's MS-DOS and Xenix (a Unix implementation). All popular programming languages are available, including BASIC, Fortran, Pascal, Cobol,

Fig. 3. Block diagrams of the DMA control logic (top), three timer circuits (center), and interrupt controller (bottom). On-chip 16-bit registers are used for each integrated device.

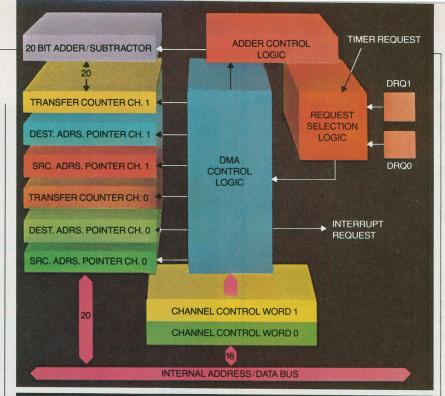

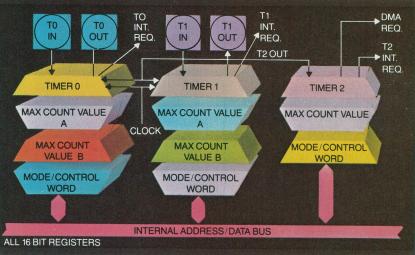

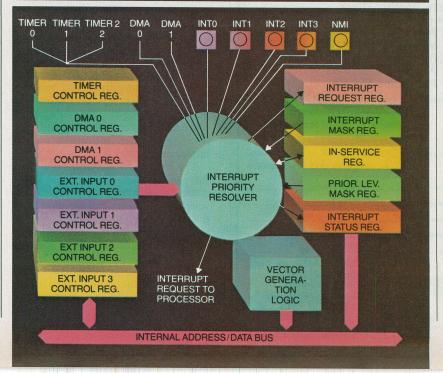

#### • Sundex

#### FOR PAYING BILLS...

This could be the last check you write



Because it lets you try Sundex's Personal Payables<sup>TM</sup> program, designed to take over tedious bill paying chores.

#### Personal Payables:"

- writes checks—standard or continuous form
- alerts you to payments coming due
- stores amounts payable for regular payments
- keeps continuous, accurate balance
- handles up to 10 checking accounts

And We've Taken the Fear Out of Trying...our easy-English manual and on-screen instructions make it easy for anyone in the family to do it.

Start now to write off writing checks! To Try It—send \$19.95 for full use of program (limited to writing 8 checks). When you're ready to buy it, call us toll free for the access code and we'll bill you for the balance (\$80.00). To Buy It NOW—send \$99.95 and never write another check

of your limited of the limited of t	I want to take advantage our TRIAL OFFER—\$19.95 convinced, send me your onal Payables™ pram—\$99.95	
Specify:	□IBM 128K □IBM 64K	
	□COMPAQ □Osborne	
	□ Apple II □ TI Professional	
	☐ Apple IIe	
Payment	: □Check □VISA □MasterCard	
	Colo. residents add 3% sales tax	
Card #	€xp. Date	
Signature		
Name		
Address		
City	State Zip	
	Mail to: Sundex Software Corp.	
· Su	Index Soulder, CO 80301	
Phone orders: 1-800-835-3243 In Colorado call: 1-303-440-3600		

#### .. SUPER CHIP

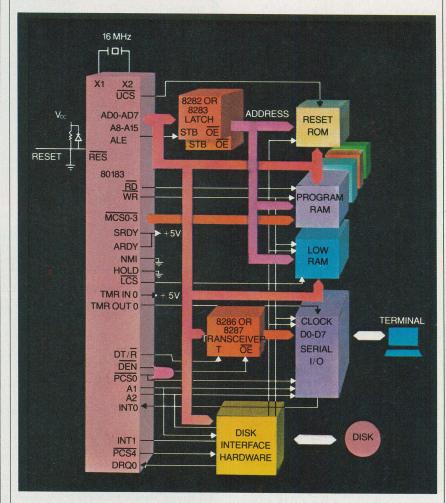


Fig. 4. Block diagram of a typical way in which the 80188 (iAPX 188) could be used in a computer.

PL/M, and C. And applications programs that can run on computers based on the iAPX 188 already abound.

As previously mentioned, new instruction types have been implemented on the new CPU. These include a block move, push or pop all registers, rotate/shift immediate, and multiply immediate. These new instructions not only increase the raw computing speed of the CPU, but they also apply to highlevel languages and multitasking implementations.

The iAPX 188 delivers about twice the performance of the 5-MHz 8086/8088. This is attributed to some hardware enhancements. For instance, effective address (EA) calculation typically involving the addition of a segment register plus a displacement and some index value to a given segment is performed by an on-chip microcode sequence in the 8086/8088. In the 80188, this calculation is performed by a dedicated hardware adder in the Bus

Interface Unit (BIU) of the CPU. Additionally, the 80188 executes many instructions in fewer clocks than the 8086/8088.

The use of the 8087 Numeric Processor Extension allows operations such as arithmetic, trigonometric, exponential, and logarithmic instructions to show an increase in speed of some two orders of magnitude. Other chips, such as the 82720 GDC, 82730 Text Coprocessor, and the 82586 Ethernet Controller are also compatible with the iAPX 188.

In sum, the iAPX 188 represents another evolutionary step forward in microprocessors. Its performance is said to double that of its 8088 cousin, while cost is half as much. Moreover, software compatibility with the 8088 is maintained. You can expect to see computers incorporating this chip in the very near future. The next move is up to competitive processor makers, who will likely follow with their new-generation CPUs.



### Commodore - 64 Word Processors



#### SCRIPT 64 EXECUTIVE WORD PROCESSOR

Rated best by COMMODORE. This is the finest word processor available. Features include line and paragraph insertion/deletion, indentation, right and left justification, titles, page numbering, characters per inch, etc. All features are easy to use and understand. With tabs, etc. SCRIPT-64 even includes a dictionary/spelling checker to make sure your spelling is correct. The dictionary is user customizable to any technical words you may use. Furthermore, all paragraphs can be printed in any order so doctors, lawyers, real estate agents, and homeowners will find contract writing and everyday letters a snap. To top things off, there is a 100 page manual and help screens to make learning how to use SCRIPT-64 a snap. This word processor is so complete we can't think of anything it doesn't have. When combined with the complete database you have a powerful mailmerge and label program that lets you customize any mailing list with personalized letters. List \$99.95. Sale \$79.00. (plus postage) Disk Only.

#### COMPLETE DATA BASE

This is a user friendly database that makes any information easy to store and retrieve. The user defines the fields and then can add change, delete and search for any category he wants. When combined with the SCRIPT-64 Executive Word Processor you can search out any category (zip codes, hair color, etc.) and print super personalized letters. List \$89.00. Sale \$69.00. (plus postage) Disk Only.

#### TOTAL WORD PROCESSOR PLUS 5.2

This top quality word processor was specially designed for PROTECTO ENTERPRIZES. Features include line and paragraph insert and delete, right and left justification, multiple copies, and line spacing. Extra functions include mailmerge, embedded footnotes, extra user defined character sets, plus a complete label program. List \$69.90. Sale \$56.00. (plus postage) Disk add \$7.00.

#### QUICK BROWN FOX WORD PROCESSOR

(Cartridge). Nationally advertised all purpose word processor that uses menu control to let you manipulate your text. (includes the features most often asked for including right and left justification, wordwrap, and more. List \$69.00. Sale \$59.00. (plus postage).

• LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
• BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • OVER 500 PROGRAMS • FREE CATALOGS

WE SHIP C.O.D. HONOR VISA AND MASTER CHARGE ADD \$3.00 SHIPPING FOR C.O.D. ADD \$2.00 MORE SPECIAL SERVICES:

One Day — Express Mail add \$10.00


PROTECTO

ENTERPRIZES (WE LOVE OUR CUSTOMERS)

BOX 550, BARRINGTON, ILLINOIS 60010 Phone 312/382-5244 to order

Circle No. 40 on Free Information Card

# Learning electronics is no picnic.

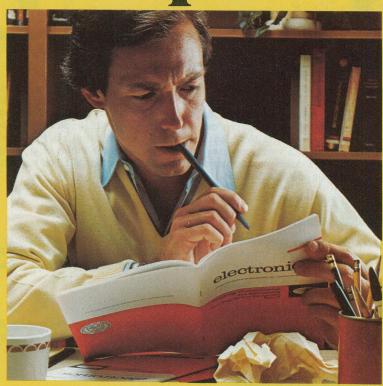

At any level it takes work and a few sacrifices. But with CIE, it's worth it.

Whoever said, "The best things in life are free," was writing a song, not living a life. Life is not just a bowl of cherries, and we all know it.

You fight for what you get. You get what you fight for. If you want a thorough, practical, working knowledge of electronics, come to CIE.

You can learn electronics at home by spending just 12 hard-working hours a week, two hours a day. Or, would you rather go bowling? Your success is up to you.

At CIE, you earn your diploma. It is not handed to you simply for putting in hours. But the hours you do put in will be on your schedule, not ours. You don't have to go to a classroom. The classroom comes to you.

#### Why electronics training?

Today the world depends on technology. And the "brain" of technology is electronics. Every year, companies the world over are finding new ways to apply the wonders of electronics to control and program manufacturing, processing...even to create new leisure-time products and services. And the more electronics applications there are, the greater the need will be for trained technicians to keep sophisticated equipment finely tuned and operating efficiently. That means career opportunities in the eighties and beyond.

Which CIE training fits you?

Beginner? Intermediate? Advanced? CIE home study courses are designed for ambitious people at all entry levels. People who may have:

- 1. No previous electronics knowledge, but do have an interest in it;
- 2. Some basic knowledge or experience in electronics:
- 3. In-depth working experience or prior training in electronics.

You can start where you fit and fit where you start, then go on from there to your Diploma, FCC License and career.

#### Many people can be taught electronics.

There is no mystery to learning electronics. At CIE you simply start with what you know and build on it to develop the knowledge and techniques that make you a specialist. Thousands of CIE graduates have learned to master the simple principles of electronics and operate or maintain even the most sophisticated electronics equipment.

#### CIE specializes exclusively in electronics.

Why CIE? CIE is the largest independent home study school that specializes exclusively in electronics. Nothing else. CIE has the electronics course that's right for you.

Learning electronics is a lot more than memorizing a laundry list of

facts about circuits and transistors. Electronics is interesting! It is based on recent developments in the industry. It's built on ideas. So, look for a program that starts with ideas and builds on them. Look to CIE.

Programmed learning.

That's exactly what happens with CIE's Auto-Programmed® Lessons. Each lesson uses famous "programmed learning" methods to teach you important principles. You explore them, master them completely, before you start to apply them. You thoroughly understand each step before you go on to the next. You learn at your own pace.

And, beyond theory, some courses come fully equipped with electronics gear (the things you see in technical magazines) to actually let you perform hundreds of checking, testing, and analyzing projects.

#### **Experienced specialists work** closely with you.

Even though you study at home, you are not alone! Each time you return a completed lesson, you can be sure it will be reviewed, graded and returned with appropriate instructional help. When you need additional individual help, you get it fast and in writing from the faculty technical specialist best qualified to

answer your question in terms you can understand.

#### CIE prepares you for your FCC License.

For some jobs in electronics, you must have a Federal Communications Commission (FCC) License. For others, some employers tend to consider your license a mark in your favor. Either way, your license is government-certified proof of your knowledge and skills. It sets you apart from the crowd.

More than half of CIE's courses prepare you to pass the governmentadministered exam. In continuing surveys, nearly 4 out of 5 graduates who take the exam get their licenses! You can be among the winners.

#### **Associate Degree**

Now, CIE offers an Associate in Applied Science Degree in Electronics Engineering Technology. In fact, all or most of every CIE Career Course is directly creditable towards the Associate Degree.

#### Today is the day. Send now.

Fill in and return the postage-free card attached. If some other ambitious person has removed it, cut out and mail the coupon. You'll get a FREE school catalog plus complete information on independent home study. For your convenience, we'll try to have a CIE representative contact you to answer any questions you may have.

Mail the card or the coupon or write CIE (mentioning name and date of this magazine) at: 1776 East 17th




Pattern shown on oscilloscope screen is simulated.

#### Cleveland Institute of Electronics, Inc. 1776 East 17th Street, Cleveland, Ohio 44114

PE 92

CIE school catalog	t to learn from the specialists in electronics—CIE. S., including details about the Associate Degree prophome study information.	
Address		Apt
City		
State	Zip_	
Age	Phone (area code)	
Check box for G.I	. Bill bulletin on Educational Benefits:   Veteran	☐ Active Du

MAIL TODAY!

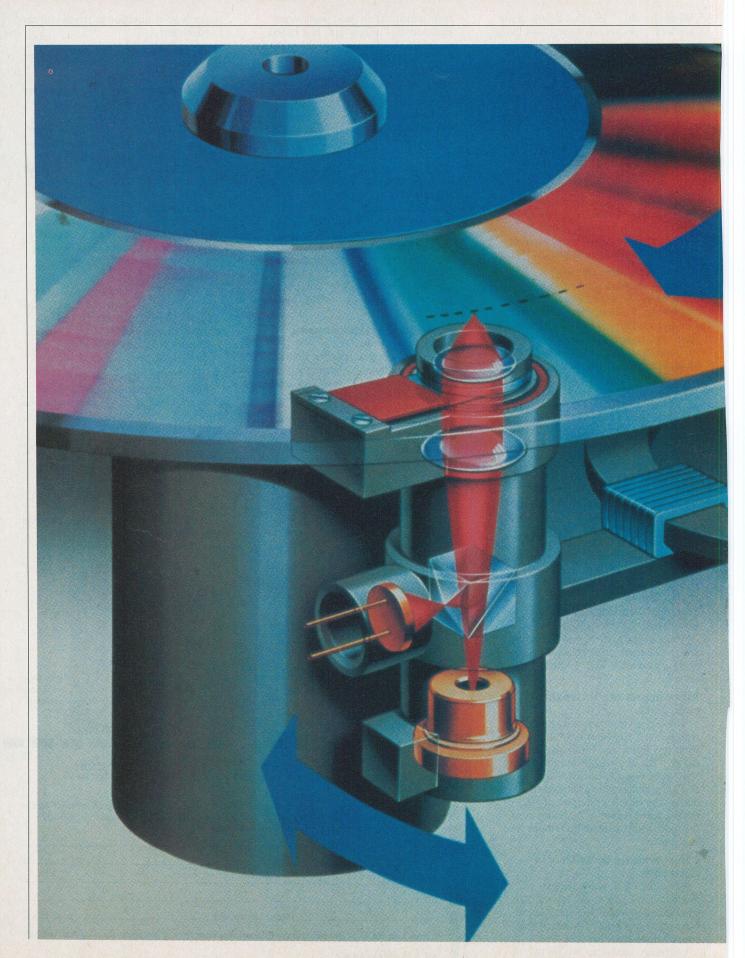



## COMPACT DISC DIGITAL AUDIO SYSTEMS

How the new digital audio 4.7-inch playback record system works

By David Ranada

COMPACT Disc players—the hottest new products to appear on the audio scene in quite some time—are probably the most complex and sophisticated electronic devices for the home ever offered to the consumer. They are designed to play back, with extraordinarily high audio fidelity, up to 75 minutes of music recorded on mirror-finish 12-centimeter (4.7") acrylic discs. The system does not wear out or damage the discs while it is playing them since only a light beam contacts the disc to read it out; that light comes from a semiconductor laser.

CD players combine aspects of a home computer's disc drives (in the player's disc-drive and laser-tracking servos), a specially programmed microprocessor (to handle a player's control functions), a digital signal processor (to decode and correct the digital-audio bit stream), and a high-quality, high-precision digital-to-analog conversion system (to change the digital audio data into normal audio signals of high sonic quality). How do all these systems interact to make a CD player work?

Digital Audio Basics. A digital-audio recording/playback system converts a smoothly changing, analog waveform into a series of binary numbers describing the waveform, records those numbers as pulses on a suitable medium (magnetic tape or the master disc for Compact Disc pressings), plays back those pulses, converts them into numbers, and finally reconverts the numbers into a smoothly varying analog waveform (Fig. 1). How can such a system provide the high audio quality claimed by advocates of digital audio? After all, typical Compact Disc player specifications claim a dynamic range of more than 90 dB, flat (±0.2 dB) frequency response to 20,000 Hz, distortion of less than 0.01%, and no wow or flutter.

The answer lies in the way the two basic operations of digital audio are performed. The first operation is called sampling. If the amplitude of a waveform—any waveform—is somehow captured or frozen at regular,

closely spaced intervals, the waveform is said to be sampled. The waveform in Fig. 1A gets sampled in Fig. 1B, the samples being the points at the ends of the vertical lines. Mathematical models of this activity say that as long as samples are made at least twice as frequently as the highest frequency contained in the signal being sampled, no information is lost. From the information contained in the samples the waveform can be exactly reconstructed, as long as the waveform did not contain any frequencies greater than the sampling rate. The Compact Disc system's designers wanted it to have a frequency response extending to 20,000 Hz, so the audio signal for Compact Disc master tapes is sampled 44,100 times per second. The sampling rate is 44.1 kHz, more than twice the highest frequency desired by a slight margin.

Quantization—the second basic operation of digital audio—is shown in Fig. 1B and 1C. It is simply the *measurement* of the amplitude of the samples, the results of which are shown here in arbitrary numerical units in both decimal and binary representation. Binary representation is used by analog-to-digital converter (ADC) circuits in digital-audio equipment.

Note that the measurements are not infinitely precise; there is some "rounding off" to the closest integer value. Making an infinitely precise measurement would generate a number with an infinite number of digits (or bits); there has to be a practical limit imposed to the resolution of the measurement. This limitation creates noise and distortion in the reproduced signal, but the noise and distortion can be reduced to any level by increasing resolution of the ADCs.

In the Compact Disc system, audio is encoded with 16 bits of resolution, meaning that the ADCs used in Compact Disc mastering can distinguish changes in voltage levels of 1 in 2<sup>16</sup>. This translates to 1 in 65,536 or the equivalent of 1" in about 1 mile. With this degree of resolution, the signal-to-noise ratio or dynamic range of the CD system can be greater than 90 dB, the theo-

#### .CD DIGITAL AUDIO

retical limit being a little better than 97 dB. Since quantization error is also responsible for nearly all the distortion in the digital audio process, it too is reduced to very low levels with 16-bit encoding.


The digital numbers from the ADC are converted into a pulse train (Fig. 1D) for recording on tape or on a Compact Disc master. Since it has only two possible values (high and low, corresponding to 1 and 0), this waveform is far more immune to distortion and noise in the recording and playback process than the original analog waveform. Distortions that can and do occur in the data-storage media (tape or optical disc) only rarely change the recorded pulse train enough to confuse the decoding circuitry as to whether a high or low value was intended.

In playback—this is where a CD player comes in—the original pulse waveform is recovered from the recorded waveform (Fig. 1E). After it is converted into the original numerical sequence (Fig. 1F) the series of digits is fed into a digital-to-analog converter (DAC) which changes them into discrete voltage levels (Fig. 1G). Because the numbers are clocked into the DAC at the same rate as they were generated at the ADC during the recording process, variations in the speed of the playback medium do not affect the reproduced waveform. Therefore, wow and flutter are eliminated!

An output-smoothing circuit removes the inaudible ultrasonic components that give the staircase waveform it's disjointed character. The filtered waveform makes up the output of the digital audio system, an output that is a very high-fidelity replica of the original input signal.

The Compact Disc and Player. Before exploring some of the processing that goes on inside a Compact Disc player let's take a look at what a CD player has to play, the Compact Disc itself. Audio information is recorded on a CD pressing in a track of microscopic "pits" on the surface of a transparent acrylic disc 12 centimeters in diameter, as shown in an accompanying photo. These pits average slightly less than 1 micrometer in length; each revolution of the track is 1.6 micrometers away from the next. Data is contained in the length and spacing of the pits and the spaces ("lands") between them.

A cross-section of a CD pressing is shown in Fig. 2A. In it you can see that, though the pits (P) are made as indentations, they appear as "bumps" to the

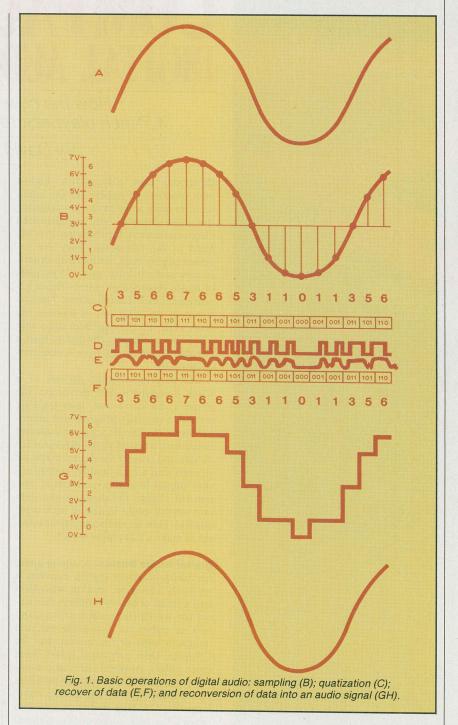

scanning laser beam. It comes up through the bottom of the disc, hits the aluminized signal surface (AL), and is reflected out again. Changes in the intensity of reflected light are detected (Fig. 2B) and converted to a digital bit stream (Fig. 2C). The pits are protected on one side by the bulk of the disc's plastic substrate (S), and on the other by a tough lacquer coating and a label (PR).

A typical mechanical arrangement of a Compact Disc player is shown in Fig.

3 and the illustration on page 40. It consists of an optical scanner, containing a semiconducter laser and a photodiode, mounted on a tracking device that allows the scanner to move across the face of the spinning disc. The disc spins counterclockwise in relation to the laser beam and the track of pits starts toward the center of the disc and moves toward the outside edge, both movements being opposite to those with analog (black-disc) records. The speed of rotation

## Compare Radio Shack's TRS-80° Model 4 With IBM° and Apple°



### Model 4 Wins! And You Save Up to \$1014

Description	Radio Shack Model 4	IBM PC	Apple IIe
Two-Drive Unit	\$1999	\$1864	\$1995
Formatted Disk Capacity	174Kb each (TRSDOS)	180Kb (DOS 2.0) 160Kb (DOS 1.0)	124Kb (DOS 3.3)
80-Column	Included	Included	Included
Monitor	Included	\$345	Included
Monitor Adapter	Not Required	\$335	Not Required
First Drive	Included	Included	Included
Second Drive	Included	\$289	\$395
Parallel Printer Interface	Included	Included	\$165
Serial Interface	Included	\$120	\$195
Reference Books	Included	Included	\$50
Numeric Pad	Included	Included	\$159.95
Diskette Operating System	Included	\$60	Included
Total	\$1999*	\$3013	\$2959.95

TRS-80 Model 4 Is the Logical Choice. For performance and price, our Model 4 desktop computer is the professional approach to improving your productivity. It has features built-in that cost extra in other computers—features that will make your job a lot easier.

Designed to Make Hard Work Easy. The easy-to-read 80-character by 24-line display and 64,000-character memory make Model 4 perfect for complex spreadsheet analysis. To speed operations, our "MemDisk" emulates a super-fast disk drive in memory for keystroke-quick responses instead of time-consuming disk access. A built-in print spooler lets you work on one job while printing another.

**Versatile and Powerful.** We designed Model 4 to be completely compatible with our existing line of word processing, time management, electronic filing—in fact, *all* TRS-80 Model III software. And soon you'll be able to choose from thousands of CP/M®-based programs.

See It Today. Get a demonstration of the TRS-80 Model 4 (Cat. No. 26-1069) at your nearest Radio Shack Computer Center, store or participating dealer. Be sure to ask about our leasing, training and service plans, too.

## Radio Shaek

The biggest name in little computers®
A DIVISION OF TANDY CORPORATION

\*Price applies at participating Radio Shack stores and dealers. IBM is a registered trademark of International Business Machines Corp. Apple is a registered trademark of Apple Computers. CPIM is a registered trademark of Digital Research, Inc. Prices based on manufacturer's literature.

☐ Send me a free TRS-80 Model 4 brochur			
Mail To: Radio Shac 300 One Tai	Mail To: Radio Shack, Dept. 84-A-49 300 One Tandy Center, Fort Worth, Texas 76102		
NAME			
COMPANY			
ADDRESS			
CITY	STATE ZIP		
TELEPHONE			

#### ...CD DIGITAL AUDIO

slows down between the start of a disc and its finish.

It starts out spinning at around 500 rpm and ends up spinning at about 200 rpm if the program extends close to the edge of the record. The speed is controlled by servo networks so that the track is always passing over the laser at between 1.2 and 1.4 meters per second. The steady decrease in rotation speed increases the amount of information that can be held on the disc. If the rotation rate were constant, the pits and alternating lands near the start of the disc would be unnecessarily large.

Data on Disc. It would be a stupendous and misleading oversimplification to say that digital-audio data gets recorded on a Compact Disc exactly as it emerged from the digital-audio master recorder. There is a good deal of digital signal manipulation on the audio data before it finds itself on the signal-surface of a Compact Disc. Most of this processing is undone by a CD player in its operations to recover the original digital-audio. Then why is all the processing necessary? The three main reasons are: to increase the playing time of a CD, to make it audibly immune to disc damage (scratches, fingerprints, small pressing defects), and to provide special digital control and data signals for advanced Compact Disc applications.

Figure 4, as complicated as it appears at first glance, summarizes all the main digital operations performed to a digital-audio signal on its way to the master Compact Disc. The digital data on a CD is gathered into units called frames and the diagram depicts the encoding process for one frame (which takes only about 136 microseconds to be scanned by a CD player's laser).

The digital-audio signal content of a CD frame consists of enough information to make up six sampling periods (Fig. 4A). Since there are 32 bits generated in one sampling period (16 bits per stereo audio channel every 22.68 microseconds) there are  $32 \times 6 = 192$  audiodata bits per frame (Fig. 4B). Each 16bit sample is broken down the middle into two 8-bit bytes, called symbols in CD terminology (Fig. 4C). One symbol contains the 8 most significant bits of the sample, the other contains the 8 least significant bits. This repartitioning of the data yields 24 symbols containing only digital-audio data per frame.

The first major signal-processing operation on the audio data during the encoding process is depicted in Fig. 4D and E. These two lines depict the functions that make the data stream immune to transmission errors due to disc defects or damage.

They start with the generation of redundant data that a CD player will use





Fig. 2. A 1.2-mm thick Compact Disc (A) consists of three layers: an acrylic substrate (S), an aluminized reflecting "signal surface" (AL), and a lacquer coating and label (PR). The pits (P) are pressed from above but the laser beam scans from below. The reflected intensity of the beam varies as the pits pass by (B) and these variations hold the digital-audio data (C).

to detect and correct for any errors in the data stream as read by its laser (see box on page 45). Simply put, the redundant data is a mathematical summary of the digital-audio data contained in the frame and is a special form of parity-check code (for those of you familiar with digital data transmission). The first error-correction symbols to be generated are the four Q symbols which find their places in the middle of the frame.

Next comes interleaving, a process for making the recorded signal immune to disc scratches and other relatively large-scale defects (see accompanying box). Interleaving scrambles the symbols from a large number of frames preceding and following the one being encoded in the diagram. This scrambling (depicted by the arrows between Fig. 4D and E) is performed in a very strictly defined way, which moves originally consecutive symbols to distantly separated frames, and which moves symbols from distant frames into the one under construction. The Q-parity symbols also undergo this shuffling process. No data is left out or repeated—the number of digital-audio symbols per frame is still 24, the number of Q-parity symbols is still 4—its just that 28 previously consecutive symbols find themselves strewn over about 40 different frames in a very regular, and undoable pattern.

After interleaving, four P-parity error-detection/correction symbols are calculated from the 24 audio and 4 Q-parity symbols now in the frame. This additional parity data is tacked onto the end of the frame. The whole parity/interleaving scheme is called CIRC (Cross-Interleave Reed-Solomon Code).

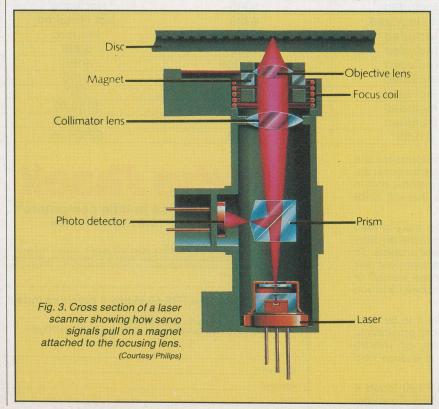

To the start of the frame is added one 8-bit symbol containing control and display (C&D) bits. At present this symbol is used only to hold data about the timings of each musical selection on a Compact Disc, and data signalling where each selection begins and ends. This information is used by a CD player to cue up individual selections.

Future applications of the C&D symbol include text data for lyrics; graphics data for computer-type displays on TV's and monitors; and ultimately video data in conjunction with a video frame-store system. The C&D symbol can also be made to carry a telephone-quality digitally encoded voice signal

for sing- or play-along recordings. (Since the C&D symbols contain 8 bits and occur 7,350 times per second—once per frame—a voice signal with a signal-to-noise ratio of about 45 dB and a frequency range up to about 3,500 Hz can be carried.)

Players for all these advanced functions have not yet been issued. In fact, some or the most technically complex options, like computer graphics and video, are still in the planning stages.

**Modulations.** At this stage (Fig. 4E), the frame consists of 33 8-bit symbols of digital-audio (24 symbols), parity-check (8 symbols), and control/display data (1

symbol). This symbol sequence is then fed into a digital modulation circuit which converts, via a read-only-memory look-up table, each 8-bit symbol into a 14-bit word in a process called EFM (Eight-to-Fourteen Modulation). Essentially the 8-bit symbols modulate a bit pattern 14 bits wide (Fig. 4F and G). Why is this done?

The full answer to that question is rather complex, but it boils down to the fact that about 25 per cent *more* information can be stored on a Compact Disc if the 8-bit symbols are converted to 14-bit words with certain special properties. To the CD user this increase of "information density" means longer

#### **ERROR CORRECTION**

Analog stylus-in-a-groove recordings are very susceptible to all sorts of sonic degradations from defects in the manufacturing process or damage inflicted by the user. What record buyer hasn't had the unpleasant experience of a bad pressing or hasn't heard the noise added by fingerprints or scratches on an analog disc's surface. Digital audio offers salvation from these problems since specially encoded digital signals can be made immune to what are called "transmission errors." By the incorporation in the pit/land track on a CD of extra information which is mathematically redundant to the original digitalaudio signal, a Compact Disc player can eliminate to a substantial degree the sonic side effects of even gross disc damage like scratches and fingerprints.

The theory of error-correction coding can get extremely involved, mathematically speaking, but the basic principles of how error correction is applied in the CD system can be illustrated by a simple analogy. Figure A illustrates what is called a magic square. As you might recall from gradeschool arithmetic, a magic square is an array of numbers, the rows, columns, and diagonals of which all add up to the same number. In this case each row, column, or diagonal adds up to 15. If you were to transmit the numbers contained in the magic square along with the sum of any row or column, and if one of the numbers were to be incorrectly received, you would still be able to regenerate the magic square completely and exactly. Why? Because you know that each row or column or diagonal adds up to 15. If an incorrect number is received as in Fig. B, the rows, columns, and diagonals will not add up correctly. The offending number can be easily located and corrected. The location is at the intersection of the row and column which do not add up correctly; the correct value is that number which makes the sum come out correctly.

By transmitting the sum value along with the numbers in the magic square you were

transmitting redundant information, a mathematical summary of the numbers contained in the square. The receiver is able, using this redundant information, to calculate and correct more than one transmission error even if one of the errors occurs with the sum value. Of course, correcting the sum value isn't helpful if all you are interested in is the magic square's numbers, but at least that this example shows that the transmission of redundant information makes the detection and correction of transmission errors much easier.

The Compact Disc system makes use of a similar, but much more complex, process to protect the digital-audio data from transmission errors. About 25 per cent of all the data encoded on a Compact Disc is mathematically redundant to the digital-audio information. These error-correction symbols are derived by binary computation in much the same way the sums for the magic square's rows and columns were obtained. Naturally the numerical data on a CD is not placed in magic squaresdigitally encoded music doesn't create sequences of numbers that are easily fitted into magic squares. Instead, the CD encoding system creates unique patterns of bits which are hard to confuse with one another without being able to find and correct for errors.

No error correction system is perfect, however. Eventually enough errors can occur that exact reconstruction of the transmitted signal is impossible. In the magic square example, for instance, if four or more numbers were altered in transmission there would be no unique solution to the square. There may be several different arrays of numbers which will make up a valid magic square. Likewise with the Compact Disc system. Eventually there may be so many errors in the data stream, due to extensive disc damage, that exact correction of the digital-audio data cannot be performed. A CD player will then interpolate the correct data from valid data by taking an average of the number before the erroneous digits and the number after them.

In the CD system, if one out of every thousand data bits were incorrect (giving a bit error rate or BER of 10<sup>-3</sup>), interpolation will be performed about 1,000 times per minute. A BER of 10<sup>-3</sup> corresponds to a very well scratched disc. If only 1 out of every 10,000 bits is in error (BER = 10<sup>-4</sup>), a typical value for an undamaged CD pressing), the interpolation rate drops to about one 16-bit sample in every 10 hours of playing time.

There is a very small possibility that an undetected error will sneak through the CD error-correction system. With the magic square this would mean that several numbers were changed in such a way that the square is still "magic" but not the same one as transmitted. In digital audio, an undetected error can lead to a "click" in the reproduced sound. The CD error correction system will produce fewer than one click for every 750 hours of playing time with a disc having a BER of 10-3. In practical terms this means that a reasonably well cared for Compact Disc pressing will never generate clicks or pops in playback. The listener is spared from these by the actions of the Compact Disc error-correction system on the data stream. 0

#### ...CD DIGITAL AUDIO

playing times. Accompanying this increase of playing time, EFM decreases the CD system's sensitivity to disc and optical-system defects and production tolerance variations.

The signal created in a CD player's photodiode detector circuitry by the EFM sequence of pits and lands has two more important properties: it has low dc (0-Hz) content and it is "self-clocking". Low dc content is important because the servo systems which keep a CD player's laser "on track" utilize low-frequency control and feedback signals. Any dc content in the signal from the photodiode detector can throw off the tracking of the laser. (Think of a very long pit or land as having substantially higher dc content than rapidly alternating, small pits and lands.) EFM has very little 0-Hz in its waveforms since the spacing and lengths of pits and lands is strictly controlled.

A CD player must synchronize its operation with the data coming from the disc and must also synchronize the rotation rate of the disc with the operation of the CD-decoding circuits. EFM has self-clocking properties allowing a CD player to determine which bit belongs to which symbol during decoding.

While the 8-bit symbols are converted into 14-bit EFM words, three additional bits are added to each word. These "merging bits" are calculated to further reduce the dc content of the signal. Finally, the end of the frame is marked by a sync signal of 24-bits length together with three merging bits. In all, a frame which started out as 192 audio bits now contains 588 channel bits. These are recorded onto a Compact Disc so that a 1 in the channel-bit sequence turns into the edge of a pit. A CD player's decoder circuits really don't care if they are scanning pits or lands; the circuits are sensitive to pit edges. It makes no difference whether a logic "1" is encoded as a pit or a land.

Inside a CD Player. A Compact Disc player has to undo all the encoding steps just described in order to recover the original 16-bit digital audio samples. The process, very simply described, follows this sequence:


1. Light from the player's semiconductor laser is focussed through a prism/lens optical system onto the surface of the spinning disc.

- 2. The reflected laser beam returns through the same optical system but is diverted to a light-sensitive detector (a photodiode array).
- 3. The photodiode output, after amplification and filtering, is converted into a squared-off pulse train by the use of comparator circuitry.
- 4. The pulse train of zeros and ones (corresponding to Fig. 4H) is demodulated according to the rules of EFM into 8-bit symbols carrying audio data, parity-check information, and C&D data.
- 5. Data control/error-detectioncorrection/memory circuits de-interleave and correct the data using the CIRC decoding rules.
- 6. Sixteen-bit digital-audio samples are assembled from the error-corrected symbols and sent to the 16-bit digital-toanalog converters where they are converted into analog voltages.
- 7. The staircase-shaped DAC outputs are smoothed by sharp-cutoff lowpass filters and the resulting analog signals make up a CD player's audio output.

This brief summary pays short shrift to the complexity and sophistication of the operations and circuitry involved. Semiconductor lasers are not universally used components, let alone in massmarket consumer products like CD players. Steps 4 and 5 make use of complex LSI chips, without which the building of a practical and affordable CD player would be impossible. For example, the three Sony-developed chips performing steps 4 and 5 and used by them and several other companies in their first CD players contain the equivalent of about 7,500 gates, not including a 16 kilobit RAM necessary for the processing. Sixteen-bit DACs weren't even available in low-cost monolithic form five years ago.


Tracking. That short list of CD-player functions also glosses over two of the most fascinating applications of servoloop techniques: the turning of the disc and the tracking of the track of pits by the laser/optical system. These two operations are controlled by digital/ analog/electromechanical servo loops of fascinating complexity. They are so intricate, in fact, that only a very broad description of them can be given here.

As mentioned before, the rotation rate of the disc is locked to the frame rate, which itself is determined by characteristics of the disc's data stream. Phase-lock techniques are used to keep the rate of disc rotation generally synchronized with the frame rate. Exact synchrony is not necessary because of

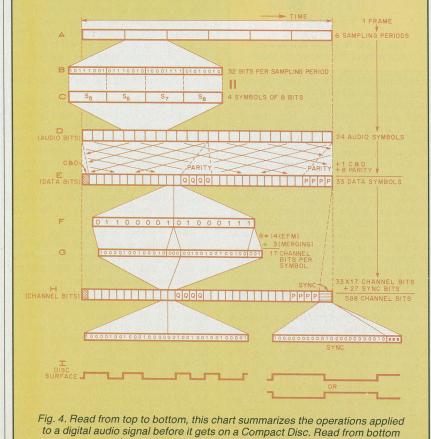

up, it summarizes the CD player recovery process.

## Now. Tektronix 60 MHz Performance is just a free phone call away!

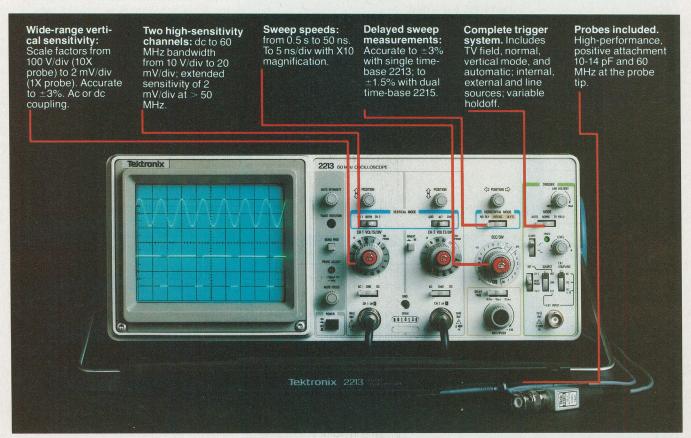

These easy to order scopes are proof that it's not expensive to have advanced, 60 MHz performance from Tektronix on your bench. It's just practical! Feature for feature, the Tek 2213 and 2215 set a price/performance standard unmatched among portable scopes. And are backed by the industry's first three-year warranty on all labor and parts, including the CRT.

So advanced they cost you less: \$1200\* for the 2213! \$1450\* for the dual time base 2215!

These low costs are the result of a new design concept that utilizes

fewer mechanical parts than any other scope.

Yet there's no scrimping on performance and reliability. You have the bandwidth for digital and analog circuits. The sensitivity for low signal measurements. The sweep speeds for fast logic families. And delayed sweep for fast, accurate timing measurements.

Scope. Three-year warranty.\*\*
Probes and expert advice. One
free call gets it all! You can order,
or obtain literature, through the
Tektronix National Marketing Center.
Technical personnel, expert in oscil-

loscope applications, will answer your questions and can expedite delivery. Direct orders include probes, operating manuals, 15-day return policy, full Tektronix warranty and worldwide service back-up.

Order toll-free: 1-800-426-2200 Extension 55

In Oregon call collect: (503) 627-9000 Ext. 55



<sup>\*</sup>Price F.O.B. Beaverton, OR. Price subject to change.

<sup>\*\*</sup>Three-year warranty applies to 2000 Family oscilloscopes purchased after 1-1-83.

#### ..CD DIGITAL AUDIO

the self-clocking nature of the data modulation scheme; EFM demodulation chips can determine where each bit belongs from the signal itself.

Servo-loop feedback techniques also keep the laser trained and focussed on the pit track. The precision of the servos systems that accomplish this is very high. Taking tracking as an example, the laser system must be guided over a spiral of pits with a pitch of only 1.6 micrometers. Disc eccentricity and player tolerance may cause the track to swing from side to side; the maximum

permitted swing is 300 micrometers. Yet for accurate decoding, the tracking servo must allow the laser beam to follow the pits to with 0.01 micrometers and also must absorb the effects of vibrations and jolts applied to the player chassis.


When it comes to focussing the laser beam onto a CD's inner signal surface, the focus servo must be able to cope with disc warps of up to 1 millimeter. The focussing system, however, must maintain focus on the signal surface to tolerances 1,000 times smaller:  $\pm 1$  micrometer.

A CD player performs such feats of electromechanical precision by monitoring the shape and/or intensity of the laser beam after it is reflected off the signal surface and back into the optical system. Deviations in the shape or intensity of the beam as detected by a photodiode array are used to move the optical system's objective lens nearer or farther from the disc surface to cope with focussing errors), or to move the optical system as a whole across the surface of the disc (to correct for tracking error).

What's Next. Even though the Philips/Sony Compact Disc is a tremendous engineering achievement, it is only part of the start of what will probably be a revolution in information-storage technology: the optical age. In its present form, a Compact Disc can hold about 16 gigabits of raw data. If the EFM modulation system is used to store computer data, a CD will hold about 9.14 gigabits or 1.14 gigabytes. If half of that capacity is used as redundant data for error detection and correction, one Compact Disc could hold about 570 megabytes of digital data, about 1,000 times the amount of a high-density floppy disc. (The error-correction system for the audio CD, as good as it is, still lets through too many interpolated and undetected errors to be tolerated in data-only applications, thus the very conservative assumption of 50 percent data redundancy.)

Since its small size increases production yields and lowers production costs over its larger (12") LaserVision videodisc counterpart, don't be surprised if the high information capacity of the CD system becomes a standard medium for mass distribution of software and data bases. The enormously larger data-carrying capacity of the 12" LaserVision system can even make it impractical for mass distribution purposes; who needs all that data anyway?

Software distribution won't be the only data application of the Compact

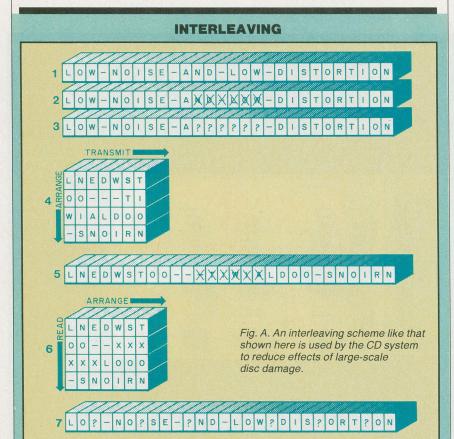

Interleaving is a process used in the encoding of Compact Disc data that reduces the system's susceptibility to what are called "burst errors." These are errors in the data stream which occur to many bits in succession. They can result from interference to the scanning laser caused by relatively large disc damage (fingerprints, long scratches).

A simple example can easily demonstrate the effectiveness of interleaving (Fig. A). Suppose you transmitted the message LOW-DISTORTION-AND-LOW-NOISE, but a burst error of six characters occured during reception. The receiver would then have a hard time figuring out what was meant by LOW-NOISE-A?????-DISTORTION (Figure A1). You could have made the transmission more immune to the loss of several consecutive characters by first arranging them in columns, then transmitting them by rows (Figure A4). The transmitted signal is thus a regularly scrambled-interleaved-version of the original signal. If six successive characters are now obliterated, the receiver can deinterleave the message by rearranging it in rows and reading it out by columns (Fig. A5 and 6). The result is a much more intelligible signal; the burst error has been dispersed into separated "random" errors (Fig. A7).

Just as these random errors are much more easily handled by readers of English, they are more easily handled by a CD player's error-correction circuitry. In fact, readers of English supply a "context" to the received message to make it intelligible. Generally speaking, a CD player does the same thing with the redundant error-correction data placed on the disc. The redundant data provides a mathematically defined and standardized "context" in which to interpret random errors in the data stream.

In the CD encoding process interleaving is accomplished by writing the audio data into a digital memory and then reading it out in a different order—the equivalent to the row/column changeover in the example. A CD player performs the opposite operation in the de-interleaving process. ♦



#### ...CD DIGITAL AUDIO

Disc system. Efforts are being made at a number of companies to come up with a practical, inexpensive method of *recording* on Compact Discs and optical videodiscs. Not only will home digital-audio disc recorders become possible with the development of such technology but home computers could easily use a recordable CD for storage of large amounts of information. Even an unerasable CD recording system could be useful.

At present, research efforts are being directed towards a suitable laser/recording substrate combination. The semiconductor lasers used in audio CD players are too weak to directly "write" on Compact Discs.

All that relates to developments five to ten years away from reaching commercial reality. Much closer to appearing on your electronics dealer's shelves is a digital signal processor for audio signals. Already, relatively slow microcomputers in typical home computers are being put to good use in audio via specialized Fast-Fourier-Transform measurement system (like the IQS system Julian Hirsch uses in testing audio equipment). Now under development are ultra-fast, special-purpose arithmetic processors which, under control of a microprocessor, can be made to perform such audio tricks as filtering, reverberation simulation, compression, expansion, click and pop removal, and sound synthesis and mixing while an audio signal is still in digital form. Among the many advantages that all-digital signal processing promises are no audible degradation in signal to noise ratio or distortion levels, the capability of extraordinarily complex realtime operations on an audio signal, and, last but certainly not least, software based processing.

Imagine an audio component looking much like a popular video-game console. Just plug in a cartridge and the system becomes a digital ambience synthesizer, or a digital multi-band equalizer, or a tick/pop remover for playing these old-fashioned stylus/groove recordings. Technologically such a system is possible today; a commercial system may see the light of day as soon as two years from now. By then CD players will be supplied with direct digital-audio data outputs so a direct link from recording studio to a home stereo system's power amplifier will be possible. The CD players and recordings available today are the start of our digital audio future, a future which promises extraordinary operating flexibility, convenience, and—above all—sound quality.

## A Hands-On Look at Magnavox's FD1000SL Compact Disc Player



MANUFACTURED by the parent company, Philips of Holland, the Magnavox Model FD1000SL is the simplest, most compact, and least expensive of the "first generation" of CD (Compact Disc) players to reach the United States market. It resembles a small, top-loading cassette deck, with a hinged clearplastic compartment cover that swings up for loading and removing discs. The sloping upper-front portion of the case contains several pushbutton operating controls. The machine is enclosed in a satin-silver-colored polystyrene case that measures 125% W x  $10\frac{1}{2}$  D x 21/8" H and weighs approximately 11 lb. Suggested retail price is \$800.

General Description. The CD is the long awaited "digital disc," about

which we have heard so much in recent years. Analog programs are sampled at a 44.1-kHz rate and converted to 16-bit digital form. The digital information controls a laser beam that burns microscopic pits into a master disc, forming a spiral pattern somewhat like that of a conventional analog record.

In its final form, the compact disc is silver colored and measures 43/4" in diameter. Recording is on only one side, the flip side being used for the label. The recorded surface is protected by a tough transparent plastic coating, making the disc relatively immune to damage from normal handling. (Fingerprints, for example, have no effect on the sound quality of a digital disc.) And, since no mechanical contact is made with the laser-read disc during playback, it does

not wear out or lose fidelity with repeated playings. Play is from the inside toward the perimeter. During play, the disc's rotating speed varies from 500 to 200 rpm to maintain an approximately constant linear scanning velocity of 1.2 to 1.4 meters per second.

The sonic performance of the compact disc is vastly superior to that of any medium previously available for home reproduction, surpassing even the most advanced professional analog tape recorders. Specifications of the Magnavox FD1000SL, typical of those for most CD players, include a frequency response of 20 to 20,000 Hz  $\pm 0.3$  dB, dynamic range and signal-to-noise ratio that exceeds 90 dB, and harmonic distortion of less than 0.005% at maximum output. An almost literally zero flutter percentage is obtained, thanks to playback timing being controlled by a quartz crystal oscillator.

Within the player, a laser scans the pits on the revolving disc, and its reflection from or absorption by the disc (a function of the recorded pattern) is sensed by a photodiode and forms a series of digital words. The bit stream is converted to analog form by 16-bit D/A converters and filtered to remove all content beyond 20,000 Hz. Unlike most CD players that use physical filters, the FD1000SL employs digital filtering.

The operating controls are reminiscent of those on a cassette deck including PLAY, PAUSE, and STOP, as well as high speed FWD and REV SEARCH. Other smaller buttons control special programming features.

# Don't let price get in the way of owning a quality printer.

Adding a printer to your computer makes sense. But deciding which printer to add can be tricky. Do you settle for a printer with limited functions and an inexpensive price tag or buy a more versatile printer that costs more than your computer? Neither choice makes sense.

Here's a refreshing option—the new, compact STX-80 printer from Star Micronics. It's the under \$200 printer that's whisper-quiet, prints 60 cps and is ready to run with most popular personal computers.

The STX-80 has deluxe features you would

expect in higher priced models. It prints a full 80 columns of crisp, attractive characters with true descenders, foreign language characters and special symbols. It offers both finely detailed dotaddressable graphics and block graphics.

And, of course, the STX-80 comes with Star Micronics' 180 day warranty (90 days on the print element).


The STX-80 thermal printer from Star Micronics. It combines high performance with a very low price. So now, there is nothing in the way of owning a quality printer.

\*Manufacturer's suggested retail price



THE POWER BEHIND THE PRINTED WORD.

Computer Peripherals Division, 1120 Empire Central Place Suite 216, Dallas, TX 75247 (214) 631-8560

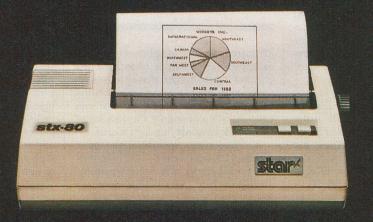



The new STX-80 printer for only \$199.

#### ...CD DIGITAL AUDIO

When the machine's disc-compartment cover is raised by pressing a button at its front-left corner, a spindle is exposed onto which the disc is placed, recorded side down. The cover is then closed manually. Pressing PLAY causes the disc to spin for a few seconds, supplying information on the number of separate selections and their precise locations on the disc (similar to the action of a computer/disc catalog). Green LEDs, visible through the window on the front panel, light up to show the total number of programs, up to a maximum of 15. Normally, as the disc is played in sequence from the first selection, a second green LED lights below the track "catalog" to show which program is being played, advancing at each subsequent selection. At end of play, the unit shuts down.

The CD player may be programmed to play tracks in any sequence, by choosing either those tracks to be played, or those to be omitted from the playing sequence. This is done with the STORE and SELECT buttons, and the track indicator lights show which have been programmed and which is being heard at any moment. The high speed SEARCH buttons can be used to slew the laser pickup to any point on the disc and resume play from that point when the button is released. Although most music records have fewer than 15 tracks or programs, the FD1000SL is not limited to that number. However, it considers everything following the track 15 to be part of that program, and cannot be specifically programmed for higher numbered selections.

Laboratory Measurements. Tests of the Magnavox unit were made using special test discs from Philips and Sony. The frequency response (identical for both channels) was measured with the Philips 410 055-2 record, and was found to be flat within ±0.15 dB from 20 to 20,000 Hz, with the variation being in the form of small "ripples" between 4,000 and 20,000 Hz. Output from a "0 dB" 1000-Hz recording was 2.03 volts, and the A-weighted S/N (measured with an IVIE IE-30A Audio Analyzer), was 99.2 dB referred to that level. The harmonic distortion, playing the 1000-Hz test tones of the Sony YEDS 2 record, which are recorded at levels from 0 to -90 dB, was -95 dB (0.0018%) at 0 dB. Since the distortion components remain at about the same amplitude for all signal levels, the percentage increased at lower recorded levels. Eventually it was masked by system noise, but even at a -20 dB level the THD was -70 dB, or 0.03%.

Intermodulation distortion was also measured at levels of 0 and -20 dB, with readings of 0.004% and 0.039% respectively (for an SMPTE measurement with 60 and 7000 Hz tones at a 4:1 amplitude ratio.) Channel separation at 1000 Hz (averaged for the two directions of crosstalk) was 99 dB, and at 20,000 Hz it was 93.5 dB. As expected, the flutter was unmeasurable, reading the instrument residual of 0.001% on our flutter meter (the same reading was obtained using the meter's internal crystal controlled 3150-Hz signal).

We made limited measurements of the model's ability to withstand physical shock without mistracking. All CD players are susceptible to losing optical contact with the recorded track if they

"The total lack of noise, distortion, crosstalk, or flutter . . .transcends anything previously available . . "

are jarred, and the Magnavox unit is no exception. However, it is at least the equal of a good record player in this respect, and has the advantage of being immune to acoustic feedback that can cause howling or simply a muddying of the sound when playing LP records.

An important consideration for a compact disc player is its ability to correct for bit errors, which are inevitable during playback. All available machines employ fairly elaborate error correction systems, typically designed to cope with interruptions of up to 3000 or more bits without loss of tracking or even a noticeable gap or noise in the program. To evaluate the effectiveness of these error correction circuits, we used a special Philips test disc on which a wedgeshaped portion of the information layer (recorded with music) is "damaged," so that the length of the dropout can be determined by reference to the disc portion being played. It also has dots of different sizes painted on the transparent protective layer to evaluate the effect of external dirt or scratches on information retrieval, as well as a simulated fingerprint formed of parallel-ruled lines. The Magnavox FD1000SL was outstanding in this test, being completely unaffected by any of the errors on the test disc.

User Comment. The Magnavox FD1000SL worked perfectly in extended-use tests, playing a number of commercial-music CD records and sampler discs. The programming system was flawless, with the sound beginning exactly at the start of each programmed selection. However, the movement of the pickup to the programmed position, or under the control of the REV and FWD SEARCH buttons, was very slow compared to other machines we have used. For example, if selection #15 was the first programmed for playing, the unit required more than 18 seconds to reach it from the starting point, compared to typical times of 1 to 6 seconds for other machines.

The Compact Disc is in its infancy, of course, and whatever opinions one might form on the basis of incomplete information or hearsay are likely to become modified in the future. Our reaction to it is overwhelmingly enthusiastic. The total lack of noise, distortion, crosstalk, or flutter results in a listening experience that transcends anything previously available to an audio enthusiast.

Not every digital recording is so outstanding (many come from analog masters, and cannot be better than the master tape), but the medium is everything that has been claimed for it. It will not replace the LP record for some time, if ever, but will supplement it much as tape has supplemented records for decades. Inevitably, the price of the CD players will come down to the level of any reasonably good turntable or cassette deck, and at that time anyone who is serious about good sound will have added digital disc capability to his music system.

It is important not to confuse the Compact Disc with the so-called "Digital Discs" that have been on the market for some time, and which are really conventional analog LP records made from digital master tapes. They are indeed likely to be superior to standard-type LPs. However, our experience suggests that a CD made from a good analog master tape is likely to be much better than an LP made from a good digital master. CD discs are expected to sell for \$17 to \$22 each, a premium price for a premium sound and long-lived fidelity. -Julian D. Hirsch

Circle No. 95 on Free Information Card

# The Terrific-80 RADIO SHACK'S NEW TRS-80 DESKTOPPER

WHEN the early TRS-80 Model I computers appeared, pioneering widely available, modestly priced personal computers, detractors jeered at the absence of lower-case letter, color-video, and calculator keyboard, calling them by the name, "TRASH-80." Like "Yankee Doodle," the name stuck and became an affectionate one. The computer itself evolved through several modification improvements and enhanced versions to become one of the most popular computers ever built.

Recently, when I reported on my trip to Ft. Worth and the Radio Shack Model 100, I mentioned how I also saw, under wraps in the back office, the latest model in this successful series—the TRS-80 Model 4.

When I looked at the Model 4, my first thoughts were, "Oh, a white Model III, that's nice." When I began to use it, however, and understand its features and software, I kept saying "terrific, terrific!" So I want to offer a new and well deserved name, "TERRIFIC-80," for the newest and best of the marque.

It is not until you sit down at the keyboard, turn it on, and start to use the computer that the differences become apparent. The CRT display is 80 characters by 24 lines instead of the 64 characters by 16 lines of the Model III. Actually there are six video modes:

- White on black (normal)
- Black on white
- 64 characters by 16 lines (Model III mode)

- 32 characters by 16 lines (Model III mode)
- 80 characters by 24 lines (Model 4 mode)
- 40 characters by 24 lines (Model 4 mode)

The display can show the full ASCII character set and 64 graphies characters.

The keyboard of the Model 4 looks similar to that of the Model III. However, the former has several added keys that were sorely missed by users. One is a CAPS key, which provides the useful caps-lock function. The others are the CTRI (Control) key, which was missing on the Model III keyboard, and SHIFT

keys located on either side of the bottom row. There are also three user-defined function keys marked F1, F2, and F3. These are used in application programs to provide single keystroke data entry.

The major physical differences between the new computer and the Model III are internal. In this case, it's what you don't see that counts.

The Model 4 contains 64K bytes of user memory, which can be upgraded to 128K bytes. The additional 64K bytes are used as memory pseudo-disk called Memdisk. The Model 4 can also be used with a Radio Shack hard-disk drive.

This Memdisk feature is a very interesting concept. It lets you add a solid-



## **NTS Electronics**

NTS Intronic Training is a carefully developed Learn Robotics, and tested learning system providing a tho-Microcomputers, Microprocessors,
Digital Video, Test
Equipment and more
with NTS I∏TR□∏IC™home training. Courses include state-of-the-art equipment, lessons and texts to make your hands-on programs exciting and down-toearth practical.

HERO 1 is included in two courses, one basic and one advanced. You'll cover principles of industrial electronics, microprocessor troubleshooting, fundamentals of mechanics, and robotic applications in industry. You'll learn analog and digital skills, radio control, fluidic, pneumatic and servo-mechanisms, as well as computer interfacing and robotic programming. HERO 1, complete with arm, gripper and speech synthesis board, is a fully self-contained electro-mechanical robot-the featured unit in the most exciting training programs ever offered in home study.



rough intergration of advanced electronic

relationship between theory and practical applications is made clear through the hands-on experience of building and assembling kits of state-of-the-art equipment. Courses include a wide variety of test instruments, both digital and analog, as well as other units not shown here. And, depending on

hardware with modern lesson texts. The

the NTS program you select, you

## Training... **FIRST WITH TOMORROW'S** TECHNOLOGY Simulated TV Recention

1.

1. Advanced "Z Chassis" NTS/HEATH "Smart Set" with computer space command remote control and space phone. Originate or receive telephone calls through this set and the number appears on the screen-store your police and other emergency numbers into memory which may be recalled and auto-dialed at any time. Traditional and incomparable picture quality. Unit has Quartz Controlled Tuning, 178 channel capacity, remote antenna switch accessory for reception of VCR, VDR, Broadcast, Cable, Video Games, and Personal Computer Input (no cable change) plus computer- controlled color. Featured 2.

2. NTS/HEATH HN89A Microcomputer is included in two programs. This famous and reliable unit features Floppy Disc Drive, 48K Memory on Board, CRT Terminal with its own Z-80 Processor, and standard keyboard as well as Numerical Input Keyboard. The growing importance of computer knowledge and skills have made these programs increasingly significant. The experience gained in assembling these kits is invaluable in the

in all-new Video Technology Course.

3. NTS Microprocessor Trainer is included in our Industrial and Microprocessor Technology Course. It is a portable unit, contained in

a convenient high-impact carrying case. Hardware/ Firmware includes Monitor Operating System-Expandable User Memory-User Experimental On-Board Section-Breakpoint Editor-Single Step Trace-Cassette I/O.

understanding of computer troubleshooting skills.

NO OBLIGATION

NO SALESMAN WILL CALL



**TECHNICAL TRADE TRAINING SINCE 1905** Resident and Home-Study Schools 4000 So. Figueroa St., Los Angeles, CA 90037

Use the mail-in card or fill out and mail the coupon. Indicate the field of your choice. (One, only please.) FREE full color catalog will be sent to you by return mail.

3.

12:01:36

NATIONAL TECHNICAL SCHOOLS  Dept. 205-083  4000 South Figueroa Street, Los Angeles, CA 90037  Please send FREE color catalog on course checked below:			
☐ Robotics ☐ Digital Electronics ☐ Auto Mechanics	☐ Computer Electronics ☐ Video Technology ☐ Home Appliances ng/Solar Heating		
Name	Age		
Address			
Apt City			
State	Zip		
☐ Check if interested in G.I. information. ☐ Check if interested ONLY in classroom training in Los Angeles			

#### ... RADIO SHACK

state "disk" to the system, which keeps its files in memory. Files stored this way can be accessed, read, and written to with much more rapidity than ordinary disk files on a floppy. You can also use the Memdisk feature if you only have 64K of RAM, but its principal use is with the extra bank of memory that the Model 4 will support. All TRSDOS utilities treat the Memdisk files exactly like any other drive, so you can COPY, BACK-UP, REMOVE, PURGE, ATTRIB (protect), and display the directory of the files on the Memdisk.

Like the Model III, the Model 4 comes with a parallel printer interface; however, there is an optional serial RS232C interface.

One of the new options of the Model 4 in the ability to use CP/M Plus, the latest version of the "universal operating system." This makes the entire library of CP/M-80, user controlled software available to TRS-80 Model 4 users.

Of course, the Model 4 uses the latest version of Radio Shack's operating system, TRSDOS, as it major system. This is TRSDOS 6.0. This version is substantially different than previous versions of TRSDOS. To TRS-80 experts it will look like an operating system that was written for Models I and III, called LDOS. The reason for this is that it is the latest edition of LDOS!

When Radio Shack first decided to release its disk system for the TRS-80 Model I, the decision was made to use a Radio Shack DOS rather than adopt one of the major disk operating systems available for licensing. A new system was written and released as TRSDOS 1.0, but it has bugs in it like all the new systems. These were corrected and the system was extended as it went through various updates.


Other companies came out with alternate operating systems for the TRS-80 computers, some of them compatible with TRSDOS and some not. Each gained some users. After a while, those TRS-80 owners who were considered expert came to respect LDOS from Logical Systems as a superior DOS. Radio Shack now sells it as an alternate for the Model III.

When it came to providing a new operating system for the Model IV, Radio Shack broke with its tradition and went to Logical Systems for a new version of TRSDOS that was based on LDOS. The result is TRSDOS Version 6.0, a really fine system. It has features that are found in very few personal computer operating systems.

Radio Shack has gone to a great deal of trouble to ensure compatibility with previous versions of TRSDOS and with LDOS. The version of TRSDOS used with the Model III is 1.3 and it is compatible with the Model 4. However, there are a few differences. An application program running under TRSDOS 1.3 prints larger and fewer characters on the screen than one running TRSDOS 6.0. This is because it is designed for the 64-character screen on the Model III. TRSDOS 1.3 commands work slightly differently than TRSDOS Version 6, but the differences are clearly explained in the manual.

The two versions of TRSDOS format disks differently. There is a conversion program on Version 6 called CONV to move files stored on a Version 1.3 diskette to a Version 6 diskette. This is not necessary in order to run Model III programs on Model 4.

TRSDOS 6.0 has many more features than I can mention in this article, but found on many other systems.

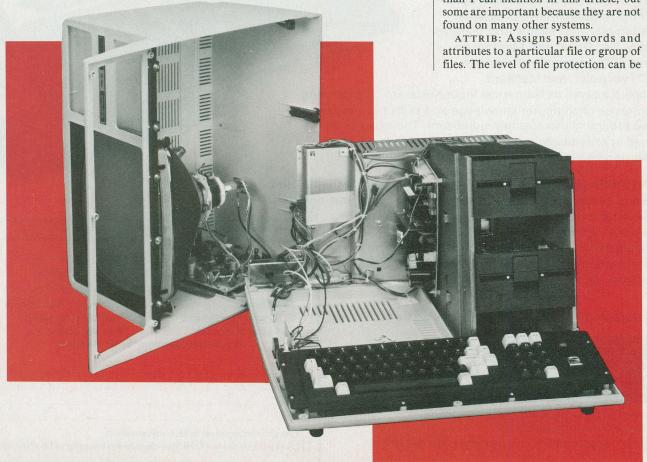

**VIC 20** 

## 40-80 COLUMN BOARD





Now you can get 40 or 80 Columns on your T.V. or monitor at one time! No more running out of line space for programming and making columns. Just plug in this board and you immediately convert your VIC-20 computer to 40 or 80 columns! PLUS, you get a Word Processor, Mail Merge program, Electronic Spreadsheet (like VISICALC) and Terminal Emulator! These PLUS programs require only 8K RAM memory and comes in an attractive plastic case with instructions. List \$149 Sale \$99

● COMMODORE 64 COMPUTER — "80 COLUMN BOARD" LIST \$275 SALE \$179

Less \$20 Accessory Purchase Discount

"15 DAY FREE TRIAL"

- We have the lowest VIC-20 prices
- We have over 500 programs
- Visa Mastercharge C.O.D.
- We love our customers!

RPRIZES (WE LOVE OUR CUSTOMERS)

**BOX 550, BARRINGTON, ILLINOIS 60010** Phone 312/382-5244 to order



### MAKE YOUR VIC-20 **COMPUTER TALK**

when you plug in our

ONLY

### VOICE SYNTHESIZER

You can program an unlimited number of words and sentences and even adjust volume and pitch. You can make: Adventure games that talk • Real sound action games

This voice synthesizer is VOTRAX based and has features equivalent to other models costing over \$370.00. To make programming even easier, our unique voice editor will help you create words and sentences with easy to read, easy to use symbols. The data from the voice editor can then be easily transferred to your own programs to make customized talkies.

\* FREE — Your choice of \$19.95 4" Speaker and Cabinet or \$14.95 Voice Editor if you order before June 15, 1983!

"15 DAY FREE TRIAL"

- · We have the lowest VIC-20 prices
- We have over 500 programs
- Visa Mastercharge C.O.D.
- We love our customers!

PRIZES (WE LOVE OUR CUSTOMERS)

**BOX 550, BARRINGTON, ILLINOIS 60010** Phone 312/382-5244 to order

#### ..RADIO SHACK

set to be restricted to a person who enters a password. Moreover, the protection can be set up in levels so that a password can only EXECUTE (Run) a program, READ a program, UPDATE a program, WRITE to a program, RE-NAME a file, or REMOVE a file. This kind of protection is usually only found on larger systems.

COMM: A built-in communications program that lets two computers talk to each other via a device, usually the RS232C serial communications. COMM lets the Model 4 be used as a terminal in communications and to transfer files to and from another computer. In addition it can be used to spool output from another computer to the printer. COMM also allows the computer to access Bulletin Board Systems Networks, and Electronic Mail Systems. While this type of thing is common, it is rarely built into an operating system. It is not only a money saver, but a great convenience that many users will appreciate.

The function keys F1 and F3 actually have many more possible functions

#### The Micro Color Computer





For a long time there has been a rumor that Radio Shack was about to come out with a new, low-cost, color computer. I asked about it during a recent trip to Fort Worth to see some other new models, but all I got from the Radio Shack people at that time was a smile.

One day shortly after I returned to

home base, I got a phone call advising that I was about to receive a package "that I had asked about." I was as eager as a kid before Christmas, waiting for UPS to deliver that package. When it did arrive, I opened it with great expectation. Inside was a rare jewel, a little computer, 2" high by 8½" long by 7" wide, called the Model MC-10 "Micro Color Computer." It comes with an external power supply and a TV switch.

There is an excellent manual and a quick reference card to teach you how to run and program the little fellow. This is really a course in Micro Color BASIC, a dialect that is almost the same as TRS-80 Color Basic for the CoCo, the Shack's Color Computer. The keyboard has small keys (shaped somewhat like Chiclets), but

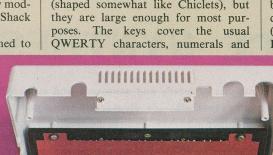

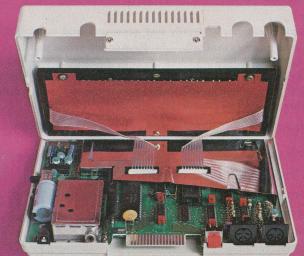

punctuation marks, plus cursor commands and graphics characters. There is a second shift level entered using the CONTROL key. With this level, you can perform single key BASIC commands inscribed above the keys. These include such commands as RUN, CONT, CLOAD, NEW, LIST, CLEAR, CLSD, PRINT, STOP, END, SET, RESET, READ, RESTORE, FOR, NEXT, STEP, INKEY\$, INPUT, GOSUB, RETURN, IF, THEN, GOTO, SOUND, PEEK, and POKE. The trig functions and RND function are also available as single-key entries.

This is a color computer and can produce nine distinct colors. It can also produce sound under program control. In addition to the graphic characters, the MC-10 can use point graphics with a 64 by 32 grid. This is not very high resolution, but still good for such a small computer. It is like the dancing dog, which can not dance very well, but it is a wonder that he dances at all!

The MC-10 also has the capability of being connected to a tape recorder for data storage and through a serial port (DIN connector) to a serial printer. The Radio Shack TP-10 printer may be

> used. This is a 32-character, 4"-wide printer that's capable of printing all the MC-10 graphics characters. Further, the Radio Shack LP VII or LP VIII or the DMP-100, DMP-120, DMP-200, or DMP-400 printers may be used. You can also connect the MC-10 to the CG-115 or FP-215 Flatbed Plotters.

The MC-10 comes with only 3K of user memory, but there is a cover plate protecting a card edge connector that brings out an expansion bus.

I liked this small computer very much at the announced price of \$119.

through combinations of the CLEAR key and the function keys. This is used in the COMM program to control many communication application functions involved in "handshaking" between interconnected devices, COMM is the program that enables the Model 100 to download its information into the TRS-80 Model 4

CONV: Converts the data files from a Model III diskette to a Model 4 diskette.

DEBUG: Enters, tests, and runs machine language programs for debugging. This is a very valuable function.

SPOOL: Establishes a FIFO (First-in, First-out) buffer for a device, usually a printer. It enables the computer to print data while other operations are performed on the computer.

FORMS: Another unusual and useful command in TRSDOS 6.0. It allows printing a form larger or smaller than a standard-size page. Another feature not often found in an operating system, but nice to have.

JCL: The TRSDOS Job Control Language is one of the most powerful features of the TRSDOS 6.0. It permits the writing of programs that perform a variety of functions such as FORMAT, and BACKUP and have TRSDOS run them when a single command is typed in. This makes the system much more "user friendly."

These features and many others cause people to applaud TRSDOS 6.0 as a major contribution to personal computing software. It not only provides a jumping-off place for new and better systems, it does it without obsoleting the large stock of TRS-80 programs already in the Library.

In addition to providing a selection of operating systems, Radio Shack has also provided a choice of langauges for every purpose. These include MBASIC, BASIC Compiler, and FORTRAN from Microsoft; CBASIC from Digital Research; Pascal from Alcor; Radio Shack Graphics BASIC (649 × 240 resolution); RM COBOL from Ryan McFarland; and an Assembly Language Development System including Macro Assembler.

Adding up the number of application programs, languages, and systems that are available for the Model 4 in TRSDOS 1.3, CP/M-80, and LDOS, this has to be one of the best-supported new computers ever released. In addition, Radio Shack has converted its line of business software into Model 4 format.

We say again, the Model 4 is really the TERRIFIC-80. —Stan Veit

For more information on advertised products, equipment tested, etc., circle appropriate number on postpaid Free Information Card.

# New Inmac Catalog jam-packed with computer/wp supplies.

Yours free!

Accurately called "the bible of the industry," it's loaded with great products and ideas for your personal computer, minicomputer or word-processing system. You'll enjoy:


One-stop shopping. Over 2,000 products

- One-stop shopping. Over 2,000 products o choose from.
- Easy ordering. Mail, phone, or TWX.
- Fast delivery. 24-hour shipment. Overnight emergency shipments available.
   45-day trial. Full refund if not completely
- satisfied.

  Guaranteed quality. All products field-
- tested to highest standards.

  Lower shipping costs. 8 fully stocked distribution centers serving the U.S.

For fastest delivery of your free 100-page Inmac catalog, call 1 (800) 547-5444. 1 (800) 547-5447 in California.

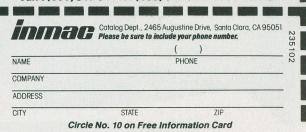

# MICINIDSH STEREO CATALOG and FM DIRECTORY Get all the newest and latest information on the new

McIntosh stereo equipment in the McIntosh catalog. In addition you will receive an FM station directory that covers all of North America.







SEND TODAY!

McIntosh Labor East Side Statio Binghamton, N.	
NAME	
ADDRESS	
CITY	STATE_ZIP

If you are in a hurry for your catalog please send the coupon to McIntosh. For non rush service send the **Reader Service Card** to the magazine.

CIRCLE NO. 31 ON FREE INFORMATION CARD



## LAST NIGHT WE EXCHANGED LETTERS WITH MOM, THEN HAD A PARTY FOR ELEVEN PEOPLE IN NINE DIFFERENT STATES AND ONLY HAD TO WASH ONE GLASS...

#### That's CompuServe, The **Personal Communications Network For Every Computer** Owner

And it doesn't matter what kind of computer you own. You'll use CompuServe's Electronic Mail system (we call it Email™) to compose, edit and send letters to friends or business associates. The system delivers any number of messages to other users anywhere in North America.

CompuServe's multi-channel CB simulator brings distant friends together and gets new friendships started. You can even use a scrambler if you have a secret you don't want to share. Special interest groups meet regularly to trade information on hardware, software and hobbies from photography to cooking and you can sell, swap and post personal notices on the bulletin board.

There's all this and much more on the CompuServe Information Service. All you need is a computer, a modem,

and CompuServe. CompuServe connects with almost any type or brand of personal computer or terminal and many communicating word processors. To receive an illustrated guide to CompuServe and learn how you can subscribe, contact or call:

### CompuServe

Consumer Information Service, P. O. Box 20212 5000 Arlington Centre Blvd., Columbus, OH 43220

800-848-8990

In Ohio call 614-457-0802

An H&R Block Company

## High-Grade

## DATA CONVERTER FOR THE APPLE II

By Robert C. Nicklin

Part 2: Checkout, calibration, and use

LAST month, we discussed the principles of A/D and D/A conversion and described a converter for the Apple II. Here are the software and instructions needed to operate the converter.

**Checkout & Calibration.** Plug one end of a ribbon cable with DIP headers on each end into Port A at SO4 on the interface adapter. Then, making sure the Apple computer is powered down, install the VIA in slot 5 of the computer. Plug the other end of the cable into a solderless-socket breadboard and use wire jumpers to connect D0 through D7

to ground at pin 11. Switch on the computer and wait for the prompt to appear onscreen. Measure the voltages at pins 50, 33, and 25 of the computer's bus connector; they should read +12, -12, and +5 V, respectively.

For the following discussion, the interface is assumed to be plugged into slot 5 of the computer and all data lines are grounded.

Enter and run Program 1 to test the input to Port A. Displayed on-screen should be a running column of 0s read in from Port A. One at a time, remove the data line jumpers from ground and note the change in status dis-

played on-screen. As each data line is ungrounded, it should display a 1 on the screen. If it doesn't, the interface adapter most likely isn't plugged into slot 5 of the computer and/or the program hasn't been correctly entered. If the problem still persists after making sure that the adapter is in slot 5 and the program has been properly entered, use a dual-trace oscilloscope to check the *IC7* delay circuit. For proper operation, the signal observed at pin 6 of *IC7* should be delayed by about 180 ns with respect to the signal at pin 1.

Remove the ground connections

from D0 through D7 and load and run Program 2 to test the output. For Byte=0, there should be no voltage (0 volt) between each data line and ground; for Byte=255, each data line should be at +5 volts; for Byte=55, D0 through D7 should be 10101010, etc.


Load and run Program 3 to test control line CA2. Making measurements at J6, CA2 should be 0 V for PC=12 and +5 V for PC=14.

To test Port B, power down the computer and move the DIP cable to SO3. Repeat the above three tests, changing the POKE and PEEK addresses for

DDRB and ORB as detailed in Table I. The PCR address doesn't change, but the values for PC change to 192 for 0 V and 224 for +5 V to operate CB2.

Having ascertained proper port and control operation, remove the ICs from the Data Converter assembly, power down the computer, and plug the 16-pin DIP cable into SO3, the Port B connector. Power up the computer and con-

firm that +12, -12, and +5 V are present at the appropriate IC socket pins. (Bear in mind that under these no-load conditions some non-power pins will measure high.) Having con-

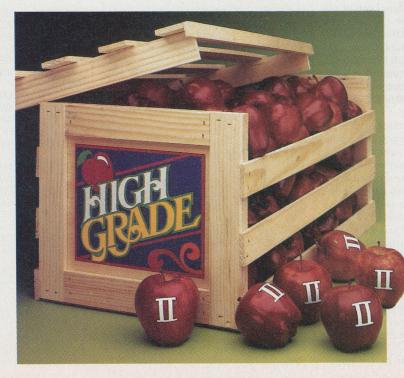

#### ..DATA CONVERTER

firmed that the proper voltages are present at the appropriate pins, power down the computer, insert the ICs in their respective sockets (take care to observe proper orientation), and power up once again.

Connect a voltmeter to J2 and ground the center connector of J1 to begin testing the analog amplifier. Set the project's GAIN switch to 1 and adjust trimmer R3 for a 0-V output. Set the GAIN switch to 500 and adjust R3 for minimum positive output. To check calibration of the GAIN control, remove the short from across J1 and replace it with a 10,000-ohm potentiometer connected across a D cell (use the wiper and one end lug of the pot to make connections to the converter circuit) to provide the dc signal input. Make up a table of input vs output for each of the six positions of the GAIN switch for use in making software corrections to compensate for nonlinearities in gain.

If you have access to an audio oscillator and an oscilloscope, feed sine waves into JI and monitor J2 to observe that the amplifier has reasonably flat response from dc to 15 kHz.

Enter and run Program 4 to check D/A conversion. A voltmeter connected between DAC J5 and ground should indicate 0 V when DB is 0 and 2.55 V when DB is 255.

Use Program 5 to generate a square wave whose pitch is controlled by the value of P for checking the audio amplifier. This square-wave signal can be observed at *J5* with a scope.

Program 6 sets DDRB=0 for all inputs for testing the digital I/O lines. D1 through D6 will float high while D0 and D7 are checked. The running display produced by this program will change according to whether D0 or D7 is shorted (see Table II).

A/D conversion is tested with Program 7. This simple diagnostic program is written in BASIC, which is slow enough to complete a conversion before being read. Results are continuously displayed on-screen. With J1 grounded and the GAIN switch set to 1, the reading should be 0 on dc and about 127 on ac. Connect the pot/D-cell assembly to J1 and slowly vary the setting of the pot (dc input level). The on-screen display should follow the changes. Make sure the -9-volt reference is present at pin 2 of IC2. A scope connected to TRIG J6 should reveal CB2 going high for about one-third or one-quarter of the pulse cycle. Without this pulse, no A/D conversion is possible.

Set AC/DC switch S2 to DC for ampli-

#### **PROGRAM 1**

100	REM	PROGRAM #1
120	REM	PORT A INPUT TEST
130	REM	6522 VIA IN SLOT 5
150	:	
160	REM	SET PORT A DDRA FOR INPUT
170	D=0	
180	POKE 49	363, D
190	:	
200	REM	READ ORA WHILE
		CHANGING
210	REM	JUMPERS FROM DO-D
		TO GROUND
220	PRINT P	EEK (49375)
230	:	
240	FOR PAL	JSE = 1 TO 200: NEXT
250	GOTO 2	20

#### **PROGRAM 2**

100 REM

130	REM	PORT A OUTPUT TES 6522 VIA IN SLOT 5
		SET PORT A DDRA
	el desi	FOR OUTPUT
		49363.D
		The second second
		"BYTE"; B OUTPUT BYTE TO
		PORT A
220	REM	TEST DO-D7 WITH
230	POKE	VOLTMETER 49375. B
240	GOTO	200
	130 150 160 170 180 190 200 210 220 230	120 REM 130 REM 150 : 160 REM 170 D=255 180 POKE 190 : 200 INPUT 210 REM 220 REM 230 POKE 240 GOTO

PROGRAM #2

#### **PROGRAM 3**

100 REM

120	REM	PORT A CONTROL
125	REM	LINE CA2 TEST
130	REM	6522 VIA IN SLOT 5
150	:	
160	REM	CA2 GOES LOW ON 1
170	REM	AND HIGH ON 14
180	:	
190	INPUT	"PCR BYTE=?"; PB
200	POKE	49372, PB
210	GOTO	190

PROGRAM #3

12

#### **PROGRAM 4**

100	REM	PROGRAM #4
120	REM	DAC TEST
130	REM	6522 VIA IN SLOT 5
150	: 3	
160	REM	SET DDRB FOR OUT
170	POKE	49362.255
180	100	
190	REM	SET CB2 HIGH SO DAC
200	REM	CHIP ENABLE IS LOW
210	POKE	49372,224
220	:	
230	REM	OUTPUT DB TO DAC
		AR ORB
240	INPUT	"DAC BYTE=?":DB
	POKE	49360.DB
260	GOTO	240

#### **PROGRAM 5**


100	REM	PROGRAM #5
120	REM	AUDIO AMP TEST
130	REM	6522 VIA IN SLOT 5
150	: 350	
160	REM	SET DDRB FOR OUTPUT
170	POKE	49362,255
180		
190	REM	SET CB2 HIGH SO DAC
200	REM	CHIP ENABLE IS LOW
210	POKE	49372,224
220	: 1	
230	INPUT	"PAUSE BYTE=?";P
240	POKE	49360,0: GOSUB 290
250	POKE	49360,255: GOSUB 290
260	GOTO	240
270	END	
290	FOR PA	AUSE = 0 TO P:
		NEXT: RETURN

#### **PROGRAM 6**

100 REM	PROGRAM #6
120 REM	DIGITAL I/O TEST
130 REM	6522 VIA IN SLOT 5
150 :	
160 REM	SET DDRB FOR INPUT
170 POKE	49362,0
180:	
190 REM	GROUND DO OR D7
	(4 WAYS)
200 PRINT	PEEK (49360)
210 GOTO	200

#### PROGRAM 7


	REM	PROGRAM #7 ADC TEST
	REM	6522 VIA IN SLOT 5
150 160	: REM	SET DDRB FOR INPUT
170 180	POKE .	49362,0
	REM	MAKE READ HIGH
200	REM	(WITH CB2) AND START
010	DOKE	CONVERSION
220	POKE :	49372,224
230	REM	MAKE READ LOW (WITH CB2)
240	REM	PREPARE TO READ
250	POKE	CONVERSION 49372,192
260	:	
	REM PRINT	READ ADC PEEK (49360)
290	: GOTO	
300	GUIU	210



Your source for software and books at substantial savings!

More programs, more projects, more ways to use your micro for home, hobby, and business!

Select any 6 books (values to \$125.70) for only \$2.95 when you join







336 List \$15.95

1295 List \$16.95

1468 List \$18.95















1398 List \$16.95

1485 List \$21.95

1050 List \$13.95

















1160 List \$13.95
























PLAYING THE STOCK & BOND MARKETS WITH YOUR PERSONAL COMPUTER PROCE AMMINE

1473 List \$18.95



1394 List \$15.95



List \$19.95

#### 7 very good reasons to try The Computer Book Club®

Blue Ridge Summit, PA 17214

- Reduced Member Prices. Save 20% to 75% on books sure to increase your computer know-how
- · Satisfaction Guaranteed. All books returnable within 10 days without obligation
- · Club News Bulletins. All about current selections mains, alternates, extras - plus bonus offers. Comes 13 times a year with dozens of up-to-the-minute titles you can pick from • "Automatic Order." Do nothing, and the Main selection
- will be shipped automatically! But . . . if you want an Alternate Selection—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin
- · Continuing Benefits. Get a Dividend Certificate with every book purchased after fulfilling membership obligation, and qualify for discounts on many other volumes · Extra Bonuses. Take advantage of added-value promo-
- tions, plus special discounts; on software, games, and more · Exceptional Quality. All books are first-rate publisher's editions, filled with useful, up-to-the-minute information



## The Gomputer Book Club®

Blue Ridge Summit, PA 17214

Please accept my membership in The Computer Book Club® and send the 6 volumes circled below, billing me \$2.95 plus shipping and handling charges. If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club prices (plus shipping/handling) during the next 12 months, and may resign any time there-

336 1050 1062 1141 1160 1195 1205 1228 1251 1271 1277 1295 1332 1369 1394 1398 1406 1414 1423 1442 1455 1468 1473 1485 1491 1496 1506 1533 1535 1620

Name	Phone
Address	
City	
State	Zip
International Money Orders in U.	ers outside U.S. or Canada must be prepaid i S. dollars. Canada must remit in U.S. dollars by The Computer Book Club®

#### ...DATA CONVERTER

tude calibration. Apply the full potential from the D cell to JI. Assume this to be 1.46 V, the voltmeter will indicate 7.01 V with the GAIN switch set to 5. This means that gain is actually 4.80

#### TABLE I—6522 VIA ADDRESSES, SLOT 5

Starting address	49360 (\$CODO)
DDRA	49363
ORA	49375
DDRB	49362
ORB	49360
PCR	49372
ACR	49371
ACH	49371

#### **TABLE II—DIGITAL I/O TEST**

D7	D6	D5	D4	D3	D2	D1	D0	Screen
0	1	1	1	1	1	1	0	126
0	1	1	1	1	1	1	1	127
1	1	1	1	1	1	1	0	254
1	1	1	1	1	1	1	1	255

(7.01/1.46), although the A/D converter actually "sees" 7.01 V. Measure reference voltage  $V_{REF}$  between J3 and ground. Assume it to be 8.56 volts. With full scale for the converter being 255 for any  $V_{REF}$ , the A/D converter will produce 209 (7.01/8.56). Working backward, we find that  $V_{INPUT} = (A/D \text{ output/gain}) \times (V_{REF}/255)$ . This means that conversion accuracy depends on voltmeter accuracy. Often, true  $V_{INPUT}$  isn't needed, since relative amplitude will be sufficient.

Frequency accuracy requires use of a frequency counter to set a square-wave generator to 1000 Hz (the actual frequency isn't important as long as it is known). Feed the square waves into J1 and use Table III to run the A/D converter fast enough to digitize the waveform. The Apple monitor program can be used to "look at" the bytes in memory. Another way to do this is to use a short BASIC program written to PEEK the bytes onto the screen. In either case, count the number of bytes per complete

cycle of the square wave and multiply by the frequency to obtain A/D conversion sampling rate. If the A/D timing bytes are changed, this frequency calibration can be performed and recorded for a range of digitizing rates.

Operation Under Assembly Language. For A/D or D/A at rates of less than 50 samples per second, such BA-SIC programs as those in Programs 1 through 7 are adequate. To realize rates up to 17,000 samples per second for A/D and output rates to 33,000 bytes per second with D/A, both converters must be operated with assembly-language programs. Table III is for A/D, while Table IV is for D/A code.

Operation of Table III code is similar to operation of Program 7. Port A DDRA is set for input with the A/D converter getting a high on its Read line via CA2 to initiate conversion. A loop of at least 20 µs allows the A/D section to convert the input signal. When the Read line goes low, via CA2, conversion

III—ADC ASSEMBLY LANGUAGE

\$9300	A9 00	START	LDA	\$00	
02	A8		TAY		INITIALIZE Y
03	85 FE		STA	MEM	SET START OF DATA STORAGE—
05	A9 88		LDA	\$88	ALTER FROM BASIC
07	85 FF		STA	MEM+	7.2.2.1.7.0
09	A9 00		LDA	\$00	MAKE PORT A ALL INPUTS
0B	8D D3 C0		STA	DDRA	WINTE TOTTI A ALL INTO 10
0E	78 EA EA		SEI	DDITA	
11	A9 0E	ADC	LDA	\$0E	MAKE READ HIGH, START CONVERSION
13	8D DC CO	ADO	STA	PCR	WARE HEAD HIGH, START CONVERSION
16	A2 05		LDX	\$05	GIVE ADC > 20 MICROSECONDS
18	CA	WAIT1	DEX	φυσ	GIVE ADC > 20 MICROSECONDS TO CONVERT
19	D0 FD	WALL	BNE	WAIT1	TO CONVERT
1B	A9 0C		LDA		MAKE BEAD LOW BREDADE TO
1D	8D DC C0			\$0C	MAKE READ LOW, PREPARE TO
			STA	PCR	READ ADC
20	AD DF C0		LDA	ORA	READ ADC
23	91 FE		STA	(MEM), Y	STORE DATA
25	20 40 93		JSR	MSEC	DELAY BETWEEN SAMPLES
28	C8		INY		
29	D0 E6		BNE	ADC	
2B	E6 FF		INC	MEM+	PREPARE TO FILL NEXT MEMORY PAGE
2D	A6 FF		LDX	MEM+	WITH DATA
2F	E0 92		CPX	\$92	CHECK FOR END OF MEMORY
31	D0 DD		BNE	ADC	
33	58		CLI		
\$9334	60		RTS		
\$9340	A9 00	MSEC	LDA	\$00	SET VIA TIMER 2 FOR ONE-SHOT
42	8D DB C0		STA	ACR	TIME INTERVAL
45	A9 E8		LDA	\$E8	\$03E8 GIVES ABOUT 1 msec
47	8D D8 C0		STA	T2L	INTERVAL—POKE CHANGES
4A	A9 03		LDA	\$03	FROM BASIC
4C	8D D9 C0		STA	T2H	FROIVI BASIC
4F	A9 20		LDA	\$20	TIMED O INTERDUIRT EL AC MACK
51	2C DD C0	WAIT2	BIT	IFR	TIMER 2 INTERRUPT FLAG MASK
54	F0 FB	WALL	BEQ	WAIT2	IS FLAG SET?
56	AD D8 C0				IF NOT, THEN LOOP
\$9359	60		LDA	T2L	TIMED OUT—CLEAR FLAG
φσσσσ	00		RTS		

TABLE I	V—DAC ASSE	MBLY LAN	GUAGE		
\$9200 02 05 07 08 0A	A9 FF 8D D3 CO A5 FE 48 A5 FF 48		LDA STA LDA PHA LDA PHA	\$FF DDRA FE FF	SET UP PORT A FOR OUTPUT TO DAC SAVE CONTENTS OF TWO ZERO PAGE ADDRESSES USED FOR MEM AND MEM+ IN (IND), Y ADDRESSING
0B 0C 0E	EA A9 00 A8	START	NOP LDA TAY	\$00	INITIALIZE Y FOR (IND), Y MEMORY SCAN
0F 11 13	85 FE A9 88 85 FF		STA LDA STA	MEM \$88 MEM+	START DATA READOUT AT \$8800
15 16 17 19	EA 78 A9 0C 8D DC C0		NOP SEI LDA STA	\$0C PCR	MAKE DAC OUTPUT GLITCHLESS MAKE CA2 LOW TO TURN OFF DAC
1C 1E 21	A9 0E 8D DC C0 EA		LDA STA NOP	\$0E PCR	MAKE CA2 HIGH TO TRIGGER SCOPE AND ENABLE DAC
NOTE: CA2	GETS INVERTED E	BEFORE IT GET	S TO DAC, E	3Y 7416 HEX II	NVERTER
22 24 27	B1 FE 8D DF C0 20 50 92	DAC	LDY STA JSR	(MEM),Y ORA DELAY	DISPLAY MEMORY CONTENTS ON SCOPE
2A 2B	C8 D0 F5		INY BNE	DAC	DAC GETS ONE PAGE AT A TIME
2D 2F 31 33 35	E6 FF A6 FF E0 92 D0 ED EA		INC LDX CPX BNE NOP	MEM+ MEM+ \$92 DAC	MOVE TO NEXT PAGE TO CHECK FOR TOP LIMIT
36 37 39 3B 3D	58 C6 FD A5 FD D0 CF EA		CLI DEC LDA BNE NOP	NSCAN NSCAN START	HAVE N SCANS BEEN COMPLETED?
3E 3F 41 42	68 85 FF 68 85 FE		PLA STA PLA STA	FF FE	REPLACE ZERO PAGE CONTENTS
\$9244 \$9250 52 53 55	60 A2 02 CA D0 FD 60	DELAY	RTS LDX DEX BNE RTS	\$N	DELAY BYTE
TABLE	V—CLEAR ME	MORY ASS		ANGUAG	
\$9280 82 84 85 87 88 8A 8C	A0 00 A5 FE 48 A5 FF 48 A9 88 85 FF A9 00		LDY LDA PHA LDA PHA LDA STA LDA	\$00 FE FF \$88 MEM+ \$00	INITIALIZE Y FOR (MEM),Y SAVE CONTENTS OF TWO ZERO PAGE MEMORY LOCATIONS USED FOR (IND), Y ADDRESSING OF MEM AND MEM+ START CLEARED AREA AT PAGE \$88
8E 90 92	85 FE A9 00 91 FE	CLEAR	STA LDA STA	MEM \$00 (MEM),Y	BYTE TO FILL MEMORY
94 95 97 99 9B 9D 9F A0 A2 A3 A5	C8 D0 FB E6 FF A6 FF E0 92 D0 F3 68 85 FF 68 85 FE 60		INY BNE INC LDX CPX BNE PLA STA PLA STA RTS	CLEAR MEM+ MEM+ \$92 CLEAR FF	FILL MEMORY  REPLACE ZERO PAGE CONTENTS

August 1983 67

#### ...DATA CONVERTER

#### TABLE VI—APPLE ADC LOCATIONS (SLOT 5 ASSUMED)

Hex	Address Decimal	Explanation
\$9300	37632	Start of ADC Assembly language program
9306	37638	Set beginning of data storage pages \$88-\$91 (136-145)
930C	37644	DDRA LOW \$D3 (211) DDRB LOW \$D2 (210)
930D	37645	DDRA high \$C0 (192) DDRB HIGH \$C0 (192)
9312	37650	READ HIGH (CA2 OR CB2) START CONVERSION*
931C	37660	READ LOW PREPARE TO READ CONVERSION*
9321	37665	ORA LOW \$DF (223) ORB LOW \$D0 (208)
9322	37666	ORA HIGH \$C0 (192) ORB HIGH \$C0 (192)
9330	37680	SET END OF DATA STORAGE MEMORY
9346	37702	T2L BYTE
934B	37707	T2H BYTE
9359	37721	LAST OP CODE (90 BYTES)
CA2	low \$0C 12	high \$0E 14
CB2	\$C0 192	\$E0 224

#### TABLE VII—APPLE DAC LOCATIONS (SLOT 5 ASSUMED)

Hex	Address Decimal	Explanation	
\$9200	37376	BEGINNING	
9203	37379	DDRA LOW BYTE (211)	DDRB LOW BYTE (210)
9204	37380	DDRA HIGH BYTE (192)	DDRB HIGH BYTE (192)
9212	37394	SET BEGINNING OF SCA	
9218	37400	SET CA2 LOW (12)	SET CB2 LOW (192)
921D	37405	SET CA2 HIGH (14)	SET CB2 HIGH (224)
9225	37413	ORA LOW BYTE (223)	ORB LOW BYTE (208)
9226	37414	ORA HIGH BYTE (192)	ORB HIGH BYTE (192)
9232	37426	SET END OF SCAN (SCA	
9251	37457	SCAN DELAY BYTE (0 TO	
9257	37463	LAST OP CODE	
00FD	253	NUMBER OF SCANS BEI CHECKED	FORE RETURN KEY IS

#### TABLE VIII—CLEAR MEMORY LOCATIONS (SLOT 5 ASSUMED)

Hex	Address Decimal	Explanation
\$9280	37504	BEGINNING OF PROGRAM
9289	37513	SET HIGH BYTE, START OF CLEARED AREA
928D	37517	SET LOW BYTE, START OF CLEARED AREA
9291	37521	BYTE TO FILL MEMORY WITH
929C	37532	PAGE NUMBER FOR END OF CLEARED AREA
		—DON'T CLEAR BEYOND THIS (PAGE 146 MAXIMUM
		—PAGE 146 (\$92) MEANS \$91FF IS LAST LOCATION
		THAT WILL BE CLEARED
92A5	37541	LAST BYTE OF PROGRAM

NOTE: \$8800-\$91FF ARE SET ASIDE FOR ADC, DAC. DATA STORAGE \$9200-\$93FF ARE SET ASIDE FOR DAC, CLEAR MEMORY AND ADC ASSEMBLY LANGUAGE PROGRAMS is latched so it can be read out from ORA. The sample is stored and a delay subroutine is called. The program determines if alotted memory is full; if it isn't, it sends a Read high for another conversion.

Operation of the D/A converter under the listing given in Table IV proceeds as in the BASIC listing in Program 7. Port A DDRA is set for output. A high on CA2 triggers a scope connected to J6 and, after inversion by IC4, pulls low the D/A converter's Chip Enable line. A byte is then fetched from memory and sent to the D/A converter via ORA. The program then checks whether or not the memory specified has been scanned; if it hasn't, another byte is sent to ORA. After completing a set number of scans, the program returns to the routine that called it.

Table IV can be used to clear a specific block of memory before filling it with data from the A/D converter, or before storing the output from the D/A converter. Although memory clearing can be performed from BASIC, it's too slow for more than a 1K-byte block of memory used for repeated measurements.

**Operation Under BASIC.** The various assembly-language programs presented in this article are best used as subroutines called from a BASIC driver program. It's easy to set memory limits and data rates and change to the alternate port by POKEing new values into the assembly-language code. This permits use of the fast assembly-language routines without having to be familiar with assembly-language programming. The BASIC listings for Apple DAC, Apple ADC, and Clear Memory contain the three assembly-language programs discussed. Tables VI, VII, and VIII list the POKE values required to tailor the routines to your purposes.

These programs all assume you're using an Apple II Plus computer with 48K of user RAM and slot 5 in the computer. The memory map in Table IX reveals where everything is stored. If you're using a disk drive, you can keep the DOS from overwriting the machine-language program by booting the DOS, setting HIMEM:34815 and then loading the BASIC program. This protects operation by putting data storage and machine language above BASIC and below the DOS. Memory locations 34816 through 37375 are for data storage; 37376 through 37721 for the D/A, Clear, and A/D; and 37722 through 38399 for data or expansion.

The three assembly-language routines can be easily relocated, since

except Apple ADC, they contain no absolute addresses. Because delay routine MSEC calls \$9326 (memory location 37670) and \$9327 (location 37671), Table III must be changed to fit the new location. If slot 5 in the computer isn't used, the correct VIA address for the slot must be POKEd.

**Capturing Waveforms.** The Waveform Program combines D/A, A/D, and Clear routines and illustrates use of the VIA and Data Converter. The purpose here is to capture an audio waveform and display it on the CRT screen of an oscilloscope.

Load the Waveform Program, connect a microphone to JI and a scope to J2, and set S2 to AC. Sing a steady "o-o-o-h-h-h" tone into the mic and set the

APPLE USES

\$FFFF

\$C100

GAIN switch for a peak-to-peak signal level of less than 9 volts. Connect a lead from TRIG J6 to the scope's trigger input and adjust the scope for a triggering. RUN the program while holding a note.

The computer will capture and display 1280 samples of the waveform. Since these samples are stored in memory, they can be SAVEd on disk, written to a printer, or plotted on a strip chart, or the waveform could be Fourier analyzed if desired.

With some minor changes in the BA-SIC program, 256 samples of each of 10 different waveforms could be captured and selectively analyzed. Alternatively, they could be plotted in HIRES with about a 25% loss in vertical resolution, on 192 vertical points for 256 from the A/D converter. ⋄


65535

49408

#### TABLE IX—APPLE DATA CONVERTER MEMORY MAP HEX DECIMAL

		,
\$C0FF \$C080	PERIPHERAL CARD I/O SPACE FOR 6522 VIA (8 SLOTS)	49407 49280
	APPLE USES	
\$BFFF \$9600	DOS	49151 38400
\$95FF \$935A	SPACE FOR MACHINE LANGUAGE PROGRAMS (MLP) OR CONVERTER DATA	38399 37722
\$9359 \$9300	ADC MLP	37721 37632
7 27 13 13 13 13 13 13 13 13 13 13 13 13 13	80 BYTES FOR MLP	With the
\$92A5 \$9280	CLEAR MEMORY MLP	37541 37504
	40 BYTES FOR MLP	
\$9257 \$9200	DAC MLP	37463 37376
\$91FF \$8800	ADC/DAC DATA STORAGE (PAGES 136-145)	37375 34816
\$87FF \$6000	FOR BASIC PROGRAMS (SET HIMEM:34815)	34815 24576
\$5FFF \$2000	HIGH RESOLUTION GRAPHICS	24575 8192
\$1FFF \$0C00	FOR BASIC PROGRAMS	819 <sup>-</sup> 3072
\$0BFF \$0000	APPLE USES	3071

# Hire a fast thinker.

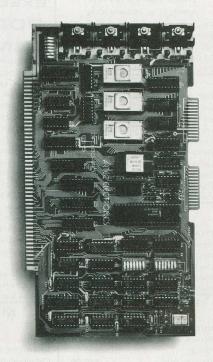


#### 5 MHz CPU Card

■ Intel 8085A-2 microprocessor ■ Hardware floating point ■ Performs calculations six times faster than other CPUs ■ On-board monitor in PROM ■ 1K RAM scratch pad ■ Keyboard or RS232C terminal ■ Variable clock frequency

PRICE—\$450 (California residents add 6% sales tax)

Call or write Artec for details.



#### ARTEC ELECTRONICS, INC

605 Old County Rd., San Carlos, CA 94070 Telephone (415) 592-2740

CIRCLE NO. 55 ON FREE INFORMATION CARD



Call for Price & Information on Franklin 1000, 1100, 1200 and other NEW Franklin Hardware & Software & Special System Pricing

#### MICRO-SCI DISK DRIVES FOR APPLE & FRANKIN

A2	.\$249.00
A40	.\$349.00
A70	.\$459.00
C2 Controller	
C47 Controller	\$89.00

#### VISICORP

for Apple, IBM & Franklin
Visidex\$189.00
Visifile\$189.00
Visiplot\$159.00
Visiterm\$89.00
Visitrend/Plot\$229.00
VisiSchedule\$229.00
Desktop Plan\$189.00
Visicalc(AppleII.CBM.IBM)\$179.00
Visicorp prices for IBM may vary slightly.

#### CONTINENTAL

SUFTWARE
Tax Advantage (Apple/Atari)\$45.00
Home Accnt. (Apple/Atari)\$59.00
1st Cl. Mail/Form Letter(Apple) \$79.00
The Book of Apple\$14.95
The Book of Atari\$14.95
The Book of Apple Graphics \$14.95

#### FLOPPY DISKS

#### MAXELL MD I(Box of 10).....\$32.00

MD II(Box of 10)	\$44.00
FD I (8")	\$40.00
FD II (8" DD)	\$50.00
VERBATI	ML
51/4" SS DD	\$26.00
51/4" DS DD	\$36.00
ELEPHA	NT
51/4" SS SD	\$18.95
51/4" SS DD	\$24.99



LID	75	C740
nP	/3	\$749.
HP 41C		\$146.00
HP 10C		\$52.00
HP 11C		\$69.00
HP 12C		\$92.00
HP 15C		\$92.00
HP 16C		\$92.00

#### Ccommodore



**CBM 64** \$23900 VIC 20 \$99.

#### CALL ON EXECUTIVE 64

#### PORTABLE COMPUTER

001111-01	
1520 Color Printer/Plotter.	
1525 80 Column Printer	.\$219.00
1530 Datasette	
1541 Single Disk Drive	
1600 VIC Modem	\$59.00
1610 VIC Term 40	\$49.00
1650 AD/AA Modem	\$89.00
1701 14" Color Monitor	
1311 Joysticks (each)	\$5.99
1312 Paddles	\$11.99
1110 VIC 8K	\$42.00
1111 VIC 16K	\$69.00
1011 RS232 Interface	\$42.00
1211 Super Expander	\$53.00
1906 Super Alien	\$12.00
1910 Radar Rat Race	\$12.00
1917 VooDoo Castle	\$15.00
1922 Cosmic Cruncher	\$15.00
1923 Gorf	\$15.00
1924 Omega Race	\$15.00
110 VIC 20 Reference Guid	e\$15.00
CBM 64 Reference Guide	\$18.00

#### MODEMS

#### HAYES

Smart	\$219.00
Smart 1200 (1200 Baud	1)\$549.00
Chronograph	\$199.00
Micromodem 100	\$309.00
Micromodem II	\$279.00
Micromodem II(with tern	n)\$299.00
Smart Com II	\$99.00
Smart 1200B	\$469.00
NOVATIO	

NOVATION
J-Cat\$119.00
Cat\$144.00
D-Cat\$159.00
103 Smart Cat\$189.00
Apple Cat II\$279.00
103/212 Smart Cat\$439.00
212 Apple Cat II\$609.00
Apple Cat II 212 Upgrade \$309.00

Apple Cat II 212 Upgrade	\$309.00
ANCHOR	
Mark I (RS-232)	\$79.00
Mark II (Atari)	\$79.00
Mark III (T.I99)	\$109.00
Mark IV (CBM-PET)	\$125.00
Mark V (Osborne)	\$95.00
Mark VI (IBM-PC)	\$179.00
Mark VII (Auto Ans./Auto Dial)	.\$119.00
Mark VIII (1200 Baud)	\$269.00
TRS-80 Color Computer	\$99.00
9 Volt Power Supply	\$9.00



#### ATARI" HOME COMPUTERS

600XL (16K Ram)	\$149.
800XL (64K Ram)	NEW
1200XL (64K Ram)	NEW
1400XL (64K Ram)	NEW
1450XL (64K Ram)	NEW
	1010 Program Recorder \$74.00

### PERCOM

AT88-S1\$369.00
AT88-A1\$299.00
AT88-S2\$569.00
AT88-S1 PD\$419.00
AT88-S2 PD\$669.00
AT88-DDA\$139.00
AT44-S1\$579.00
AT44-S2\$969.00
Texas Instruments Drive\$369.00

	MEAA
1010 Program Recorder	\$74.00
102040 Col. Printer/Plotter.	\$249.00
1025 80 Col. Printer	.\$449.00
1027 Letter Quality Printer.	\$299.00
1050 Disk Drive	.\$379.00
850 Interface	\$169.00
1030 Direct Connect Mode	mCALL
CX30 Paddles	\$12.00
CX40 Joystick	\$8.00
CX42 Remote Joystick	CALL
CX77 Touch Tablet	\$69.00
CX80 Trak Ball	\$49.00
CX85 Keypad	\$105.00
CX418 Home Manager	\$69.00
CX488 Comunicator II	\$229.00
KX7098 Atari Accountant .	\$209.00
KY7101 Entertainer	\$69.00

#### TIMEX SINCLAIR 1000

16K Memory\$	44.95
2040 Printer\$	99.95
Vu-Calc\$	17.95
Check Book Manager	13.95
Organizer	14.95
Budgeter	13.95
Stock Option	14.95
Loan & Mortage Amortizer	12.95
Mindware Printer S	109.00

#### MONITORS

300G

			1	4	I	٨	1	H	C	0	(	E	K	(										
																	\$ 1	1	5	9	١.	0	0	,

0000								
300A	\$169.00							
310A	\$169.00							
Color I	\$279.00							
Color I plus	299.00							
Color II	\$449.00							
Color III	\$349.00							
GORILLA								

#### 12" Green ......\$89.00

вмс	
12" Green	\$85.00
9191 13" Color	\$299.00
TAXAN	

12 N Green	\$129.00
12 A Amber	\$139.00
ZENITH	
ZVM 121	\$95.00
ZT-1 Terminal	\$369.00

U.S.I.
Pi 1, 9" Green\$99.00
Pi 2, 12" Green\$119.00
Pi 3, 12" Amber\$159.00
Pi 4, 9" Amber\$139.00

1400C 14" Color.....\$299.00

KX7102 Arcade Champ ..... \$75.00

#### ORBYTE SOFTWARE

Graphics\$12.99
Home Budgeter
Home Inventory\$12.99
Income Tax\$14.99
Mega Mind\$15.99
Salvo\$12.99
The Quiz\$12.99
Words\$12.99



PC-1500 POCKET COMPUTER



PC-1500\$169.00
PC-1250\$89.00
CE-150 Printer, Plotter & Cassette
Interface for 1500\$172.00
CE 125 Printer/Micro Cassette
For 1250\$129.00
CE 152 Cassette Recorder\$62.00
CE 155 8K Ram\$94.00
CE 158 8K Ram Battery\$129.00

## computer

Dept. 807 In PA call (717)327)9575 477 E. 3rd St., Williamsport, PA 17701 No risk, no deposit on C.O.D. orders. Pre-paid orders receive free shipping within the UPS continental United States with no waiting period for certified checks or money orders. Add 3% (minimum \$3.00) shipping and handling on all C.O.D. orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. NOTE: We stock manufacturer's and third party or threater for most all computers on the market. Call Inday for software for most all computers on the market. Call today for

## order 800-648-3311

Dept. 807 In NV call (702)588-5654 P.O. Box 6689, Stateline, NV 89449

#### Guidelines to Buying Impact-Type Printers

#### By Al Burawa

It's not surprising that a printer often heads one's list of most desirable computer peripherals. After all, most people want hard copies of their work.

For most applications, the choice of a printer comes down to an impact type rather than a thermal, ink-jet or other form of nonimpact design. So we will focus here on this most popular class of printers, which has two categories: fully-formed-character printers and impact dot-matrix printers.

Letter-Quality Printers. If you want print quality that is indistinguishable from that of a typewriter's characters, the popular daisy-wheel printer will likely come to mind, even though there are other methods used to achieve a similar goal. The daisy wheel is simply a flat wheel with individual-character spokes attached to it. When a key on a keyboard is pressed, it causes the wheel to rotate to the spoke that has the selected letter or number, and a hammer strikes the spoke so that the character hits a

carbon ribbon against paper to make the printed impression.

Should you wish to produce hundreds of letters, making them appear as if a secretary had typed each one individually, then a letter-quality printer is the way to go. The price you pay for this is higher cost and lower speed than dot-matrix printers—plus giving up special graphics.

Formed-letter printers such as Diablo, Qume, NEC, and similar models could have a suggested retail price in the neighborhood of \$2500; though others, such as Smith-Corona's model is below the \$1000 mark. Substantial discounts are commonly offerred, though. In contrast, the low end of impact dot-matrix printers is around \$250. For typesetting speed, formed-character printers generally range from about 12 cps (characters per second) to 60 cps, whereas dot-matrix printers usually operate at speeds from 50 to 200 cps.

Formed-character printers provide sharp, continuous characters, like those you're now reading, in a variety of sizes and fonts (styles). The actual print element is very similar to that found in the standard office typewriter. In fact, a formed-character computer printer can be thought of as an electric typewriter minus keyboard. (Printing commands are generated by the computer, either

directly from the computer's keyboard or from software.) And, as in typewriters, the elements that actually strike characters on paper are on metal or plastic "slugs" affixed to the ends of springy lever arms. In all, the daisy wheel has 96 slug/arm assemblies that radiate from a central hub, enough for the entire upper- and lower-case alphabetic, numeric, punctuation, and special ASCII character set.

An alternative to the daisy wheel is the print "thimble" element used in NEC Personal Computer Division's popular "Spinwriter" series of printers. Character slugs are arranged on the thimble's lever arms in much the same manner as on the daisy wheel, except that there are two characters per slug, one above the other. The lever arms are "folded" so that the entire assembly takes on the shape of a thimble. Alternate characters on each slug/arm assembly are accessed by a shift command similar to that used in typewriters.

To our knowledge, all print thimbles are made of highly durable plastic that's capable of delivering a useful life of several tens of millions of print impressions. Daisy-wheel print elements can be made of either metal or plastic, the latter with about the same useful life as for the thimble. Metal daisy wheels, costing several times more than plastic



#### .. COMPUTER PRINTERS

units, are designed mainly for highly intensive use, where they'll be in operation the entire business day.

Although the formed-character printer isn't capable of providing the graphics capability available with even the lowest-level dot-matrix printer, it has one very appealing advantage. That is the ability to provide an almost unlimited variety of sizes and styles of type simply by changing from print element to print element. The variety is limited only by what's available in the marketplace.

Daisy-wheel and thimble formedcharacter printers operate in the same manner to strike characters onto paper. Since they're invariably impact mechanisms, both have their character slugs struck from behind by a "hammer" that forces character impressions onto the paper through an inked or carbon ribbon as previously cited. In the case of the thimble whose alternate character is to be struck, a shift operation occurs.

Formed-character printers generally feature full-page-width (80 columns on 8½"-wide paper), although many models are able to accommodate 14"-wide paper for printing up to 132 columns horizontally. Except in the lowest-priced models, selectable pitch is common. (Pitch defines the number of printable characters per horizontal inch—pica is 10, elite is 12, and micro is 15 to 17 characters per inch.) To obtain different pitches, printwheels or thimbles must be interchanged.

With formed-character printers, there is a choice among different fonts (print styles), including a variety of standard Roman, italic, and even bold faces. The fonts can even be mixed in a single letter or document, though the procedure can be time-consuming, since each change requires that the print-wheel or thimble be changed.

Being able to change pitch and font is only part of the flexibility picture for formed-character printers. Using other options, available with hardware and/ or software, you can give a report or letter a professional printed appearance, especially when variable pitch and font changes are used in conjunction with proportional spacing, left and right margin justification, and proper hyphenation. (In proportional spacing, characters are assigned only enough horizontal space for neat, legible printing. Lower-case characters i, l, and l are assigned narrower space than such standard-width characters as a, b, c, etc., while the extra-wide M, W, m, and w are assigned commensurately more space. Additionally, spaces between words can be varied to suit the demands of the justification and proportional-spacing parameters.) A finished printed document, then, could have an appearance very similar to the professionally printed copy on this page.

As a rule, formed-character serial printers churn out copy at a much slower speed than is possible with the typical dot-matrix printer because certain laws of physics must be observed. During printing, whenever a slug is to be struck to print a character, the appropriate slug must be spun into position between hammer and ribbon. Then the entire print mechanism, printwheel plus the mechanical hammer/carrier assembly, must be brought to a full stop and pause


to permit settling. Only then can the hammer be activated to make the character impression. This entire procedure must be repeated for *each* character to be printed. Without the pauses between strikes, printed characters would smear, and the print element itself might be damaged.

Every pause to strike a character slug consumes time that reduces printing speed. The length of each pause is a function of the momentum of the movements in the entire printing mechanism as it sweeps horizontally across the paper in its track. More important, much time is consumed by having to rely on only the natural springiness of the print element's slug arm and the mass of the slug/arm assembly to return the character slug to its neutral position.

**Dot-Matrix Printers.** In dot-matrix printing, an entirely different approach to character formation is used, almost totally unrelated to that used in the traditional typewriter and formed-character printer. The only similarity to the formed-character printer is that it strikes characters on paper by impact. (There's also a *thermal* dot-matrix approach that doesn't require impacting.)

To begin with, there's no multitude of print slugs used. Instead, the 96 or more printable characters are all produced by a wire or needle matrix of so many dots wide by so many high  $(5 \times 7, 5 \times 9, 9 \times 9)$ , or any other combination). Although the matrix might be specified as consisting of so many dots wide by so many dots high, this *doesn't* mean that the actual dot-matrix printhead has 35 print pins for a  $5 \times 9$  matrix, 45 print pins for a  $5 \times 9$  matrix, etc. Actually, modern dot-matrix printheads have only one or, at most, two vertical columns of print pins.

As a rule, for a dot-matrix printer, the fixed matrix for each printable alphabetic, numeric, punctuation, special, and block graphics character is programmed into one or more ROMs resident in the printer. A number of recently introduced dot-matrix printers offer a wide choice of characters, including several international character sets. For the bit-graphics mode in which each dot can be individually selected (instead of being preprogrammed into a ROM), a feature currently exclusive to dot-matrix printers, the vertical element of the matrix is fixed, but any number of dots can make up the horizontal element, such as  $9 \times n$ , where n can be any number up to the maximum that can be printed across the page. Text characters could also be generated in the graphics

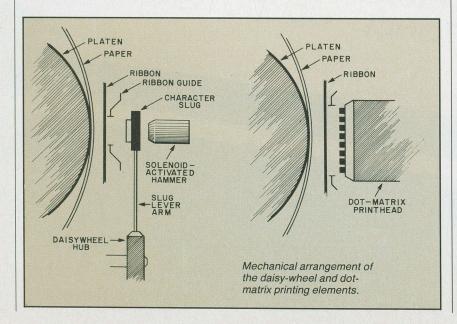

# Get all the facts about the IBM Personal Computer.


Get PC Magazine! hether you already own an IBM Personal Computer or you're thinking about buying one, you need PC Magazine. PC Magazine is the independent guide to IBM Personal Computers. Each monthly issue is packed with the latest information for everyone who's interested in IBM Personal Computers. This is the magazine for finding out how to put together the best IBM "PC" system...and how to get the most out of it. Every month you'll receive hundreds of colorful pages of evaluations, insights, and straight talk from respected experts-professionals in computer science as well as lawyers, businessmen, writers, educators and many others. PC covers software, hardware, applications, and every other topic of importance to the thousands of IBM Personal Computer users who read it. To make Product Guide sure that we give you the facts you need, we include a special "Userto-User" section, a "PC Wish List," and news about IBM Personal Computer clubs, events and publications. Right now you can save up PC" Magazine P.O. Box 598, Morris Plains, NI 07950 to 33% on an introductory subscription. And if you're Yes! I want to subscribe to PC, the independent guide ever dissatisified with PC. to IBM Personal Computers: just write and tell us-you'll One year (12 issues) only \$19.97-20% off! receive a prompt refund for Two years only \$36.97-26% off! Three years only \$49.97-33% off! all the unmailed issues re-Savings based on full one-year subscription price of \$24.97. maining in your subscrip-CHECK ONE: Payment enclosed. Bill me later. Mr./Mrs./Ms.\_ (please print full name) Company. Address.

Offer valid only in the U.S., its territories and possessions. Please allow 30 to 60 days for delivery of first issue.

#### ... COMPUTER PRINTERS

mode, but since each would have to be constructed as needed, this would be very time-consuming and would require slow single-direction printing.

Virtually any character, text or graphic, can be generated and printed in a matrix of dots, provided the matrix is large enough. In a  $9 \times 7$  matrix, for ex-

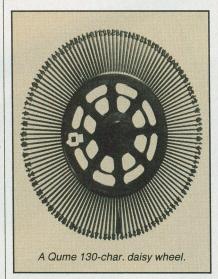

ample, it's possible to construct the standard ASCII character set in upperand lower-case Roman and italic characters as well as superscripts and subscripts and underlining. Additionally, by controlling other parameters during printing, one can obtain different levels of legibility quality.

Data-quality printing is the least legible, revealing gaps between the dots. However, data-quality printing is still extensively used in noncritical applications because its basic advantage is its high-speed throughput.

Moving up in legibility, we come to so-called "correspondence" quality dot-matrix printing. Here we find each character is more or less continuous, with no gaps between the dots. Correspondence-quality characters have an unfinished, slightly ragged appearance, though they're a vast improvement over data-quality characters. To obtain this level of quality, each character is struck more than once (usually twice to fill in the gaps) as the printhead sweeps across the paper. Consequently, printing in correspondence quality is slower than for data-quality printing by as much as 50%.

For maximum legibility, some of the latest dot-matrix printer models feature a mode called "near-letter-quality" (NLQ) printing. As the name implies, characters generated in this mode are generally continuous and therefore

much less ragged in appearance than in the correspondence-quality mode. At first glance, they could almost be taken as having been generated by a formed-character printer, the only immediate giveaway being the unavoidable slight raggedness of descenders for the g, y, and j. As it's improved, this mode will probably become acceptable for even letter and report writing that have exclusively been the province of formed-character printers.

Combining near-letter-quality printing with the capability of mixing in graphics without having to change printers will further add to the appeal of the dot-matrix printer in the future. Of course, to obtain near-letter-quality printing, one must sacrifice something. In this case, it's printing speed, which may be as little as 25% of the speed obtainable with the same printer in the data-quality printing mode, since several passes are required to provide the desired printed dot density.

Aside from providing different levels of legibility, dot-matrix printers offer another feature that greatly adds to their appeal. That is the ability, under software control, to change pitch and density of the print. Typically, characters can be printed out condensed, normal, and expanded, representing three different pitches. Furthermore, in all three pitches, they can be doublestruck, emphasized, or emphasized double-struck. Depending on the capabilities built into any given printer, you can have at your command a range of fonts/sizes/densities for type that can't be matched by any typewriter and few, if any, formed-character printers. Not all dot-matrix printers currently on the market offer this full range of facilities, of course. And even among those that do, one might offer these standard, while another might provide them as extra-cost options.


With dot-matrix printers, you have a much wider variety of types and models from which to choose. For a minimal investment of, say, \$100 or less, you can choose a partial-page-width (20 to 40 columns horizontally) nonimpact thermal printer. This miniature model is an excellent companion for the compact battery-operated portable computer and, in some applications, for a desktop computer. However, if you plan to use your system for word processing or other serious applications, a full-pagewidth printer capable of printing 80 to 132 columns would be a much more practical choice.

Full-page-width dot-matrix printers can be obtained with a thermal printing

mechanism but without most of the bells and whistles available in more expensive printers at relatively low cost. Bear in mind, however, that the specially treated paper for thermal printing may not be readily available in your area and that it's more costly than ordinary paper.

A full-size *impact*-type dot-matrix printer is preferable for all-around data/word processing and printing of computer graphics. This category has the broadest range of models available, at prices from as low as \$250 on up to and beyond \$2000. Almost all such printers feature the same or similar basic printing mechanism; so how much you pay for a given model will depend on what you're looking for in terms of speed, versatility, reliability, operating convenience, etc. As a rule, the faster, more versatile, and convenient a printer is to operate, the greater its cost.

A completely different design approach and different materials are used in the dot-matrix printing scheme. Consequently, many of the constraints imposed by formed-character printers are eliminated or dramatically reduced, making it possible for the dot-matrix printer to operate at much faster printing speeds than is possible with the typical formed-character printer.




To begin with, there are no spinning character slugs in the dot-matrix printer. Therefore, the only positioning motion is the horizontal sweep of the print head across the paper. Pauses occur only when a carriage-return/line-feed or line-feed-only operation is encountered in the drive data coming from the computer during the uninterrupted sweep. Very small and lightweight pins in the printhead are selectively "fired" and withdrawn at lightning speed to form letters. Even though the printhead is in motion, therefore, there's no time for the dots to smear as they're being printed.

Elimination of a spinning print element and pausing for settling time and striking, plus the fact that the print pins

are *power* fired and retracted, make it possible for the dot-matrix printer to operate at speeds up to 400 cps in the most expensive models. For moderately priced printers, speed is more like 100 to 200 cps, which is two or more times faster than that available with very expensive formed-character printers. Even low-end economy-priced dot-matrix printers offer speeds in a range between 60 to 150 cps.

The speed specification for a dot-matrix printer can be misleading. Virtually all dot-matrix printers that have been introduced into the marketplace during the past few years are designed to operate at two or three speeds, depending on the print function activated. The fastest specified printing speed is for standard single-pass "data-quality" printing, in which dots are printed with blank space between the dots.


So-called "correspondence-quality" printing, introduced a few years ago to improve legibility, is achieved with two-pass (sometimes called "overstriking") printing, which fills the normally blank spaces between the dots with more dots to form more or less continuous characters, though actual printed characters will have a somewhat ragged, unfinished appearance. Operating a dot-matrix printer in the correspondence-quality mode usually halves the speed.

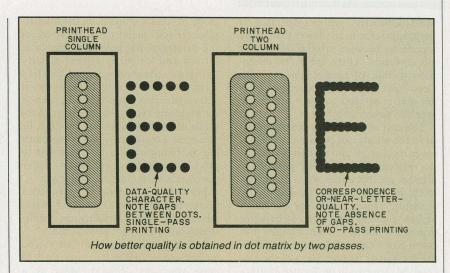

More recently, so-called "near-letter-quality" printing, in which printed characters have a more finished appearance, has been introduced. This level of printing quality can be achieved in either of two ways. In older model printers, it is obtained with a multiple-pass technique, each pass reducing the speed commensurately. For example, if four passes are required to achieve near-letter-quality printing in a 200-cps printer, speed will be only 50 cps. A more efficient technique is used in the newest printers, which have printheads with

two separate columns of print pins that permit high-density-dot printing in the two-pass mode, only halving the speed obtained with data-quality printing.

Other factors govern how fast a printer can operate, too. For example, defeating the bidirectional printing capability, now more or less standard in new dot-matrix printer introductions, wastes time in returning the printhead from the right margin to the left margin. Also, you should be aware that printing graphics isn't as fast as alphanumerics, punctuation, and special characters.

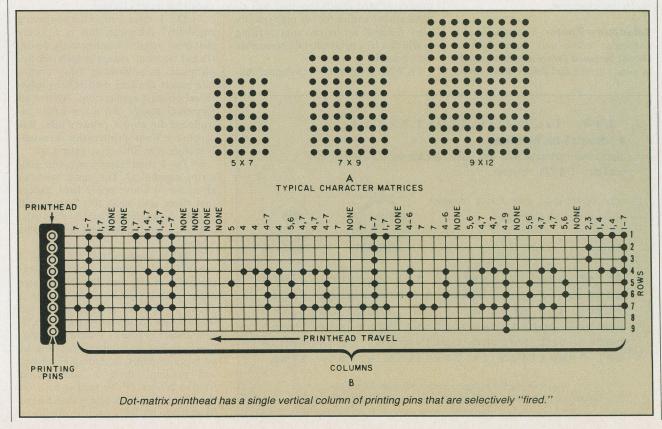

#### ...COMPUTER PRINTERS

Most dot-matrix printers operated in the graphics mode are slower than in the text mode because printing is in only one direction. There are a few exceptions to this, of course. For example, Centronics recently introduced a line of dot-matrix printers capable of printing graphics bidirectionally.)

The cost of a printer is directly related to the number of precision mechanical parts that go into its design. Oddly, the very complex electronic portions of printers are dirt cheap when compared to the high-precision metal and plastic elements. This accounts for the much higher demand for formed-character printers, which have a much higher precision-parts count than is required in the dot-matrix printer. Each of the mechanical elements in the formed-character printer must be machined to very close tolerances, at a very high cost.

In contrast, the dot-matrix printer is a relatively simple mechanical but complex electrical device. Its relatively few precision mechanical parts are contained in the printhead and linear head-positioning/track assembly. Considering that a much greater number of mechanical elements are used in the typical printing assembly of a formed-character printer than there are in an entire dot-matrix printer, it's not difficult to understand why the latter is so much less expensive.

**Selecting a Printer.** Your choice of a particular make and model printer should be based on an intelligent study of your current and future needs and a

study of what's available in the marketplace. If your major or exclusive use of the printer is for generating mailable letters and/or professional-quality printing, plan on a letter-quality formed-character printer. However, if you require fast printing speed, such as for regularly typing hundreds or thousands of mailing labels at one time, or you must keep hard copies of accounting and financial records, or you wish to print out graphics, etc., your better choice would be a dot-matrix printer.

For strictly home use, the dot-matrix printer is perhaps best because of its relatively low cost, versatility, and sufficient print quality for general use.

Let's detail the important factors you must consider when it comes time to make your buy decision. Make up a master list as follows:

- 1) Do I need letter-quality printing or will data- or correspondence-quality printing suffice? If your needs are exclusively for letter and report writing, plan on a formed-character printer; otherwise, specify a dot-matrix printer. Bear in mind the differences in print quality obtainable at different price levels. If you need high-quality legibility, note this alongside your dot-matrix entry. Remember, too, that a number of recently introduced dot-matrix printers are capable of generating near-letterquality printed characters that will almost always suffice for the high-quality copy required for letter/report writing in which a true professional appearance isn't essential.
  - 2) What is my printing volume? An-

swer "light" if your printing needs are infrequent and usually limited to 10 pages or less per session. For strictly nonprofessional home use, figure your printing volume to be light. Answer "moderate" for normal daily business office use in which 100 to, say, 300 letters, memos, and envelopes are to be printed daily. Answer "heavy" for more intensive use, as in daily printing out of large volumes of mailing labels and in word processing, where the printer will be going for 35% or more of the time in an eight-hour day.

3) What printing speed do I need? For occasional light printing volume, any printer capable of churning out copy at even the slowest speeds will suffice. For moderate volume, be conservative and note 75 cps or more. For heavy volume, plan on a minimum of 150 cps.

- 4) Do I need variable pitch? If you do, don't think you *must* spring for an expensive formed-character printer. Most dot-matrix printers offer selectable expanded, normal, and condensed characters, without having to change the printhead. This feature will frequently be enough to fill your printing needs. Also, some of the new computers that feature bit-addressable graphics capability will allow you to custom design and program in one or more user-callable character sets on a compressed or expanded matrix format.
- 5) Do I need proportional-spacing capability? Although this is a nicety that most users will instinctively desire, it's not essential, except in such rare applications as publishing, fancy corporate report drafting, and other professional printing applications. Almost all formed-character and a few newly introduced dot-matrix printers offer this capability. Those printers that do usually include it at little or no extra cost.
- 6) Do I need superscript and subscript capability? The same remarks given for 5) above apply here, except that those who need this feature will usually be mathematicians, scientists, engineers, and publishers and report writers.
- 7) What kind of paper feed do I need? If you're going to be printing exclusively on pin-feed fan-fold printer paper, ordinary pin-feed will do. But if you're going to be printing mainly on single sheets (called "cut-sheet paper"), your choice of printer should have friction feed. For most reliable printing on all types of paper, including envelopes and mailing labels, a combination friction/tractor (F/T) feed is best. In the past, this was an option that had to be added to the basic printer, usually at

IN DOUBLEWIDTH

doublestrike.

can be printed in an attractive propular PICA type.

graphics in the same international





After easily setting the proper values single page letters or multi-page into the printer and then collated quence continues automatically without paper-out switch activates or a manuaual insertion is possible at any time

At top are print samples from an Epson FX printer. Below is a near-letter-quality sample from a Centronics Model 353. high cost. However, more and more printer manufacturers are beginning to offer friction/tractor feed as a basic part of their products at no extra cost.

- 8) Do I need graphics capability? If your answer to this question is "yes," plan on restricting your choice to the dot-matrix printer category. Be aware that not all dot-matrix printers are capable of printing out everything that can be displayed on a computer's video display screen on a dot-for-dot basis. Some printers are able to print only the "block" graphics characters contained in preprogrammed ROMs inside the printers. Unless a manufacturer specifies that his product can print dot-addressable graphics, assume it can't.
- 9) Do I need alternate character sets? This question applies exclusively to dotmatrix printers, since all formed-character printers by nature of their interchangeable printwheels or thimbles are inherently capable of alternate character set selection. With dot-matrix printers, one doesn't pop out one head and replace it with another to obtain a different character set. Alternate character fonts must be obtained with the existing matrix head, using software, which may be in preprogrammed ROMs inside the machines themselves. Some of the newest dot-matrix printers on the market come standard with up to eight different character sets that can be selectively switched in and out as desired. Others have on-board sockets into which optional character-set ROMs can be plugged and called at will from software.

10) How much should I pay? This question usually tops the uninformed prospective buyer's list. In practical terms, it should be way down on the list, as it is here, because the answer will be based on the answers to all the preceding questions. It would be extremely foolhardy-and expensive-to let budgetary considerations overshadow your needs. Don't plunge in and choose an inexpensive printer that isn't capable of meeting all your current needs, much less leave room for growth, or an expensive full-featured printer with features you'll never use. Such a move will prove costly in the long run, since it won't be long before you have to trade up anyway. By the same token, buying a very fast full-featured printer with lots of bells and whistles you'll never use will prove costly right at the dealer's counter.

The best advice we can give for choosing a printer is: Select what you need. If you require a model that's too costly for your present budget, it's better to wait a

few months, socking away a few extra bucks until you have enough to buy the model that best suits your needs, than to make a hasty purchase that won't satisfy you.

For the business office, keep in mind that it's not necessary to buy a printer for each computing station, since it's a rarity for every station to require printouts at the same time. In fact, under ordinary data- and word-processing circumstances, a printer will be idle more than 75% of the time! Therefore, you can plan your printer purchases with station sharing in mind. You have two choices here. The simpler choice is to reserve one of the several stations for basically print-only operations. The alter-

Aa Gg Mm Zz

Formed and dot-matrix letters.

native is to have two or more computing stations *share* one printer, without having to install special—and expensive—multiple-user hardware and software. This latter approach is implemented by installing an optional switching box between the printer and sharing stations. Most such switching accessories offer print buffers, standard or optionally, to ensure efficient word/data processing.

With the first approach, the computer/printer station might be idle for long periods of time. The second approach is more practical because all stations can be active simultaneously for processing, and there's no need to have operator shuffling from one station to another.

Other Considerations. Printers connect into a computer in either of two ways: parallel (Centronics) or serial feed (RS232C). In most cases, the parallel interface is built into the printer, while the serial interface electronics is optional even though the printer has a plug-in facility on the back marked accordingly. Perversely, most computers come with a serial port, but require an optional parallel port to be added. Accordingly, the user will often have to spend extra money to get his printer up and running. Bit-parallel interfaces transfer data a word at a time, while bitserial runs bits one character at a time. Consequently, a parallel-interface setup is a speedier one.

Most printers contain 1K to 2K of

RAM buffer memory to store incoming data that's being received too fast for the printer to handle. Buffer memory can be expanded, of course, either by an external printer buffer or, in some cases, with an internal board, if you regularly dump a lot of copy from the computer to the printer.

All printers aren't alike, though most share many similar features. For example, low-cost impact dot-matrix printers often feature  $5 \times 7$  dot matrix. If it has a lower-case facility, the letters won't produce true descenders, so that the bottom of, say, the letter "g" will be in line with the bottom part of, say, the letter "b." Perhaps this is good enough for you, given the savings in money, but you should know what you're going to get in return.

Is the paper drive a friction or tractor type? The former uses roll paper that's less costly, while the latter will enable you to print accurately and automatically on a given sheet of fan-fold paper or on mailing labels. Some printers come with both facilities at no additional charge.

Among other considerations are: the paper width the printer can handle, number of copies it can make, paper "out" alarm, addressable tabbing, overall dimensions, compressed and expanded print, and dot-addressable graphics provisions.


No matter how sophisticated a printer you decide to buy, you'll need the proper software to take advantage of its specific features. In fact, if you're putting together a sophisticated word-processing system, review your needs with an eye to both printer and driving software.

If you select a printer that offers true underlining, superscripting and subscripting, proportional spacing, etc., capabilities, get a software package that will allow you to access these features. Don't forget that any feature you add to a basic printer or package will add to its cost, however; so plan your purchases accordingly. If you buy more printer than you need, you'll be throwing away money that can be better spent on something else you might want or need for your system.

Good high-level word-processing packages, such as Word Star and Magic Wand, will almost always permit you to take advantage of virtually every feature built into modern printers. Basic low-cost packages, however, may not. Before you buy a software package for your computer/printer system, carefully study its description to determine if it fills your needs. The several hundred

#### Microbuffer II Printer Interface for Apple II

By Alexander Marx

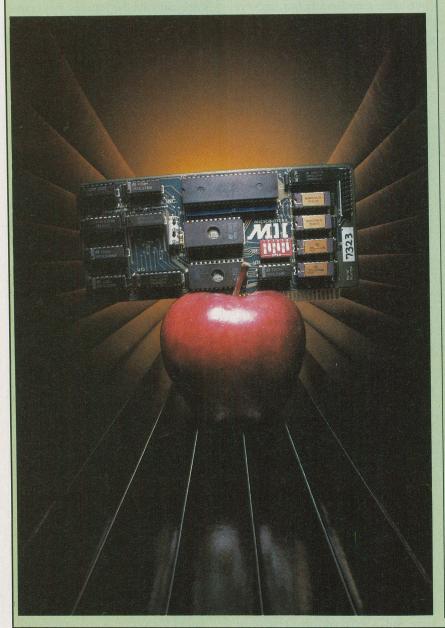

PRINTER operations are light years slower than any computer's flow of data. So when a computer is spitting out large amounts of data to a typical dot-matrix or daisy-wheel printer, you're forced to wait until everything is printed before you can work at the console again.

What a waste of time for both you and a sporadically idling CPU! What's the solution? It's simple: take some memory, an inexpensive microprocessor, some support logic, and make the whole thing look like a fast printer to the computer. The computer can now dump the data to this external memory at 4000 plus cps (characters per second) and the additional microprocessor can then send them to the printer at the slower rate. Put the whole thing in a box and you have yourself a printer buffer!

The clever people at Practical Peripherals (31245 La Baya Drive, Westlake Village, CA 91362) have done just that, and they have a line of buffers to fill every need. For the Apple II computer they have come up with the Microbuffer II, which at \$259 comes with 16K of onboard memory that is user-expandable to 32K. It also has an onboard microprocessor and an EPROM that contains the software to handle the buffering as well as some rather clever features. The whole thing is a plug-in card about twice as long as a normal Apple printer card.

The card tested was for a parallel "Centronics" interface. Even though it is a parallel interface it looks like a serial interface to the Apple. This is to maintain compatibility with both Pascal and CP/M. The card is installed like a normal Apple card. I placed it in slot 1 (although it can be used in any slot except 0). The card has a detachable cable with the standard parallel connector on one end and a standard Apple multipin connector on the other.

The card is transparent in operation if you don't want to do anything fancy. You notice the difference that the buffer makes right away: a standard screen full of data loads into the card in about two seconds as opposed to about a minute without the buffer. The card responds to the conventional commands. These

dollars asked for the software to provide professional printing capabilities will be well worth the investment since, in the long run, it can actually save you money in more efficient and flexible processing. Conversely, if you don't need all the sophistication built into professionalgrade software, find a package that suits your requirements. Such packages are usually sold at considerable savings over individual items.

Finally, like so much computer hardware, printer prices appear to be at an all-time low. Leading Edge's "Gorilla/Banana" impact dot-matrix printer, for example, has a suggested retail price of

only \$249.95. Models that have been around for a while are being sold with considerable discounts. An Epson MX-80, the machine that brought logic-seeking to moderately priced printers, can be bought for less than \$500, while Smith-Corona's TP-1 letter-quality daisy-wheel printer is being sold for below

are prefixed by sending a Control I [CHR\$(9) in BASIC], followed by one or more parameters. For example, to go from printing 40 to 80 columns, you would first turn the card on with the normal PR#1 and then enter a Control I followed by an 80N.

With 16K of memory, you can dump about 11 pages of text to the buffer. If you upgrade or purchase the 32K version, you will double the amount of storage. Once the buffer fills up and if you have more data to send, the system slows down to the normal crawl. As the card sends one line to the printer from the bottom of the buffer, a new line from the computer is entered at the top of the buffer.

You may wonder about the use of the card at this point since the system is bogged down waiting for the printer, just like the old days. But don't forget that the buffer is still full. At some point the computer will send all the data and be free once again, while the buffer continues to churn out the 16K or 32K that was filled. It may not be as fast as having unlimited buffer area, but it still saves a good one-third to one-half of the normal printing time. As I rarely print large documents, I get by very nicely with the 32K. Without reaching the buffer limit, you can save close to 90% of your printing time.

So much for the "dumb" mode of operation. If the card just buffered the printing it would be well worth the cost. But since you have a microprocessor on the card already, you may as well give it some smarts. This card has 25 text formatting and printer control commands, as well as eight graphics commands for dumping the Apple HiRes graphic screens to the printer.

Some of the text formatting and printer control commands are: send a linefeed after carriage return, set a left margin, set the print width, clear the buffer, and verify the operation of the card (self check). Among the more interesting commands is one to format BASIC listings so that each one of multiple statements on a line is displayed on its own line, indented from the margin. This is very useful if you do any pro-

gramming or would like to follow someone else's work. It takes a little time to get used to the format but, once you do, it makes life a lot easier.

Another useful command is a screen dump. This will dump the 40-column Apple text screen to the printer. You can print the whole screen or specify a starting line, in which case it will print from that line to the bottom. The manual specifies that this command is useful for printing a Visicalc window, but I couldn't figure out how to interrupt Visicalc so I could send the command code. The manual doesn't elaborate either. It's a shame that they allude to something and yet don't explain at all how to achieve the desired effect.

The HiRes graphic dump commands are a nice bonus. They allow you to dump HiRes Apple graphics to your printer, provided it can handle dot-addressable graphics. You must specify what printer you have when you purchase the card as each printer requires a different EPROM.

The graphic dump commands give you many options including printing double sized, rotating the image 90 degrees, inverting the image so black is white and white is black, and emphasized so that twice as many dots are printed giving a darker image. The card will print both the primary HiRes page (HGR) or the secondary HiRes page (HGR2). It even allows printing mixed HiRes and Text screen. An additional feature is the Chart Recorder Mode. This allows two pictures to be printed contiguously, resulting in a larger picture. This can allow for greater detail by using both of the Apple HiRes screens and joining them at print time.

The Microbuffer II is an excellent product. It serves its purpose as a buffer simply and elegantly. It follows the standard Apple commands for ease of use. It also offers many features not normally found in a printer card. If you have ever shopped for a printer card, you soon realize that there is too much variety in the marketplace. Some cards offer straight printing with no bells and whistles, some offer buffering, some offer graphics dump routines and little

else, some offer bells and whistles but are not compatible with anything.

The Microbuffer II offers the cake and the icing, too. In fact, I used the card for a long time as a straight buffer without having to modify any of my programs. I was oblivious to the other wonderful features. Now I use it more extensively, especially for formatting BASIC listings, with the left margin set where the text is comfortably centered on the page. No more moving the tractor feed to accommodate my word processor's spacing, while my BASIC listings are printing on the feed holes! And the graphics dumps are wonderful, convenient and versatile.

There are a few annoying things about the card, the worst being the manual. It is far from complete. It gives you enough to get started, but leaves you on your own for the rest. I am still trying to dump my Visicalc screens because it said I could, but I am not going to spend an hour trying to find out. The other complaint is a lack of a larger technical section. It has the standard "for machine language programmers, the following information will be useful," but what if I want to go deeper? For example, what if I wanted to access the graphic dump routines directly? At least, if you don't want to release source code, give entry points or even tips and examples.

For the dollar, though, I dont' think you could do better than this card. The combination of functions with the relative ease of use and compatibility make it unbeatable.

If you don't have an Apple II, but would still like buffered printing, one of Practical Peripherals' inline buffers may be the answer. These buffers go between the computer and printer and direct the flow from there. They offer several models in both serial and parallel interface and up to 256K of memory. That's about 175 pages of text! There's even a model that will fit inside the Epson printers.

So, if you are tired of waiting for your printer while you're computing, consider a buffer. And if you're considering a buffer, check out the Practical Peripherals' line.

\$600. And if these are beyond your budget, there's still no excuse for not having hard copy at your disposal because you can go the thermal printer route, such as with Star Micronics' new STX-80 80-column printer for under \$200 suggested retail. Moreover, new models are available that boast more features than

August 1983

ever, such as faster printing speed and they are available in most locations, at surprisingly moderate prices.

Some unusual concepts are around, too. These include, among others, Qume's "personality" modules for its daisy-wheel printers that simplify mating it with the most popular computers,

Riteman's 27%"-high 10"-wide-carriage impact dot-matrix printer that fits into an attache case, and Max and Mannesmann Tally's battleship-construction impact dot-matrix machines that allows one to set up a variety of characteristics from its front panel and store it in nonvolatile memory.



This series of articles is condensed from a forthcoming book, Soul of CP/M,\* by Mitchell Waite and Robert Lafore

Since beginning this series, we've been working our way deeper and deeper into what we call the "soul" of CP/M—the hidden part not usually visible to the casual user of this operating system. Now we're going to penetrate to the most hidden part of CP/M, the BIOS (Basic Input/Output System)! You could call BIOS the innermost soul of CP/M.

What is the BIOS? For BDOS to be able to execute its duties, it must at some point communicate with the actual physical devices (disk drives, video screen, keyboard, printer, etc.) connected to the computer. Since these peripherals can be from a variety of manufacturers and operate in different

ways, subroutines that drive them must be different for each piece of this equipment. This collection of the subroutines is what constitutes the BIOS. Each of these driver subroutines "drives" a particular peripheral device. When you change from one kind of printer to another, you must modify the printer driver in BIOS to be able to "speak" to the new printer.

Although the BIOS is at the innermost core in CP/M (Fig. 17), it has a direct connection with the outside world. In fact, it's the *only* part of CP/M that

can actually communicate with physical devices.

Now that you know where BIOS resides and what it does, let's explore how to modify a driver routine so that your CP/M can operate with a different printer. The techniques involved will also work for adding or changing other peripherals. Changes to the disk drives are considerably more complicated and should probably be left to the dealer unless you're a very ambitious (experienced) programmer.

Because every system uses different

\*Copyright © 1983 The Waite Group, Inc. All rights reserved. To be published in 1983 by Howard W. Sams & Co., 4300 W. 62 St., Indianapolis, IN 46206. Cat. No. 22030. Reproduced with permission of the publisher.

f you own a Timex Sinclair, a ZX81, or any other Sinclair computer, you've probably discovered that the big microcomputer magazines cover only the bigger computers. Where can you find helpful articles on the Sinclair? In Sync!

Sync is the one magazine that's written exclusively about Clive Sinclair's marvelous inventions, the Sinclair computers. And it's the one magazine to read if you want to get

more from your Sinclair.

You'll find program listings for games, helpful programming techniques, hardware upgrades, math and science programs, news of new products for the Sinclair-in short, everything you need to use and enjoy your Sinclair to the fullest.

In just two recent issues, for example, we covered:

- ☐ Putting a Reverse Character in a String
- ☐ How to Double Your Memory
- ☐ Least Squares Data Analysis With the ZX80/81
- ☐ Space Warp: A Graphics Space Game
- ☐ How to Reduce "Blank Screen Time'

- ☐ Storing Three-Letter Words in an Array
- ☐ Software Review: ZX Galaxians
- ☐ An Introduction to Expression Evaluation
- ☐ Short Programs Just for Fun
- ☐ The ZX81 Parser and User-Defined Commands
- ☐ Understanding Floating Point Arith-
- ☐ Handling Strings from Another Dimension
- ☐ Book Review: Understanding Your ZX81 ROM
- ☐ How to Add a Keyboard to Your Sin-
- ☐ Translating Other Basics: DEF on the ZX81
- ☐ Six Outer Space Games—With Program Listings
- ☐ Hardware Review: Sinclair ZX Spectrum High Resolution Color/Sound Computer

If you own a Sinclair microcomputer, Sync is the only computer magazine you really need. Subscribe now to Sync, and you can save up to 33%! Just complete and return the postage-paid reply card or the coupon

#### **SAVE UP TO 33%** ON SYNC!

CN 1986 · Morristown, NJ 07960

YES! Please send me Sync for:

- ☐ One year (6 issues) for \$12.97— I save 19%.
- ☐ Two years (12 issues) for \$22.97— I save 28%.
- Three years (18 issues) for \$31.97—I save 33%.


Savings based on full 1-year subscription price of \$16.

Mr. Mrs. Ms. (please print full name) 8H15 Address. City. Zip State

**CHECK ONE:** 

☐ Payment enclosed. ☐ Bill me later. Offer valid in U.S. and possessions only. Please allow 60 to 90 days for delivery of first issue.

**NEW SUBSCRIBERS ONLY** 

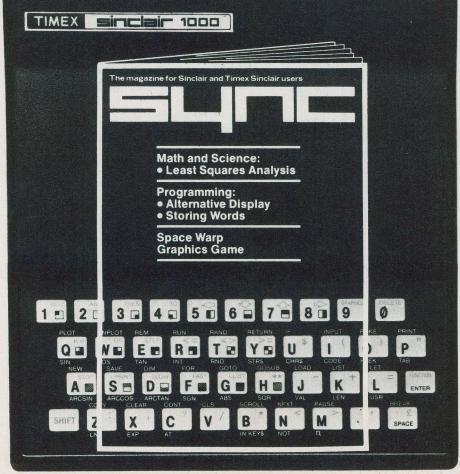

**FOR** SINCLAIR TIMEX SINCLAIR OWNERS


..CP/M

hardware, every BIOS will be different. We can't, therefore, tell you exactly how to modify your specific BIOS, but we can show you an example that can be used as a guide for modifying your BIOS to suit your system's needs.

There are three steps involved in writing a new BIOS driver: (1) learning your way around BIOS—you must be able to find the existing driver so you can see what it looks like, how it relates to the rest of BIOS, and where to put the new driver; (2) writing the new driver routine and then testing it; (3) inserting the new driver into the BIOS file and writing the new BIOS to the system tracks of your disk.

What You Need. There are two things you need before you can modify your BIOS. The first is the ASM file of the BIOS, usually supplied with CP/M, which contains the 8080 code that communicates with I/O devices. This file is usually called something like IOBIOS.ASM, GBBIOS.ASM, or some similar name with BIOS in it. If the file contains the I/O for the disk system, it will be very long—20 or more printed pages. If this section is left out, the printout will be fairly short—six pages or so.

The BIOS.ASM file is what you're going to modify, using a word-processing program to alter a section of it.

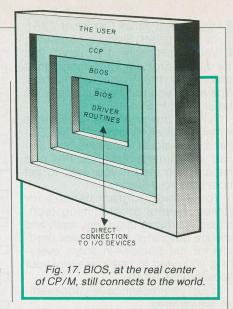

						E Lya
įT	TITLE	+ + BIOS FO	R D10 WITH	CP/N	12.2 Rev2.7 + +	
mis amins L	********	********	DN 2.7:SINGL DOUB	E DEN	NSITY, 128 B/S ENSITY, 256 B/S	DE8
0038 = M 0036 = S	MSIZE SSIZE REVNUM CPMREV "E	EQU EQU EQU EQU BIAS'' IS ADDR YSTEMS OTH	NOT FALSE 56 ;MEMO MSIZE-2;2K 27 ;BIC 22 ;CP/ RESS OFFSE IER THAN 16	S REV /M RE T FRO K (RE	V # :V # OM 3400H FOR MEMORY	DE8 DE9 DE9 DE9 DE9
BC00 = ;	BIAS				;ADDR OFFSET FROM 3400 (20K SYSTEM) ;BASE OF CCP ;BASE OF BDOS ;BASE OF BIOS	DE9 DE9 DE9 DEA DEA
		USEFUL THI MPU-B STAT	NGS TO KNO	 W	********	CON DEA DEA
		2 = TxE		RECE	EIVER READY NSMITTER EMPTY	DEA DEA DEE
		4 = OE 5 = FE	г	OVER FRAM SYNO	RRUN ERROR MING ERROR D DETECT	DEE DEE
				13	3 OR 4 = SERIAL = SYSTÉM	DEE DEE
				12	2 OR 4 = SERIAL = SYSTEM	LIST
0003 = 00002 = 00015 = II 0014 = II F803 = V	CRTST CRTDATA KBST KBDATA //ODATA	EQU EQU EQU EQU	3H 2H 15H 14H OF803H		DT DATA DODT	DEC DEC DEC
0003 = ; F800 = V	OBYTE		0003H 0F800H	); 11; V:	CONSOLE STATUS  READY BIT (RXRDY)  NTEL I/O BYTE  YO INIT ENTRY POINT	DEE
0023 = F	PRTS	EQU EQU EQU	0FFFDH 23H 22H	;P	PRINTER STATUS PORT	PUN DEC
						DEC
	NITIO:	JMP	INITVC	70H		DEC
DE76 C3B3DE L DE79 C388DE C DE7C C39BDE C DE7F C3A7DE C DE82 C3CBDE F DE85 C3D7DE F	LISTST: CONST: CONIN: CONOUT: PUNCH: READER:	JMP JMP JMP JMP JMP JMP	CONOUTION	C		REA DEC DEC DEC
Fig.	18. BIOS	6 for DIO	with CP/N	1 2.2	, Rev. 2.7.	DE
	0000 = FFFD = FFFD = 10038 = 1	0000 = FALSE FFFF = MSIZE 0038 = MSIZE 0036 = SSIZE 0018 = REVNUM 0016 = CPMREV  SS TH  8800 = BIAS  BC00 = CCP C406 = BDOS D200 = BIOS  CONSOLE S  CONSOL	BIOS FOR IM	BIOS FOR IMSAI D10-C C	BIOS FOR IMSAI D10-C CONTE	BIOS FOR IMSAI D10-C CONTROLLER WITH CP/M 2.2

i smome u	CONSOLE STATU	S - CON:
CONSTIO: DE88 CD8FDE DE8B C8 DE8C 3EFF DE8E C9	CALL CONS RZ MVI A,0FFH RET	GETS STAT OF SPECIFIC DEVICE FIF NOT READY RETURN 0 IN A ELSE RETURN FF Z FLAG SET CORRESPONDINGLY
DE8F CDE3DE CONS: DE92 01 DE93 45DF DE95 45DF DE97 45DF DE99 5FDF	CALL DISPATCH DB 1 DW CRTSTAT DW CRTSTAT DW CRTSTAT DW IKBSTAT	;USE IOBYTE BITS 1-0 ;00 - TTY: (CRT STATUS) ;01 - CRT: " ;10 - BAT: " ;11 - UC1: (IKB1 STATUS)
; CONINIO:	CONSOLE IN - CO	N:
DE9B CDE3DE DE9E 01 DE9F 4ADF DEA1 4ADF DEA3 4ADF DEA5 64DF	CALL DISPATCH DB 1 DW CRTIN DW CRTIN DW CRTIN DW CRTIN DW IKBIN	;USE IOBYTE BITS 1-0 ;00 - TTY: (CRT INPUT) ;01 - CRT: " ;10 - BAT: " ;11 - UC1: (IKB1 INPUT)
CONOLITIO	CONSOLE OUT -	CON:
CONOUTIO: DEA7 CDE3DE DEAA 01 DEAB 55DF DEAD 55DF DEAF 55DF DEBI 6FDF	CALL DISPATCH DB 1 DW CRTOUT DW CRTOUT DW CRTOUT DW VIOOUT	;USE IOBYTE BITS 1-0 ;00 - TTY: (CRT OUTPUT) ;01 - CRT: (CRT OUTPUT) ;10 - BAT: (CRT OUTPUT) ;11 - UC1: (VIO OUTPUT)
	LIST STATUS - LS	ST:
LISTSTIO: DEB3 CDE3DE DEB6 03 DEB7 42DF DEB9 42DF DEBB 42DF	CALL DISPATCH DB 3 DW LISTSTC DW LISTSTC DW LISTSTC	;USE IOBYTE BITS 7-6 ;00 - TTY: (CRT OUTPUT) ;01 - CRT: (CRT OUTPUT) ;10 - LPT: (LINE PTR
DEBD 42DF	DW LISTSTC	OUTPUT) ;11 - UL1: (VIO OUTPUT)
	LIST OUT - LST:	100
LISTIO: DEBF CDE3DE DEC2 03 DEC3 55DF DEC5 55DF DEC7 35DF	CALL DISPATCH DB 3 DW CRTOUT DW CRTOUT DW LPTOUT	;USE IOBYTE BITS 7-6 ;00 - TTY; (CRT OUTPUT) ;01 - CRT; (CRT OUTPUT) ;10 - LPT; (LINE PTR
DEB9 6FDF	DW VIOOUT	OUTPUT) ;11 - UL1: (VIDEO
	PUNCH OUT - PU	OUTPUT) N:
PUNCHIO: DECB CDE3DE DECE 05 DECF 55DF DED1 73DF	CALL DISPATCH DB 5 DW CRTOUT DW PUNOUT	;USE IOBYTE BITS 5-4 ;00 - TTY; (CRT OUTPUT) ;01 - PTP; (H. S. PUNCH
DED3 6FDF DED5 55DF	DW VIOOUT DW CRTOUT	OUTPUT) ;10 - UP1: (VIO OUTPUT) ;11 - UP2: (CRT OUTPUT)
	READER IN - RDI	
READERIO: DED7 CDE3DE DEDA 07 DEDB 4ADF DEDD 74DF	CALL DISPATCH DB 7 DW CRTIN DW RDRIN	;USE IOBYTE BITS 3-2 ;00 - TTY: (CRT INPUT) ;01 - PTR: (H. S. READER INPUT)
DEDF 4ADF DEE1 4ADF	DW CRTIN DW CRTIN	;10 - UR1: (CRT INPUT) ;11 - UR2: (CRT INPUT)

You'll then reassemble it with ASM and write it back onto the system tracks of your disk.

The second thing you'll need is the specifications table for your UART (universal asynchronous receiver/transmitter) or serial I/O board. The UART IC is installed on the serial board and allows the computer to communicate in serial mode with external devices. The spec sheet for the UART will tell you what numbers to output to what "port" in the UART to send signals to various I/O devices.

Some versions of the BIOS.ASM file include information on the UART at the beginning of the listing, making it

possible to modify your BIOS without the actual spec sheet—provided the UART is already installed and operating and your listing has this information. It's also easier if you have a device already operating which is similar to the one you plan to install.

If you already have a printer running and want to change to another printer, you may not need the spec sheet or comments in the listing. You can use the existing driver as a model. Of course, if you don't have a printer, you'll need the spec sheet.

**Sample BIOS.** Bear in mind that the particular BIOS we'll be describing in

Fig. 18 is only one example of the hundreds of possible versions in circulation. Yours may be somewhat different, but it should be similar enough that you can follow in your BIOS the steps we'll describe here. Reading your BIOS listing will make the most sense if you assemble it with ASM and then refer to the PRN listing, since often the hex values given are important.

**BIOS Introduces Itself.** When called from disk, BIOS introduces itself, as shown in the beginning of the BIOS listing in Fig. 18. BIOS starts out by describing itself, where it comes from, and what it's for. Our example comes from

	SPATCH:							T STATUS (FF IF	DEADY ELSE O
DEE3 E3		XTHL		;SAVE CALLER'S H, GET TABLE ADD		******	*******	******	HEADY, ELSE 0)
DEE4 56		MOV D.M		;SHIFT COUNT		LISTSTC:	MVI	A,0FFH	
DEE5 23		INX H		POINT TABLE	DF44 C9		RET		
DEE6 3A0300		LDA IOBYTE		GET IO ASSIGNMENTS				TATUS RETURNE	
DEE9 07 DS	SHFT:	RLC		BYTE				******	
DEEA 15	JI I I .	DCR D				CRTSTAT:			
DEEB C2E9DE		JNZ DSHFT		SHIFT TO POSITION	DF45 DB03		IN	CRTST	;STATUS PORT ;TEST RxRDY
		****		BITS	DF47 E602 DF49 C9		ANI RET	RXRDY	;Z=1, CHAR NO
DEEE E606 DEF0 5F		ANI 06H MOV E.A		;MASK BITS :D ALREADY CLEAR	DI 43 03				READY
DEF1 19		DAD D		INDEX INTO TABLE		1			******
DEF2 7E		MOV A,M					CONSOLE II	RETURNS THE	CHARACTER IN A
DEF3 23		INXH		;TABLE WORD TO HL		CRTIN:			
DEF4 66 DEF5 6F		MOV H,M MOV L,A			DF4A CD45DF	OITTIN.	CALL	CRTSTAT	
DEF6 E3			PUT ADDR OF	ROUTINE, GET CALLER'S	DF4D CA4ADF		JZ IN	CRTIN	;GET RxRDY
			Н		DF50 DB02				GET CHAR
DEF7 C9		RET	GO TO ROUT	INE	DF52 E67F DF54 C9		ANI RET	7FH	;STRIP PARITY
100	*******	********	********	******	DI 07 00	. ********	******	******	*******
	INITU	JSER I/O IE. C	ONSOLE ,PUN	CH AND LIST DEV.			CRTOUT SE	NDS THE CHARA	ACTER IN C TO OUTPUT
		**********	*********	*******		CRTOUT:	********	**********	***************
II.	NITVC:	INIT HART	RECOMMENDS	ED CMDS BY IMSAI)	DF55 DB03	Childui:	IN	CRTST	GET STATUS
DEF8 AF			A	EB CIVIDO BY IIVICALI)	DF57 OF		RRC		;TxRDY?
DEF9 D303		OUT	CRTST		DF58 D255DF		JNC	CRTOUT	REPEAT, NOT READY
DEFB D303		OUT	CRTST		DF5B 79 DF5C D302		IVIOV	A.C	;CHAR TO ACCUM ;CHAR TO PORT
DEFD D303 DEFF D323		OUT	CRTST PRTS		DF5E C9		BET		
DF01 D323		OUT	PRTS			,			*******
DF03 D323		OUT	PRTS			;	IKB1 STATU	S RETURNED IN	Α.
DF05 3E40		MVI	A,40H	;RST 8251		IKBSTAT:			
DF07 D303 DF09 D323		OUT	CRTST		DF5F DB15	IKBOTAT.	IN	IKBST	;STATUS PORT
DF0B 3EAE		MVI	A,OAEH	;MODE	DF61 E602		ANI	RXRDY	;TEST RxRDY
DF0D D303		OUT	CRTST		DF63 C9		RET		;Z=1, CHAR N
DF0F D323		OUT	PRTS	:CMD		. *******	******	*******	READY
DF11 3E27 DF13 D303		MVI	A,27H CRTST	;CMD	Av.		IKB1 IN RET	URNS THE CHAP	RACTER IN A
DF15 D323		OUT	PRTS			; ********	********	**********	*********
			1	MO ID 4 ADDD	DF64 CD5FDF	IKBIN:	CALL	IKBSTAT	
DF17 21FDFF DF1A 3E56		LXI MVI	H,VIOID A,'V'	;VIO ID 1 ADDR ;1ST ID	DF67 CA64DF		CALL JZ IN ANI	IKBIN	;GET RxRDY
DF1C BE		CMP	M	;SAME?	DF6A DB14		IN	IKBDATA	GET CHAR STRIP PARITY
DF1D C22FDF	INZ	NOVIO			DF6C E67F DF6E C9		DET		
DF20 23		INX	H	;VIO ID 2 ADDR ;2ND ID	DI OL CO	1	*******		*******
DF21 3E49 DF23 BE		MVI CMP	A,'I'	;SAME?	7			NDS THE CHARA	CTER IN C TO VIO
DF24 C22FDF	JNZ	NOVIO				VIOOUT:			
DF27 CD00F8		CALL	VIOINIT	;INIT VIO	DF6F 79	V10001:	MOV	A,C	
DF2A 3E97	IMD	MVI INITIO1	A,97H	;VIO AS OUTPUT	DF70 C303F8		JMP	VIODATA	;VIO RETURNS
DF2C C331DF 3	NOVIO:	MVI	A,94H	;CRT AS OUTPUT		. ******	*******	******	CALLER
	NITIO1:							ARACTER IN REG	
DF31 320300		STA	IOBYTE			******	*******	******	******
DF34 C9		RET			DE70 00	PUNOUT:			:NULL ROUTINE
				**********	DF73 C9	. ******	RET	*****	,INULL HOUTINE
	. *******	LIST CHARAC	TERINC	******			READ CHA	RACTER INTO A	FROM READER DEVICE
DF35 DB23	LPTOUT:		PRTS	CHECK STATUS PORT		; *******	********	**********	***************
DF37 E685		ANI	85H	CHECK BOTH READY	DF74 3E1A.	RDRIN:	MVI	A,1AH	ENTER END OF FILE
5500 5500		VDI	OELL	BITS	DI 74 OLIA.	;			(REPLACE LATER)
DF39 EE85 DF3B C235DF		XRI JNZ	85H LPTOUT		DF76 E67F		ANI	7FH	;REMEMBER TO
DF3E 79		MOV	A,C		DE70 00	5	RET		STRIP PARITY BIT
DF3F D322		OUT	PRT		DF78 C9 DF79		END		
DF41 C9		RET	USER PRIN	TER IO	DE19		LIVE		

## TIMEX/SINCLAIR PRODUCT DIRECTORY

		Cassette signal	Connectors	Hardware, Power	Hardware, repeat in	Hardware, Sound	Hardware, video	Interface, misc.	Interface, analog	Interface paraller	Interface C	Joystick	Keyboard	Keyboard	Memory RA	Memory DO	Memory.	Modem	Monitors	Printers	Software	Software	Software	Software.	Software,	Software, home	Supplies, casserr	Supplies, misc	Service / repair	Books maga-
	Aardvark-80 2352 S. Commerce Walled Lake, MI 48088														17 LF				1	cies			•			PI (T)				
2	Aerco Box 18093 Austin, Texas 78760		•				•		•	•								£	Consideration		•					•	60			
3	Apropos Technology 350 N. Lantana Ave, Ste. 821 Camarillo, CA 93010													54	•								•	•		in.				
4	B. Dalton Bookseller 7505 Metro Blvd.																	ā												•
	Minneapolis, MN 55435  Bob Berch 19 Jacques St.															•										•				
6	Rochester, NY 14620 Brainchild Computer Works P.O. Box 506 Pewaukee, WI 53072																		ê A				•	•						
7	Byte Bak c/o Minchey Enterprises, Rt. 3, Bx. 147 Brodie Rd., Leesville, SC 29070		ilei						21		•	ALE	•		•			•		•	•									
8	C-20 Magazine P.O. Box 3801 Wichita, KS 67201																Nipus Nipus													•
q	Cleva Computer Ware 92 Wyckoff St. Brooklyn, NY 11201				9 - A							alsa 8											•			•				
111	Cobra Tech 378 Caledmar Rd. London, N1 10Y England								1000	•	•				TITLE			•		100										
	Compusoff Publishing 535 Broadway El Cajon, CA 92021		137												21															•
12	Computer Continuum 301 16th Ave. San Francisco, CA 94118		•				•	•													•	١		•		•		•		
13	Cottage-Technology 5720 W. Little York, Suite 178 Houston, Tx 77091				•		•														•					10				
14	Data Assette 52 S. 3rd St. Oxford, PA 19363			•			•			•	•		•	•	•	•			A		•	•	•			•				
15	Down East Computers Box 3096 Greenville, NC 27834	•						•									•						İ							
16	Eagle Sales/Mindware P.O. Box 784 Cambridge, MA 02238										Ray A									•	•	•	•			•				
17	Expense Cutter Products P.O. Box 9534 Raytown, MO 64153						•	le a					le de la constante de la const		Mark.				i wan	NA.	TEN			11.0						
	E.Z. Key Suite 75, 7111 Southern Artery Quincey, MA 02169						i					•	•								Tiag XX							•	N.	
19	Filesixty 25 Chippenham Mews London W9 2AN England												•								E Life									
	Fuller Micro Systems The ZX Centre, Sweeting St. Liverpool 2 England		8.	•		•							•					-161												
21	GCM Electronics P.O. Box 6152 Ft. Smith, AR 72906						•										Š													
	Graphicomp 55 York St., Suite 100 Toronto, Ontario, Canada M5 J 1R7	in Pini		gal .																	•	•	•			•				
	Heath Computer Services 950 E. 52 South Greentown, IN 46936											F-1		city				H SH			•	•			•		•			
24	Hunter 1630 Forest Hills Dr. Okemos, MI 48864			17.1													•							5,41						1
25	Intercomputer Box 90, Prudential Center Boston, MA 02199		•				•												id.								•	•		
26	Jameco 1355 Shoreway Rd. Bellmont, CA 94002						7.9				i		•	•	•			1610 3612		•	•	•	•	49			A Sul			
27	Kartes Video Communications, Inc. Computers & Peripherals Div. 10 East 106th, Indianapolis, IN 46280									•			•		•						•	•	•		•					
28	Kopak Creations Dept, Sy-448 West 55th St. New York, NY 10019	•	•			•	•	167	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	!	
29	Leading Edge 225 Turnpike Street Canton, MA 02021								•	all selections									•	•										7
30	Marantha P.O. Box 759 Mableton, GA 30059							Ţ											12				•							
31	Melbourne House 333 E. 46th St. New York, NY 10017																													
32	Memotech 7550 W. Yale Ave., Suite 200 Denver, CO 80227		•							•	•		•		•					•	•	-710		•		•				
33	Microsync Box 2015, 60 Foundry St. Keene, NH 03431																									1				

		the signal	ctors	are	Hardware repeat	are Sour	Hardware With	Hardwar	Interface misc	ce, analo	Interface.	/ Printer	ce, serial	¥ / 1	Keyboa	Memory Coverie	Y. HAM	Memory. ROM	latile			٥	SS	ional re.	inment re,	Sign	al home	Supplies	S. Air	Service/repair	Books/magazin
		Sasse	9	Tardy Doug	Hardwe	Jardw Genera	Hardw	Tardw	nterfa	nterfa	are fa	Interface	Joystict	Keyboard	(eyb)	Memor	Memor	Memor	Modern	Monitor	Printers	Offwa	Offwa	Offwa	oftwa	Offwa	Offwa	upplie	Supplies	Brvice	ooks/
34	Orbyte Software The Creative Force P.O. Box 948, Waterbury, CT, 06720										1 4		,		-	~	<	140	4	/ <	14	•	•	0	000	•	0 3	\o \cdot	S	05	80
35	<b>Panda Software</b> 51 Elgin St., Shelton Stoke-on-Trent, ST4 2RD England														HA S								•	•			•	(dis)			
36	Peak P.O. Box 8005, Suite 231 Boulder, CO 80306-8005																					•		•			•				
37	Pleasantrees 7760 N. Hopdown Tucson, AZ 85741														7							7	•	•			•		•		•
38	Ramex International P.O. Box 50 Utica, MI 48087			•			•	•			•	•		•		•					•	•	•	•			•				
00	Robotec, Inc. P.O. Box 55 Rossford, Ohio 43460							,														•		•		•	•				
40	Simplex Software 55 Sutter St., Suite 623 San Francisco, CA 94104																	1				•	•	•			•				
41	Sinclair Place 16840 N.E. 190th St. Woodinville, WA 98072			•	•		•	•	•		•	•		•		•	•				•	•			3.80		•				
42	Sinware Box 323 Dixon, NM 87527																								•		•				
	Softsync, Inc. PO. Box 480, Murray Hill Station New York, NY 10156																	輸	usens			•		•	- SELV	•	•				
44	PO. Box 1144 Piscataway, NJ 08854																					•	•								
45	Strategem Cybernetics 286 Corbin Place 2E Brooklyn, NY 11235												5	J								SA,	•	•							
	Suntronics 12621 Crenshaw Blvd Hawthorne, CA 90250								THE STATE OF					•		•															
47	Sync Master Route 1, Box 122 Oak Ridge, NC 27310						LUE I		204					•								•	•				•				
48	Sync Ware Co. PO. Box 5177 El Monte, CA 91734							¥						•		li de					•		•	•							
49	Synergistic Design Box 411023 Chicago, IL 60641									•				•																	
50	Timeworks P.O. Box 321 Deerfield, IL 60015							•							5-7	H							•	•		•			•		
51	21st Century 6813 Polk St. Guttenberg, NJ 07093							•		•				•		•					•	•		•		•	•				
52	Ultimate Blackwood P.O. Box 7427 Santa Cruz, CA 95061						( ii)	9753			10														1		•				•
53	York-10 Computerware 24573 Kittridge St., Dept. S-4 Canoga Park, CA 91307															Ne s						Silk.	10-					•	•		
54	Zehra Systems Inc					•	2178	•			los.		•	•		A				•		b	18 19			la.		19.50			
55	Bytesize Micro Technology P.O. Box 21123 Seattle, WA 98111	•		di.			277	M	a.v.							12/1										W.		31			
56	F Arthur Brown Co.		12) 1			•						•	61			•				•	Files	•	3844	•	1967		SIR!		•		
	, 1911 00000																														

#### **INSTRUCTIONS:**

This Product Directory will help you locate manufacturers and suppliers of Timex/Sinclair products and services. If you would like further information, please fill in the coupon completely and circle the number corresponding to the company(s) you would like more information from.

Mail to:


Sync Magazine One Park Avenue New York, N.Y. 10016

#### **SYNC MAGAZINE**

One Park Avenue, New York, N.Y. 10016 Name. Occupation\_ Title\_ Company Name. Address. City\_ State Zip. 1. How many microcomputer(s) do you own? D. 3 Or More A. None C. 2 B. 🗌 1 2. Which Brands? (Check all that apply) D. Commodore/PET G. Heath/Zenith H. Osborne A. | IBM B. [ E. Texas Instruments Atari C. Radio Shack/Tandy/ Other (please specify) Digital Equipment/ **TRS 80** DEC I would like more information on the following companies: 9 10 11 12 13 14 15 16 17 18 19 20 2 3 4 5 6 7 8

21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 WW Components, is for the Imsai 8080 computer, and is Version 2.7.

Address Location Arithmetic. All BIOS listings contain some calculations at the outset that define and set up the beginning address of BIOS in memory. Addresses are usually calculated according to a set of rules laid down by Digital Research. They start out by specifying the memory size with which BIOS is working, which is 56K in our example in Fig. 18. If your BIOS has other statements in it at this point, such as various options that must be set to true or false, ignore them; they won't influence this discussion.



The magic "N"

In Fig. 18, we see that MSIZE (computer's memory size) is set at 56 (28H). All BIOS.ASM files should have such an equate (EQU). If you want to change your BIOS to work with a machine with a different memory size, the first thing you would do is change this number to a value that will permit you to take advantage of maximum available memory.

The next important number is for BIAS. (In other listings, it may have a different name, such as IOBIAS.) This number specifies the distance in memory between where the CP/M system is on your system and where it is on a CP/M disk as it comes from the factory. A brand new system is configured for 20K of memory and then moved up to the top of memory, where it will reside in a particular computer. BIAS is related to a certain "magic" number, which we call N.

BIAS is then used to define the starting locations of the major parts of the CP/M system (CCP, BDOS, and BIOS). Location 3400 is the "standard" starting point for the bottom of CCP in a 20K system. CCP is 806H bytes long in our listing, since BDOS starts at CCP + 806H. CCP and BDOS together are 1600H bytes long; so in our 56K system, at least, BIOS starts at D200H.

I/O Equates and More. In the next section of the listing, headed "I/O Definition Equates," BIOS tells us something about the UART, namely the meaning of each bit when we read the status of an I/O device. Following this is a series of equates, which are places where certain variables and addresses in BIOS are given values. The CRT status port (CRTST) is at 03H, keyboard data port is at 14H, etc. Notice especially the printer status (PRTST) and printer data (PRT) ports. We'll be using the numbers they're equated to (23H and 22H) when we write our printer driver.

**ORG Statement & Jump Table.** In the next section of the listing, "User Customized I/O Devices," we finally get to the ORG statement, which is the beginning of our program. Usually, this location is defined in terms of various other locations that are, in turn, defined in terms of the computer's memory size, among other things. In this case, ORG is at the beginning of BIOS because all disk system drivers are located there, between D200H and D200H + 0C70H. Our listing is really only a small portion of BIOS, since it contains no disk information.

If we add instructions to BIOS and reassemble it to insert our new driver, the starting addresses of all drivers following the one we changed will be different. How will BDOS find them? The answer is that it makes use of a clever programming tool called a "jump table."

A jump table is merely a number of jumps at the beginning of the listing. Each jump goes to one of the driver routines. Since these jumps are part of the listing we're going to reassemble, the values in their address fields will change when we reassemble the file. So BIOS doesn't care about the locations of the driver routines themselves, only where the jump table is located. The jump table is always at the beginning of the listing. BIOS calls one of the locations in the jump table, and the jump takes BDOS to the proper driver.

Notice, however, that BDOS assumes the jumps in the table will always be in the same order. When it calls on the second jump in the table, it expects to find the jump to LISTIO, *not* some other driver. This is why the listing has the caution "Do not rearrange jump table" in it.

**IOBYTE.** Now we can actually start to follow a trail through the listing to our destination. The second jump in the table is to LISTIO, the list device. CP/M

permits different physical devices to be assigned to different logical devices—console (CON:), reader (RDR:), punch (PUN:), and list (LST:). There are also various physical devices like TTY:, CRT:, and LPT:. You can change the assignments of physical to logical devices by using STAT. When you do this, STAT changes the IOBYTE at location 3 in memory.

Now, when BIOS gets a call to the LIST routine, it doesn't know what physical device it's intended for until it checks the IOBYTE. Based on what it finds there, it will go to either the driver for the printer or to some other driver. That's why LISTIO and LISTSTIO (the latter being list status I/O) are a different form of jump table, rather than driver routines (see "List Out - LST" entry under "User Customized I/O Devices" in Fig. 18).

This section first calls the DIS-PATCH routine, which looks at the IOBYTE and determines which of the four routines to go to for the four possible physical I/O devices. Because the line printer is usually assigned to the LST: device, DISPATCH determines this from the IOBYTE and jumps to the address in the third DW statement in this routine—LPTOUT (line printer output).

In some BIOS versions, the IOBYTE isn't used and this section of code is omitted. This is true of the BIOS example provided in the "CP/M Alteration Guide" supplied by Digital Research. In other versions, it's implemented in a different manner.

Refer now to the section of Fig. 18 titled "List Character In C," which takes us to LPTOUT. We've found the instructions that tell the UART to accept a character and send it on to the printer. This is the routine we're going to modify. For a change, it doesn't call another routine. So we've reached the end of the line. Printer status (PRTS) at 23H and printer (PRT) at 22H are the "ports" we're going to access with IN and OUT instructions.

IN and OUT Instructions. These are the chief means by which the 8080 microprocessor communicates with the outside world. IN gets data from a port and puts it in register A, while OUT sends data from register A to a data port. Of the 256 possible data ports, the appropriate one is specified by the two-digit hex number (or label equated to it) in the address field.

Data ports and their addresses are *not* the same as memory and its addresses. Data ports consist of a separate group of registers. Since there are only 256 of

them, the ports are addressed by twodigit numbers. Thus, the 5A in the instruction "IN 5A" refers to a data port, not to memory address 5A.

The byte read into register A can be either data, such as an A character (41H) read from the keyboard, or a "status byte" whose purpose is to inform your program about the status of a UART or I/O device. The values of a status byte must be known from the operator's manual for the UART or I/O device.

OUT takes an 8-bit byte from register A and puts it into the port specified in the operand field of the instruction. This byte can be either data to be transferred to an output device, such as the character A to be printed on the CRT screen, or a "function byte" that tells the UART or I/O device what to do. The values to be used in a function byte must be known from the operator's manual for the UART or I/O device.

XRI Instruction. This instruction performs an exclusive-OR of the one-byte data in the instructions with the data in register A. This instruction is useful for testing bit patterns because it immediately tells you if all bits in a certain bit configuration are set to 1. Simply XRI the bit pattern you want to examine with the bit pattern in register A. If all the bits you specify are set, but nothing else is, the result will be zero. For example, if register A contains 07H and you XRI it with 85H, you'll have:

register A	0000	0111
constant	1000	0101
result	1000	0010.

The result is not zero. However, if register A contains 85H, you'll get:

register A	1000 0101
constant	1000 0101
result	0000 0000.

Note that the result is now zero.

The first thing we do in LPOUT is read the status of the printer port to see if the printer is ready to receive data. We do this with an IN instruction to the port that holds the printer status (23H), which returns a byte that looks like that shown in Fig. 19.

Now, what we want to see when the printer is ready to receive a character is that DSR, TxE, and TxRDY bits are set. The other bits can be anything at all. We first mask off the other bits with an ANI instruction, using 85H (1000 0101 binary). As a result, only bits 7, 2, and 0 can have a value other than zero; these bits can either be zero or one. The values

August 1983

of all of the other bits must be zero.

Next, we want to make sure that bits 7, 2, and 0 are indeed zero. So we XRI register A with 85H again. If the result is not zero, we go back to check again with the JNZ instruction.

Once all bits are properly set in the status word, we're ready to receive data. The data byte has been in register C all along (your program put it there before doing a call to BDOS). So we move it to register A and then OUT it to printer port 22H. Then we return.

I/O Initialization. Usually, the particular UART you're using must be initialized before it can function properly. Thus, there's a section of code in BIOS that's activated every time you do a warm or cold boot. This routine is shown in Fig. 18 under the heading "Init User I/O IE. Console, Punch and List Dev."

Different UARTs require different kinds of initialization. You can find out what yours requires from its spec sheet. In our example, the UART must be told "0, 0, 0, 40, AE, 27" before it can do anything. Examining the listing, you'll note that every time an OUTCRTST is executed, the value in register A is sent to the CRT status register (3H). Also, every time an OUT PRTS is executed, the value is sent to the printer status port (23H). Hence, the sequence of numbers referred to above is sent to both the CRT and printer ports of the UART.

If you're changing from one printer to another, you probably won't have to add anything to this initialization process. But if you add a driver that wasn't originally there, you'll have to add code in this section to initialize the new ports in your UART.

Modifying a Printer Driver. To create a new driver for your BIOS, you must first determine the kind of driver program to write. You must know what kind of printer you have and which communication "protocol" it uses. Protocol is another term for procedure. In this case, it means the procedure by which the printer tells the computer it's


ready to accept data for printing.

With some printers, you can simply wait until they're ready, throw a character at them, wait for ready again, throw another character, and repeat until you're done. Such a printer will print each character just fine. The printers made by Epson are typical examples of such "standard serial" or "teletypelike" printers. Other more complex printers, such as the daisy-wheel models, require one of two advanced protocols: "xon/xoff" or "etx/ack." The NEC printer, for example, requires etx/ack, while the Diablo 630 likes xon/xoff. These protocols are designed to allow a printer to work with more than one character at a time.

XON/XOFF Protocol. You've probably used xon/xoff without even knowing it. Xon/xoff is the same as the "control-s/control-q" (ctrl-s/ctrl-q) CP/M uses to freeze and unfreeze the scrolling of the display on the CRT screen. In CP/M, ctrl-s freezes the display; striking any key thereafter generates a ctrl-q that unfreezes scrolling. Ctrl-s means xoff (turn off transmission), while control-q means xon (turn on transmission).

A printer uses xon/xoff when it has a built-in "buffer" that can hold a certain number of characters (1024, for example) for printing. The buffer allows the computer to send characters to the printer at a fairly fast rate and then hold them while the slower printer mechanism prints them out. While the buffer in the printer is emptying, the computer can be used for more processing, such as editing a file, during the print operation, without slowing down your text editor. You should notice a delay in processing only when the printer calls for more characters to fill its buffer.

This operation is as follows. After your printer driver sends each character, it reads a status word from the printer and looks to see if the printer is sending back a ctrl-s. If it detects a ctrl-s, it tells the driver to stop sending because the buffer is full and to suspend transmission of characters until the buffer is once again empty. If no ctrl-s is sent back, the computer will continue to

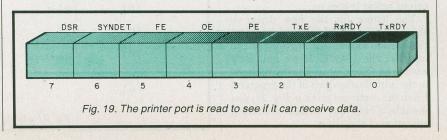

send characters to the printer until one is detected. Upon detection of a ctrl-s, the computer goes into a wait loop and waits for a ctrl-q, the signal that buffer is empty, to come from the printer.

ETX/ACK Protocol. This protocol is similar to xon/xoff, except that it's implemented differently. In this case, a block of characters (usually 128) is sent to the printer, followed by an etx character (03H = ctrl-c), which translates to "end of text." After the entire block of characters has been printed out, the printer sends an ack (06H = ctrl-f), which means "acknowledged; last transmission received."


Writing a Sample Driver. When we explored the BIOS listing, we found a driver for the simplest kind of printer—a teletype-like device with no advanced protocol. We're now going to write a driver for a printer that uses xon/xoff. Our example will assume a Diablo 630 daisy wheel printer connected to our CP/M system through a serial board that's running at 1200 baud and uses an Intel 8251 UART.

Look back at the driver in the last section. When it wants to know if it can send a character, it checks to see if three bits are sent: 7 for data set ready (DSR), 2 for transmitter empty (TxE), and 0 for transmitter ready (TxRDY), as shown in Fig. 20.

Using xon/xoff is somewhat more complicated. We must ask the UART two questions. First, is it ready to receive a character from BIOS and, second, does it have a character ready to give to BIOS. In the first case, we ask the UART whether bits 0 and 2 are set. In the second case, we want to know whether bit 1 (RxRDY) is set.

With xon/xoff, there are two things that can occur when a program calls the driver to send a character to the printer. In either case, a character gets sent to the UART to transmit it to the printer. Then, either (1) the UART will not have sent an xoff, in which case control will return to the calling program so that it can get another character; or (2) the UART will have sent an xoff, in which case the driver won't return to the calling program but will wait until xon is received before it goes on.

The listing for the new driver is shown in Fig. 21. We're assuming here that we don't have to do anything else to initialize the UART. If we did, we'd have to add the appropriate instructions to the initialization part of the program. From the comment given in Fig. 21, you shouldn't have any trouble following operation of the driver.

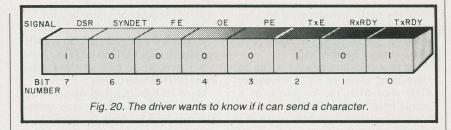

**Testing the Driver.** Inserting the new driver into the BIOS and writing it on the system tracks of a diskette is somewhat involved. What we need is a way to test our driver routine without going through this process. Here's how:


- 1) We put the driver routine at 100H, just like any other program, using DDT and the *a* command. (It can also be assembled with ASM.)
- 2) We put a "jmp 100" instruction at the start of the printer driver routine in the BIOS.

We'll assume at this point that you've

written an appropriate driver routine of your own. It may not be perfect, but it's ready for a preliminary test. Hence, as we describe how to test our routine, you can follow the same steps with your routine.

First, you must know where to put the jmp 100 instruction. This isn't difficult if you've assembled your existing BIOS into a PRN file. Simply look through the listing for the printer driver routine and make a note of the address where it starts (DF35H in our 56K system, as you can see from the last section

```
LIST CHARACTER IN C
  New xon/xoff printer driver.
  (was just a RET return instruction.)
LPTOUT: in
                 prts
                            ; input 8251 status
                 05h
        ani
                            ; AND 8251 for ready to send
                            ; exclusive-OR to get zero
                 05h
        xri
                              flag
        jnz
                 Iptout
                            ; loop until UART register is
                             ready
                            ; get list character from C to
        mov
                 a.c
                            ; output to UART data register
        out
                 prt
                             and send
        in
                 prts
                            ; is UART
                                         ready
                                                 with
                             character?
        ani
                 02h
                            ; does receiver have a charac-
                              ter ready?
        xri
                 02h
                            ; mask
        rnz
                            ; if not zero then continue
                             normally
        in
                 prt
                            ; yes - get the character
        cpi
                 13h
                            ; is it actrl-s freeze (xoff)?
        rnz
                            ; no - skip it
lpt1:
                 prts
        in
                            ; it was a ctrl-s, so now wait
                              fora
                            ; ctrl-q to return
        ani
                 02h
        xri
                 02h
                 lpt1
        inz
        in
                 prs
                            ; character is ready
        cpi
                 11h
                            ; is it a crtl-q (xon)?
        jnz
                 lpt1
                            ; no, so loop until it is; i.e.
                             let
                             ; printer buffer empty
        ret
                            ; finally a ctrl-q; return for
                              next character
                   Fig. 21. Listing for the new driver.
```

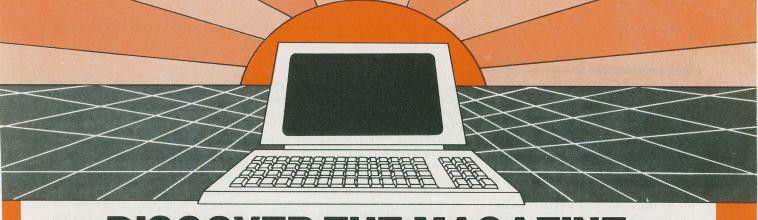

## DISCOVER THE MAGAZINE THAT HELPED LAUNCH THE MICROCOMPUTER INDUSTRY

Incredible as it may seem, *Popular Electronics* helped launch the microcomputer industry. Back in 1975, we published plans for building the first powerful microcomputer based on the 8080 cpu. These plans generated incredible excitement—and started the world thinking about personal computing.

Since then, we've added more coverage of personal computing. Today, so much of the magazine is devoted to microcomputers that we've changed our name to...

#### **Computers & Electronics**


Computers & Electronics continues the Popular Electronics tradition of helping our readers experience the advances of the future—today. We do it with clearly written, in-depth articles explaining each innovation—plans for building useful, money-saving projects incorporating the newest technology—reviews of the latest mass-produced equipment. Whether it's microcomputer equipment, audio, video, or personal electronics, Computers & Electronics will make it possible for you to enjoy the newest, the most sophisticated, the most innovative technology around.

#### Helpful buying guides

Computers & Electronics compares and contrasts computers and other electronics gear in meaningful buyer's guide articles. We discuss features and options, what to look for, and how to get the best value. Recent buyer's guides have covered computer printers, pocket computers, sophisticated telephones, video cassette recorders and high-tech audio cassettes.

#### **World-famous test reports**

In every issue of *Computers & Electronics* you'll find our famous in-depth test reports. We take a new product, test it and analyze the results. Recently we've tested the Radio Shack TRS-80 Model III, the IBM Personal Computer, and the Sinclair ZX-81. Microcomputers by Apple, Atari, Hewlett-Packard, Intelligent Systems and Netronics. Plus an interactive data terminal, software,

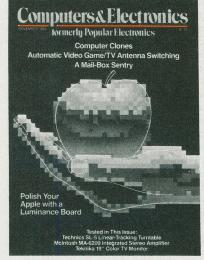

and a variety of audio, video and testing equipment.

## Innovative construction projects

If you're a do-it-yourselfer, you'll love the construction projects in *Computers & Electronics*. Not only did we bring the world the first successful microcomputer kit, but also projects for building the first low-cost modem. The first computer keyboard integrated with the computer (SOL).

The first low-cost voice synthesizer. The first low-cost logic analyzer. The first 1802-based microcomputer (ELF). The first low-cost function generator. The first gas-laser communicator (awarded a place in the Smithsonian Institution). The first low-cost color graphics computer module. An interface to transfer narrow line listings from your TRS-80 Pocket Computer to either a printer or CRT screen....

As you can see, our construction projects, while not necessarily complex (thanks to multifunction IC chips), will keep you at the forefront of technological development—at remarkably low cost. And in the future, we'll be bringing you construction projects to help you make your microcomputer more useful—whether it's an enhancement, an application, or a merging of technology with external controls and products.

#### Get the leader in the field at up to 33% off!

Computers & Electronics is the world's most widely read computer and personal electronics magazine. Now you can subscribe at big savings: up to 33% off. At our New Subscriber rates, a one-year subscription is only \$12.97. Take advantage of this offer—complete and return the coupon or postage-paid reply card today!

Computers&Electr	ronics P.O. Box 2774, Boulder	, Colorado 80322				
☐ <b>YES!</b> Send me one year (12 issues) of <i>Computers &amp; Electronics</i> at \$12.97—I save 19%. ☐ I prefer two years for \$22.97— ☐ I save 28%. ☐ Make that three years for \$31.97— ☐ I save 33%.						
Savings b	pased on full one-year subscription prior	ce of \$15.97.				
Mr./Mrs./Ms		CONTROL OF STATE OF S				
	(please print full name)	4N146				
Address		Apt				
City	State	Zip				
CHECK O	NE: Payment enclosed.	Bill me later.				

of our BIOS listing given in Fig. 18).

You can write your driver with a word-processing program, assigning the file the name NEWDRIVE.ASM, assemble it to get a HEX file, and call it from DDT by the assigned file name. Alternatively, you can type it in directly from DDT using the *a* command. In either case ORG it at 100H.

At this point, your printer shouldn't be operating, since you haven't toggled it on with a ctrl-p. Use the *a* command to insert a jmp 100 at the start of the driver routine in BIOS. For our particular BIOS, it would be:

-adf35 DF35 jmp 100 DF38 .

Note that you're modifying the very BIOS with which you're operating. If you do something wrong, the system



Finding a new address.

may die; so save your files before you get in too deep.

Now comes the moment of truth. Toggle on the printer with a ctrl-p and hit RETURN a few times. The printer should respond. Now type something and hit return. Whatever you type should be printed out, including the return. If something other than what you typed or nothing at all is printed, either your driver is defective or your jmp 100 is in the wrong place.

**Installing the New Driver.** Once you've gotten your driver to work in this nonstandard location, it's time to install it in your CP/M system. However, before you can complete this process, you must learn about the MOVCPM and SYSGEN utilities in CP/M and that magic number N.

MOVCPM. This amazing program actually contains CCP and BDOS, which is most of the CP/M operating

system. It may also have part of the BIOS in it. If the people who configured your system didn't put the disk part of BIOS in the BIOS.ASM file, they put it in MOVCPM. What MOVCPM may not have in it are the drivers for the other I/O peripherals, which are probably in the BIOS.ASM file. MOVCPM may have these routines in it, but they may not work on your equipment or they may merely be skeletal drivers that won't work on any system.

When you call MOVCPM, it loads three things into memory: MOVCPM itself; CCP, BDOS, and maybe part of BIOS in the form of a COM file; and a bit map that tells it which bytes of the COM file must be "relocated" and which don't.

MOVCPM can't put the COM file in high memory, where CP/M normally goes, since the system we're operating with is already there. Remember, you can't make major changes to the same sections of code that constitute your operating system without getting into trouble. So MOVCPM keeps this version of CP/M in low memory, starting at location 900H, which leaves just enough room for the program and the bit map below it. This version of CP/M is called the system image, which means that the instructions of code look just like the actual operating version of CP/M in high memory but are in the wrong place to actually execute properly (see Fig. 22).


When you call MOVCPM from CP/M, you must specify the memory size of your computer, such as 64K, and tell it whether you want the CP/M image to be moved to high memory and execute. This is something you almost never want, since the CP/M image is probably incomplete and won't work, resulting in a "crashed" system if you attempt to execute it. If you don't want this to happen, you can type an asterisk after the size: "A > movcpm 56 \*" in which the "56" means that you want to generate a 56K CP/M system and the '\*" specifies that the image is to remain in low memory, where it's not to be relocated or executed.

You can also use an asterisk in the memory field if you want to simply use all available memory: "A> movcpm \*
\*" (takes 64K in a 64K system, 48K in a 48K system, etc.). In our particular case, we can't do this because the upper 8K in our computer, although present, is used for special video drivers. (The routine determines how much memory the computer has by testing higher and higher addresses to see if it can put something into and read it out of each

location. When it no longer can, that's the top of memory.)

In moving this image of CP/M to high memory, MOVCPM starts off with all 8080 instructions written as if they were in a 20K system. It then determines the difference ("bias") between a 20K system and the size we specified, like 56K. Finally, it uses the bit map to change only those bytes that represent addresses in the code (the last two bytes of a jmp instruction, for instance). That's it. The resulting new image sits in low memory waiting for the next thing we want to do with it. Even though the addresses are changed—as if the bios were in high memory—it isn't actually moved there.

Now we save this image, using the SAVE utility. MOVCPM is very helpful

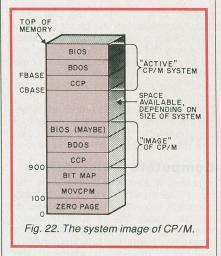

here because it tells us just what to type:

A > movcpm 56 \*
CONSTRUCTING 56K CP/M
vers 2.2
READY FOR "SYSGEN" OR
"SAVE 45 CPM56.COM"
A >

At the A > prompt, we type "save 45 cpm56.com". The image is 45 256-byte "pages" long, and MOVCPM suggests that we call the file "CPM56.COM".

**Urge to Merge.** Once we have the CPM56.COM file of the CP/M image safely stored on disk, we merge the BIOS.ASM file, which we've modified by putting our new driver into it, into CPM56.COM. To do this, we use a special technique in DDT and the magic number, N. Then we take the resulting complete image and write it onto the system tracks of a formatted, blank disk, using SYSGEN. We'll call this file "CPM56n.COM," where *n* is "new."

The Magic Number N. N is simply the difference between where MOVCPM puts the CP/M image and where CP/M actually goes in high memory, as shown in Fig. 23. Notice here how the CP/M image placed in low memory by MOVCPM is related to the CP/M image that will be placed on the system tracks of the new disk. This new image will occupy exactly the same addresses as the CP/M currently running in high memory, except for the changes made to BIOS by the new driver.

CCP is located at 980H in the system image but will be at BC00H in our 56K system when actually installed and running; BDOS is located at 1186H in the image but will be at C406 when running, etc. You can see that all these pairs of numbers are related by the same constant, which can be found by subtracting any two of them.

Finding Addresses. To find the magic number N, we must know at least one pair of addresses—one in the MOVCPM image in low memory, the other in running CP/M in high memory. A good one to work with is CBASE, which is the bottom of CCP. The first half of this is easy because in the system image, CCP is always at 980H, no matter what size system you have. CBASE for high memory isn't quite so easy to find. However, if you examine locations 6H and 7H in memory while CP/M (not DDT) is running, you'll find an address that's close to the start of BDOS. CCP is usually about 800H bytes long; so if you subtract 800H from this address, you obtain CBASE, in our case, C406 - 800 = BC06. Knowing that CCP starts on a page boundary, we figure it's probably at BC00H.

Another way to find CBASE is to examine the BIOS.PRN (not ASM) listing. CBASE and several other fascinating addresses are often part of the address location arithmetic in the beginning of the file. Checking this file, we find that BC00H is, in fact, the start of CCP.

DDT has a handy function that performs arithmetic on hexidecimal numbers. While in DDT, you can use this function by typing "hx,y" after the prompt, where x and y are four-digit hex numbers. For any two hex numbers, DDT will print out the sum (x + y) and difference (x - y). In this case, we want to know the difference between, say, 980H and BC00H. It would also be nice if we obtained a negative number so we could later simply add it to other numbers to perform the conversions.

If you type "h980,bc00" after the DDT prompt, DDT would respond with "C580,4D80". It's the latter difference number, 4D80, we want, which is our so-called "magic" number. We must know this number for two reasons. First, we want to be able to look at certain sections of code in the MOVCPM mage in low memory and know what we're looking at. We know where things are in BIOS in high memory, from BIOS.ASM, and we must be able to translate this into equivalent locations in low memory. The magic number does this, as we shall see.

The second reason we must know this number is that we're going to use DDT's ability to load a HEX file with a "bias" (offset) instead of at the ORG address of the file. Thus, if we have a HEX file ORGed at, say, D200 and we want to load it into memory somewhere else—say, at 1F80—we simply find the difference between these two numbers and type it into DDT following the r (read) command. As you can see, this is the same old magic number, 4D80. For example, if we want to load with bias a HEX file called NEWBIOS.HEX that is ORGed at D200, we'd do the following:

-inewbios.hex -r4d80


and the file will be placed in memory at location 1F80.

Inserting the New Driver. At this point, you should have a working driver routine that you're ready to insert into your CP/M operating system. The first thing you want to do is create a new version of the BIOS.ASM file, one that incorporates the new driver. (Remember that this file might have a different name, depending on your system, such as BIOS.ASM, GBBIOS.ASM, etc.)

Start by making a copy of the old BIOS.ASM file and call it newbios.asm by typing "pip newbios.asm = biosio.asm" after the A > prompt. Bring NEWBIOS. ASM into your wordprocessing or text-editing program. Delete the program lines for the existing driver. Then either type in the assembly code for the new driver or, if your word processor will permit it, copy the file containing the new driver directly into the correct location in NEWBIOS.ASM. Also, if you have to add anything to the initialization part of BIOS, to get the UART off on the right foot, now is the time to do it.

Reassemble the new BIOS by typing "asm newbios" after the A > prompt. You now have NEWBIOS.HEX and NEWBIOS.PRN files. You can now use MOVCPM to create the CP/M image, as described above. If you already have the system image (CPM56.COM or whatever) stored as a file, you can skip this step.

You're now going to use DDT to do the actual merging of the new driver into the system. Load the system image as you call DDT by typing "ddt cpm56.com" after the A > prompt. (Don't forget that the number after cpm in the file name will be different for different-size memory systems.) To make certain that everything is where you think it is, use DDT to explore this image by looking at the beginning of CCP, as shown in Fig. 24. It should be the same as the running CCP in high memory. You can check this out by typing

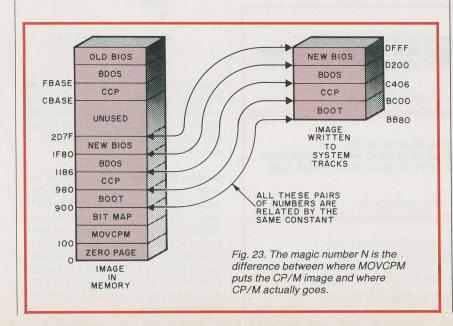

a"dbc00" after the DDT prompt; it should be as in Fig. 25. Note that the address column, should now read "BC00, BC10, BC20, etc." instead of the low-memory addresses.

Using the d command lets us see that the sign-on message is really there. Check the beginning of BIOS to see if this is where the jump table is:

-11f80 1F80 JMP D3D3 1F83 JMP D334 1F86 JMP DE79 1F89 JMP DE7C (etc.).


A look at the running BIOS in high memory should be the same, again with exception of the addresses. Now find the older driver routine, if there was one, in the system image and in the running BIOS. They may not be the same.

Merge In New BIOS File. We're now going to use DDT to merge the NEWBIOS.HEX file into the CP/M image in low memory. This is where we use offset number N. Although NEWBIOS.HEX is ORGed in high memory (at DE70 in our case), we want to lay it down on top of the BIOS part of the system image in low memory (at 2BF0 in our system).

Type "inewbios.hex" after the DDT prompt to put the file name in FCB. Then type "r4d80" to read in the file with an offset of 4d80. Now look at the image with the *l* command to ascertain that the new driver is where you want it to be. If it is, you're ready to save the image as a file back onto the disk:

-g0 A > save 45 cpm56n.com

The 45 is the same number of 256-byte pages that MOVCPM told you to save; this number will remain the same unless

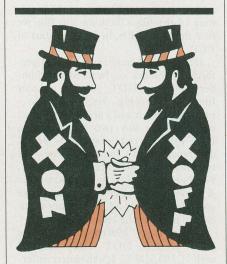

XON/XOFF protocol.

your modification has expanded BIOS past a page boundary. The *n* simply means "new."

We're now ready to create a new system disk. Start by placing in drive B a formatted disk. SYSGEN is often used to simply copy the current CP/M system from the system tracks of the working disk to those of a formatted disk. In that case, no file name is specified when SYSGEN is called. However, we want to use the CPM56n.COM file when we

generate our new system; so we type "sysgen cpm56n.com" after the A> prompt (don't forget the n). SYSGEN will reply as shown in Fig. 26. Note that you must type a b to specify the destination drive and a RETURN once the destination disk is on B:. SYSGEN will write the new version of the operating system onto the system tracks of the new disk.

You're done! You now have a new custom-configured operating system that you've made yourself. Test it using DIR, and use TYPE to see if it will really print out when you toggle your printer with a ctrl-p. If you're testing an xon/xoff or etx/ack printer, you'll have to send enough characters at one time to fill up the print buffer.

**Driver Installation Summary.** Once you become very familiar with this installation process, this is what you'll be typing on-screen. (We're assuming you aren't going to check memory at all with DDT.) Of course, memory size and the number of pages to SAVE will depend on your specific system.

A>pip newbios.asm=biosio.asm You add your driver to NEWBIOS.ASM with a word processor and then store the revision as NEWBIOS.ASM:

A > asm newbios

**A** > movcpm 56 \* **A** > save 45 cpm56.com

These last two steps won't be needed every time.

A > ddt cpm56.com

-inewbios.hex -r4d80 -g0

A > save 45 cpm56n.com

A > sysgen.

That's all there is to it. By going through this procedure a few times, you'll be gaining valuable understanding of the BIOS in general and experience in manipulating it according to specific needs.

**Comes the End.** This concludes our series, which was excerpted and condensed from the forthcoming book *The Soul Of CP/M*. We've covered here only highlights of portions of what the book covers in greater detail. We hope you've enjoyed your journey through the fascinating realm of CP/M and have added considerably to your knowledge of this powerful popular operating system for small computers. 

◇

Fig. 24. The image at the beginning of CCP.

Fig. 25. The running CCP in high memory.


SYSGEN VER 2.0
DESTINATION DRIVE NAME (OR RETURN TO REBOOT) b
DESTINATION ON B, THEN TYPE RETURNRETURN
FUNCTION COMPLETE
DESTINATION DRIVE NAME (OR RETURN TO REBOOT) RETURN
Fig. 26. SYSGEN replies to the prompt for the new file.

## —Learning =

## 16-BIT MICROCOMPUTER TECHNOLOGY

Part 6: How to Use Machine Language Programming

By George Meyerle

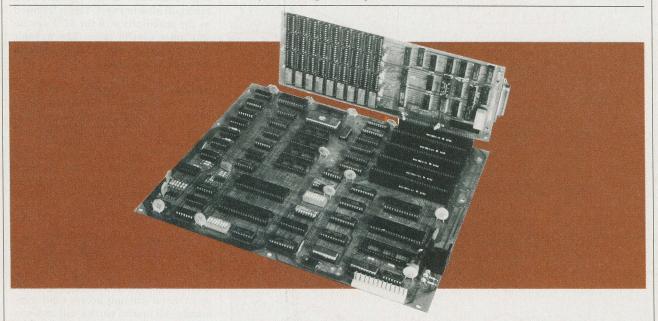

PREVIOUS articles in this series should have convinced you that, before you can understand, repair, or design microcomputers that use the latest generation of hardware, you must have had at least an introduction to machine/assembly language programming. By using machine language subroutines in conjunction with BASIC or other high-level languages, it is possible to increase execution speed and, in some cases, allow operations that are not possible using the high-level interpreter alone. This month we will discuss how to learn machine-language programming painlessly

#### TABLE VI—I/O PARAMETER SETTINGS

Baud rate	S1-3	S1-2	S1-1
110	On	On	On
150	On	On	Off
300	On	Off	On
600	On	Off	Off
1200	Off	On	On
2400	Off	On	Off
4800	Off	Off	On
9600	Off	Off	Off

Parity disabled: S1-4 on Parity enabled: S1-4 off Parity odd: S1-5 on Parity even: S1-5 off and we will gain some practice using it with the monitor program resident in the IBM-compatible, 16-bit Explorer 88/PC microcomputer.

Quickly reviewing the design of the Explorer 88, recall that it can be set up to operate in 3 different modes. The first, and least expensive mode (\$400), allows accessing the monitor program using a standard terminal connected to the RS232 port. The second choice (about \$600 more) is to add an IBMcompatible keyboard, color board, and either a color or black/white monitor. This gets you that much closer to being truly IBM-compatible. The next step involves the addition of a floppy-disk card and up to four floppy drives. At this point, you can run IBM-PC DOS or any of the many IBM-compatible disk operating systems, including Digital Research CP/M-86, all of which include fine monitor or debugging programs. The following applies to any configuration selected.

Monitor Programs. In its simplest form, a monitor program is a collection of routines that allow programs to be generated, tested, modified, and saved for future use. The original microcomputer monitors consisted of a front panel array of switches and LEDs that allowed access to the CPU and memory.

However, the flashing LED approach was hard to use and scared away many casual observers. On the other hand, ROM-based monitors, including that used in the Explorer 88, are easy to use and understand; and, with a litle practice, you should be able to write short programs in 16-bit 8088 machine language. Since it is not practical to write long programs or subroutines without the help of an assembler, once the basics are learned, it is suggested that you invest in one of the many available assembler programs.

Monitor Overview. All 8088 microprocessors auto-boot on power-up or reset to location FFFF0H. This location, in the Explorer monitor, contains a jump to location FE000H which is the beginning address of the upper-most 8K of ROM and of the monitor program

#### **TABLE VII—MEMORY MAP**

00000-0FFFF	RAM
FE000-FFFFF	ROM
00000-00003	Divide-by-zero interrup
00004-00007	Single-step interrup
00010-00013	Overflow interrupt
0000C-0000F	Monitor-trap
00010-0002F	System
00030-00033	UART interrupt
00034-0FEFF	System

#### .. 16-BIT TECHNOLOGY

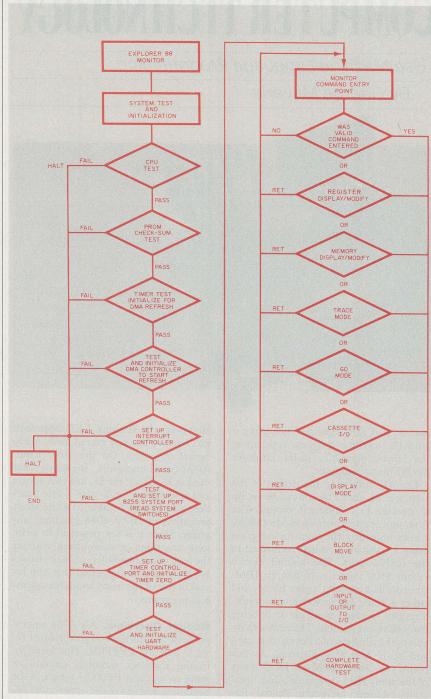


Fig. 18. Flowchart of the monitor program.

whose flowchart is shown in Fig.18. Note in this flowchart that, before the program is ready to accept commands from the keyboard, a preliminary hardware check is made. If any hardware test fails, the CPU is automatically halted. The program begins by checking the CPU. All registers, including the flags, are tested. If they are OK, the program continues with a PROM check-sum

test. This adds the contents of all 8K of ROM and compares the results with the correct answer.

The next component tested is channel 1 of the timer. If the timer test is OK, channel 1 is programmed to provide the refresh clock signal to the DMA controller. Next the DMA controller is tested. The count and command registers are tested by writing various pat-

terns and then checking the results by reading the registers. If all tests are passed, the count register is set for a 64K system and channel 0 is enabled so that the RAM refresh process can begin.

The program then sets up the interrupt controller mode registers and masks off all interrupts. This is followed by the initialization of the 8255 system and timer control ports. The monitor then sets up the data and stack segment registers and the stack pointer. It also clears the console input and output buffers. The 8250 UART is then initialized. This process involves reading the switch #1 at port B of the 8255. These switch settings determine the baud rate and parity selections (Table VI) to which the UART will be initialized. The monitor also downloads the interrupt jump vectors to the lowest locations in RAM as shown in the memory map in Table VII. Note that the top 256 bytes in the first 64K bank are reserved for the stack and other monitor operations.

After testing the hardware and setting the UART, the monitor idles at the Command Entry Point awaiting entries from the keyboard. The program is set up so that it will only accept valid commands. All invalid entries will result in the display of "??" and the abortion of the process attempted. Valid commands are:

- D Display memory contents
- R Register display/modification
- B Block move of memory
- M Memory modification/display
- I Input one byte from an I/O device
- O Output one byte to an I/O device
- CO Cassette output from memory to cassette
- CI Cassette input from cassette to memory
- T Trace instructions
- TR Trace instructions with register report
- G Go run from memory with optional breakpoint
- GR Go run from memory with optional breakpoint and register report
- HT Hardware tests of ROM, RAM, cassette, interrupt controller, timer, DMA controller and UART.

In future issues, we will show how to use the ROM-based monitor in practical programming.

(To be continued)

## TELETEXT EXPERIMENTS BY NETWORK

Computers may cover the world on this latest communication network, now being tested in the U.S.

By Leslie Solomon

WHILE we computer types have been busy designing new computers and putting new software together, others have also been very busy (and very quiet) doing something that might affect the future of computing as we know it.

A couple of times during the past few years, I have written about signal activity during the vertical interval of the NTSC TV signal. To see this interval and the activity, all one has to do is adjust the vertical speed of any TV receiver until the wide, dark horizontal bar appears in the display area. This dark bar is the vertical interval and it occupies some 20 horizontal lines. If you look at the lines immediately above the picture, you will see several strangelooking sets of dots and bars, some in color and some appearing to be in motion. If you have a good scope and access to the receiver video signal, you can take an even closer look at the interval between the vertical sync and the beginning of the next field's video information.

Until recently, the vertical interval contained engineering test signals such as multiburst, color bar test, a composite test signal, VIR (for auto color setting), and various forms of digital test signals used by the networks—nothing very exciting except for those people interested in such doings.

Most of us have heard of "Teletext," and usually associated it with happenings in European TV—the BBC has been using it for years, and the French have been involved with their Antiope approach. Some might have even been aware that there is some Teletext activity next door in Canada, and that Japanese stations were testing a form of this new digital signal.


Now, Teletext is here in the USA, and being tested by NBC and CBS. If you take a look at lines 15 through 18 of the current vertical interval being transmitted by these networks, you will see some full lines of very busy signals. An example of each is shown in the accompanying photos. The Teletext signals occupy the four horizontal line intervals leading up to the conventional test signals. (If you are looking at the interval on a TV receiver, the Teletext signals are those "grassy" lines slightly above the top of the picture.) These signals are not to be confused with the closed captioning currently used by ABC and PBS as an aid to the deaf.

According to the North American Broadcast Teletext Specification, this activity may be extended to encompass lines 10 through 14, and may even reach the full field. Hardware people should keep in mind that this data is being transmitted through a 4-MHz channel (begins to look like a disk to you?).

What is being transmitted? At the present, only test data. But even this can consist of a very large number of pages, selectable via a hand control attached to the TV decoder. The user can page through the system in the same way as paging through the menus on The Source, Compuserve, or any other data base, and thus pick and choose his/her subjects. Unlike the data base, the received data can be in color, and even reasonably high-resolution color graphics can be displayed (using the color-TV receiver as the monitor). And there is almost no end to the number of pages that can be sent. Page updating can occur in real time as fast as someone can type.

It is not beyond the range of probability that a computer can be used to download data from this TV source, with all types of software being made available. Furthermore, with a telephone attachment, interacting (or even data storage) can be attained. One other thought: now that we have battery-powered TV receivers, battery-powered computers, and direct satellite-to-home TV in the offing, we are in a position to have worldwide software distribution. Computers will really cover the world in the very near future, even if you are in a canoe paddling up the Amazon.

We shall have to keep an eye on further Teletext operations.

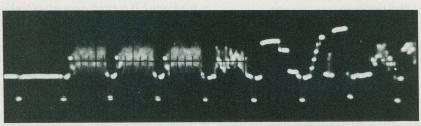






Top and center are Teletext signals on NBC and CBS respectively. At bottom are closed-caption signals on PBS.

#### THE ELECTRONICS SCIENTIST



Flat-Panel Displays A Tunable 60-Hz Hum Filter

By Forrest M. Mims, III

Flat-Panel Displays Will Revolutionize Information Processing

MORE and more new products are exploiting the rapidly advancing state of liquid-crystal and other flat-screen display technologies. These products will revolutionize the way many of us process information both at home and at work.

They will, for instance, make "personal" computers truly personal. After all, have you actually considered as "personal" a computer system that fills a tabletop with its television monitor, keyboard, disk drives, and other paraphernalia, all connected by a bird's nest of cables and wires?

Portable computers with all the features of today's desktop units will be made possible in part by large-capacity liquid-crystal and other flat-panel displays. Applications for these portables will go beyond the standard word-processing, spreadsheet, and communications packages. For example, a portable computer with a flat-panel display could be used as an oscilloscope.

The display on the new Radio Shack Model 100, for example, has 64 by 240 or 15,360 elements or pixels (Fig. 1). This is more than adequate for a low-resolution solid-state oscilloscope. Indeed, many of you may recall the series of "Experimenter's Corner" columns several years ago in this magazine in which I described various kinds of do-it-yourself flat-screen LED oscilloscopes. The maximum resolution of those simple scopes was only 10 by 16 elements.

Considering the peripherals already available for existing personal computers, one can envision a new family of highly sophisticated peripherals for the new generation of portable computers represented by machines like the Model 100.

For example, consider the Model 85 aScope™ module that transforms the Apple II into a powerful, programmable dual-trace oscilloscope with memory capability and a 50-MHz bandwidth. This computer accessory, which is made by Northwest Instrument Systems, Inc. (PO Box 1309, Beaverton, OR 97075), and others like it have greatly expanded the potential role of personal computers and, at the same time, alarmed makers of conventional test equipment. And if the conventional test equipment companies are worried now, just wait until instrumentation peripherals become available for the portables (rest assured they will).

Hopefully by now you can understand my enthusiasm for the new flat-panel display technology. But you'll have to actually see and use a product with a large-capacity flat-panel display to fully appreciate the convenience and portability it offers. You'll probably have that opportunity soon, considering the rate at which new products are being announced. Meanwhile, let's examine some of the technical aspects of flat-panel displays.

**Liquid-Crystal Displays.** Thus far liquid crystals are dominating the commercial flat-panel display market. A few years ago makers of the comparatively simple liquid-crystal readouts used in digital watches took a beating due to severe competition. Many companies either abandoned or were forced out of the liquid-crystal readout business.


The market for high-resolution, flatpanel, liquid-crystal displays, however, was unaffected by this development. The market for non-watch liquid-crystal displays, for example, more than doubled between 1980 and 1982.

Among the first commercial "highresolution" liquid-crystal displays was the 16 by 16 element unit used in Milton-Bradley's "Blockbuster" handheld game. I was so impressed when this toy was introduced several years ago that I immediately bought one for my son. Today, of course, the resolution of the "Blockbuster" screen is downright primitive when compared to the 220 by 240 display elements (pixels) of Toshiba's handheld television receiver. This receiver's two-inch screen is made by applying a thin film of nematic liquid crystal to a 51.4 by 41.4-mm silicon chip containing an array of 220 by 240 PMOS switching transistors.

A single pixel consists of a PMOS transistor and a capacitor. When the gate of the transistor is strobed by the video scan signal, the capacitor is charged to the appropriate video signal level. The capacitor holds its charge until refreshed by the next strobe signal.

Toshiba's researchers found that the electrodes that interconnect the picture element transistors must be highly reflective and as smooth as a mirror. Otherwise, undesirable scattering of light within the display would greatly reduce its apparent contrast. They eventually selected platinum for the reflective electrode since it appears very white and is therefore well suited for a black and white television display.

Figure 2 is a simplified block diagram of Toshiba's display chip. Note the presence of two gate bus drivers (to address the rows) and connections to both ends of the drain buses (to address the columns). This redundancy is part of a clever design ploy to salvage chips that may have defective bus driver elements or bus lines. Such built-in redundancy has become a standard design technique for very large scale integrated circuits

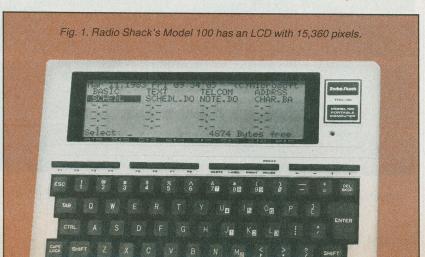

(VLSI), especially memory chips.

Figure 3 is a cross section of the edge of the Toshiba display. The silicon chip, which is very thin and fragile, is mounted on a very flat and sturdy glass substrate. A 10-micron layer of mixed nematic liquid crystals is applied to the chip. The assembly is topped by a protective window that includes a transparent conductive film on its inner surface. This provides the display's counter electrode.

Since the chip includes its own gate bus drivers, actually multiplexers, only twelve bonding pads are necessary to access all 220 gate buses. Only one of the two gate bus drivers is used in practice, so only six of the bonding pads are required!

Toshiba's display is typical of what can now be done with high-resolution liquid-crystal flat-panel displays. Its display achieves a contrast ratio of 20:1 and has a response of only 30 ms. While I've not been able to determine the power consumption of the display alone, the complete miniature television receiver in which it is used consumes only 1.3 W. This is certainly higher than a portable radio of similar size, but it is less than the 1.8 W consumed by Sony's miniature television, which uses a flat cathode-ray tube.

After miniature computers and tele-

vision receivers, a third major market for flat-panel liquid-crystal displays is compact oscilloscopes. The pioneer in this field is England's Royal Signals and Radar Research Establishment. Display technology developed there has been used by Scopex, Ltd. to produce the Voyager flat-screen scope.

The Voyager has a screen resolution of 128 by 256 elements for a total of 32,768 pixels. Easily viewed in bright sunlight, an advantage shared by most liquid-crystal displays, the Voyager has a frequency response of 150 kHz and weighs 2.5 kilograms. It operates for up to 12 hours from self-contained rechargeable batteries.



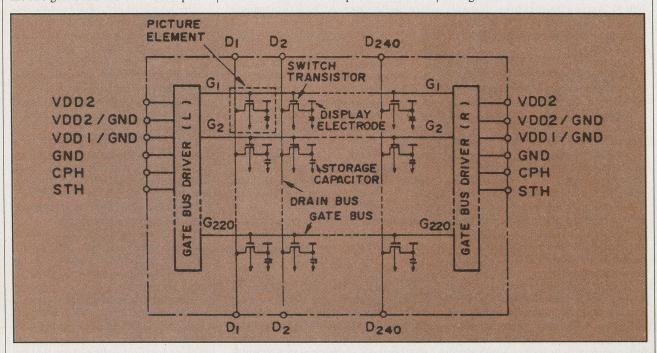


Fig. 2 (above). Toshiba's liquid crystal display.

Fig. 3 (below). Cross section of Toshiba's LCD.

Fig. 4 (right). Construction of Sinclair flat CRT.

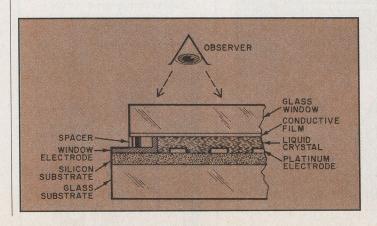

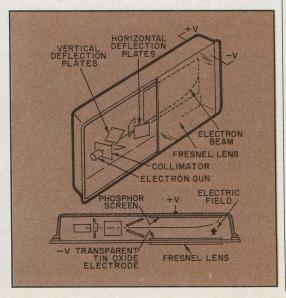

#### .. ELECTRONICS SCIENTIST

At \$6000 the Voyager is not intended for the general market. Instead, it's targeted for use in explosive atmospheres and for applications requiring the ultimate in portability. Considering the rapid advances in flat-panel display technology, I'm sure it's only a matter of time before compact battery-powered scopes with liquid-crystal displays become available for a few hundred dollars.

**Other Flat-Panel Displays.** Considerable work has been undertaken over the years to develop various kinds of flat-panel displays. Most effort has centered around the ubiquitous cathode-ray tube (CRT). Among the first firms to develop a viable flat-panel CRT for miniature equipment is England's Sinclair Research (Fig. 4).

In a conventional CRT, electrons are propelled at right angles toward a phosphor-coated screen. In Sinclair's tube, the electron gun is located to one side of the phosphor screen. The electron beam is propelled across the surface of the screen and then bent toward the screen by an electrostatic field. The screen is viewed through a window coated with a transparent film of tin oxide which serves as one of the focusing electrodes.

According to Sinclair, since the observer views the phosphor screen from the side struck by the electron beam, the screen appears twice as bright as the screen of a conventional CRT having the same beam energy.

Though Sinclair Research announced in 1981 that it was entering a four-year program aimed at putting its miniature flat-screen CRT into volume production, Japan's Sony Corporation was the first company to introduce a miniature television receiver using a remarkably similar flat-screen CRT.

The operating principle of the Sony

tube is virtually identical to that of the Sinclair tube. The only significant difference between them is their physical appearance. The Sinclair tube is shaped like a flat rectangle. The electron gun of the Sony tube is enclosed in a neck-like extension projecting from one side of the square display portion of the tube. Figure 5 illustrates the physical difference between the two tubes.

Figure 6 shows a demonstration version of still another kind of flat-panel display, a plasma dot-matrix readout panel made by Sigmatron Nova (1901 Oak Terrace Lane, Thousand Oaks, CA 91320). The Sigmatron displays are available with from 1.3 to  $150 \, \mathrm{cm}^2$  of active display area. At least two versions are now in production. Model TE  $1 \times 32$  is a 32 by 32 array having 1024 pixels, and Model TE  $1 \times 56$  is a 56 by 56 array having 3156 pixels. Both arrays have an active display area of 2.6 by 2.6 cm.

These demonstration plasma panels are installed in an enclosure complete with 12-V rechargeable batteries, analog and digital input ports, and microprocessor routines derived from an 8K EPROM and a 4K RAM. Demonstration routines include alphanumeric characters, graphics, scrolling, and a real-time oscilloscope. These are just some of the possibilities.

Because of the nature of their written language, Japanese companies have always been highly motivated to design very high-resoluion flat-panel displays. One of their latest entries in plasma display technology is a Sony panel with 512 by 1024 addressable dots for a total of 524,288 pixels! This remarkable display has a resolution of 127 lines per inch. It easily displays complex Chinese and Japanese characters and provides excellent graphics capabilities.

Other flat-panel display technologies are also being developed. Although con-

siderable work has been expended on light-emitting diode arrays, they require much more operating current than most other displays. More promising are electroluminescent and cathodoluminescent devices. We will probably hear more of this in the future.

#### Comparing Flat-Panel Displays.


Each of the various flat-panel technologies has relative advantages and disadvantages. Liquid-crystal panels use very little power and are ideal for battery-powered equipment. Furthermore, they are easily viewed in direct sunlight, something that surely cannot be said of some light-emitting displays.

On the other hand, liquid-crystal displays are relatively fragile and temperature sensitive. And they can sometimes be tricky to view. For example, the display of the Model 100 can be difficult to view when observed at some angles. When the external lighting is just right for the operator, others wishing to read the display may have to stand behind the operator.

Light-emitting diode displays have the potential of being much more rugged and having much longer operating lifetimes than other kinds of displays. But they are expensive to make and they use considerable current so their popularity depends on these factors.

Like liquid-crystal displays, plasma and cathodoluminescent displays are made largely from glass and are therefore fragile. Worse, these displays require considerably higher operating voltages than those using liquid crystals or light-emitting diodes. This greatly increases the difficulty of designing suitable drive circuitry. Electroluminescent displays are sturdier than those that require glass packaging, but they, too, require relatively high drive voltages.

(Continued on page 100.)

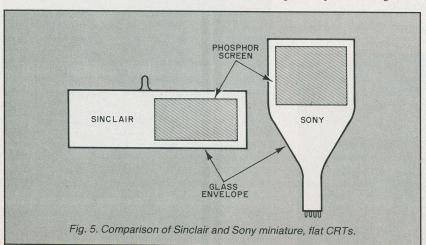



# Take the mystery out of electronics and computers with

wonder how an Electronic circuit works? How a computer computes? What to look for when buying audio, video, communications or computer equipment?

You'll find the answers to these questions—and practically every other basic personal electronics question—in the 1983 *Invitation to Electronics!* 

Invitation to Electronics is the complete guide to home electronics products from the Editors of Computers and Electronics magazine (formerly Popular Electronics). With photographs, drawings and detailed articles, it explains the inner workings of:

#### PERSONAL COMPUTERS.

What a computer is and how it works... the truth about computer intelligence... memory...peripherals...software...disk drives...printers...modems...languages ...pocket computers... features of the newest models of microcomputers.

#### **AUDIO EQUIPMENT.**

How should systems get the music to your ears...amplifiers...preamps... ...turntables...receivers...tuners...cassette decks...speaker systems...headphones ...signal processors...car stereos...the new compact optical discs...microcassette...how to choose audio components.

#### VIDEO EQUIPMENT.

Videocassette recorders and videodiscs

and how they work...the difference between Beta and VHS formats...optical versus capacitance electronic disc videodiscs...home satellite television...how a television set creates its image...component television...projection tv...how stereo tv will revolutionize the field.

### HOBBY COMMUNICATIONS GEAR.


The two basic elements of any communications system...the superhet receiver...why you need an antenna ...shortwave receivers...DXing (picking up broadcasts from around the world)...public safety scanners...CB ...marine and ham radio.

PLUS: You'll learn all about electronic circuitry...components and how to identify them...integrated circuits and "microchips"...how to solder and desolder...how to build projects...sample

projects. And, there are complete glossaries of audio and computer technical terms!

Invitation to Electronics. It contains everything you need to know to get started in the exciting world of electronics and computers. Order your copy today!

**ONLY \$3.95!** 



#### INVITATION TO ELECTRONICS CN 1914 • Morristown, NJ 07960

Please send me INVITATION TO ELECTRONICS. I enclose \$4.95 (\$3.95\* plus \$1.00 postage and handling). \$6.00 outside U.S.A.

Mr./Mrs./Ms.\_\_\_\_\_

(please print full name)

State

Apt.

Zip\_

Address\_City\_\_\_\_

\*Residents of CA, CO, CT, DC, FL, IL, MA, MI, MO, NJ, NY State and VT add applicable

#### .ELECTRONICS SCIENTIST

#### An Easily Adjusted Switched-Capacitor 60-Hz Hum Filter

In the "Project of the Month," in September 1982, I described two active notch filters designed to block 60-Hz hum. Both these filters used a single operational amplifier and six or seven outboard resistors and capacitors.

Newly developed switched-capacitor filters such as National Semiconductor's MF-10 can provide improved 60-Hz hum rejection. A basic 60-Hz notch filter requires only three external resistors and *no* capacitors. A 300- or 600-Hz clock signal is required, however, so there are no component savings over conventional op-amp 60-Hz notch filters.


Though they are more expensive than conventional op-amp active filters, the center frequency  $(f_0)$ , gain, and Q of a switched-capacitor notch filter are all easily adjusted. This means virtually any degree of 60-Hz rejection can be

#### any degree of 60-Hz rejection can be FOR ORDERS ONLY! TOLL FREE (800) 221-0828 2 The Largest Authorized Dealer in Brooklyn SOMY **Computers Peripherals & Software** Franklin Ace 1200 . NEW! Mattel Aquerius NEW! Panasonic 32K, RGB . . . . . . . . . . . . PRINTERS Call BSF ATARI Gemini 10X dot matrix Epson MX-80 III call Epson MX-80 Ft call Epson FX-80 In Stock . 298.98 \* \* ATARI BSR Atari 1200 XL HELWLETT PACKARD New HP 75C HP 41CV HP 16C Programmer 82161A Digital Drive 82163 A/B Video int. \* \$737.40 . 204.95 CASIO NEW! FX 802P w/printer . . 139.80 FX-702 pocket computer . . 74.95 FA-2 Cassette interface 36.90 FPL-10 computer printer . . 56.49 . 179.95 Full HP Line in Stock TEXAS INSTRUMENTS NEW! TI C.C. 40 . . . . . . . call Commodore TI 99/4A . . . . . . low 32K RAM card [PHP 1260] . 219.95 Commodore 64 complete w/word processor, w/Disk Drive printer Full line of TI software in stock 14" color monitor pet emulator only ... Full line of Timex software in stock SHARP 4 PACER Original 119,95 Daisey Dish KIDATA Microwave **MONITORS** \$8888 \* \* MATTEL \*

FOR ORDERS ONLY TOLL FREE- 800-221-0828

to availability and price change Mail and phone orders C.O.D. Master Visa O.K. Shipping extra. Everything Factory Fresh. 10 day Money Back ee (less shipping). FOCUS ELECTRONICS 4523-13th Ave.. Brooklyn. NY 11219

Circle No. 18 on Free Information Card

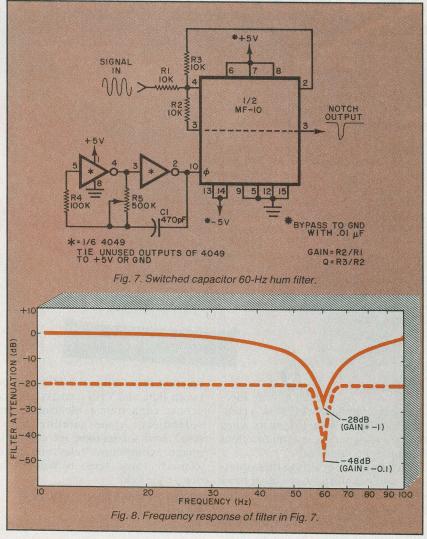

achieved. Furthermore, a switched-capacitor notch filter designed for 60-Hz rejection can be easily retuned to reject any frequency up to 30 kHz.

**How it Works.** Figure 7 is the circuit for a straightforward 60-Hz notch filter designed around the MF-10. The filter, which is operated in the inverting mode, provides a voltage gain of -R2/RI. The Q is  $f_0/BW$  (bandwidth at the -3 dB points).

The solid line in Fig. 8 is a logarithmic plot of the frequency response I measured for the circuit in Fig. 15. The dashed line in Fig. 8 is a logarithmic plot of the filter's response when R2 is reduced to 1K. This simultaneously reduces the gain to -0.1 and increases the Q to 10.

Notice the excellent sharpness of the second notch. Note also that both notches are precisely centered at 60 Hz and that their stopband and notch maximum at their stopband and notch maximum.

mums are separated by 20 dB. (A voltage gain of 1 is 0 dB, and a voltage gain of  $\pm 0.1$  is -20 dB.)

The filter is calibrated by setting the clock adjust potentiometer (R5) to 100 times the desired notch,  $f_0$ , or about 6000 Hz. For best results, the filter should be fine-tuned with the help of a 60-Hz signal coupled into pin 4 of the MF-10 via R1. Adjust R5 while observing the 60-Hz output waveform at pin 3 of the MF-10. The filter is precisely tuned when the amplitude of the wave is at a minimum.

The clock frequency of the test circuit I built was 5964 Hz when the filter was fine-tuned for a maximum notch at 60 Hz. This corresponds to a clock frequency-to- $f_0$  ratio of 99.4:1. The MF-10BN chip I used is specified for a clock frequency-to- $f_0$  ratio of 99.35:1,  $\pm 0.6\%$  (pin 12 low). The particular chip I tried in building my circuit was within 0.1% of the specified ratio.

## ENGLISH **BROADCASTS** No. A MERICA

#### By Glenn Hauser

TIME <sup>1</sup> EST	TIME UTC/GMT	STATION	QUAL.2 FI	REQUENCIES, kHz³
7:00 p.m4:00 a. 7:05-8:55 p.m. 7:30-8:00 p.m. 7:30-8:00 p.m. (+	0005-0155 0030-0100	UN Radio Spanish Foreign R. R. Prague R. Budapest	A B C B	6055 (when in session) 11880, 9630 6055 17710, 15220, 11910, 9835, 9585,
7:30-8:00 p.m. 7:30-8:15 p.m. 7:30-8:30 p.m. 7:30-9:00 p.m.	0030-0100 0030-0115 0030-0130 0030-0200	La Cruz del Sur, Bolivia BRT Belgium HCJB, Ecuador R. Mexico	D C A C	17710, 15220, 11910, 9835, 9585, 6025 (Wed. & Sat.) 4875 (Mon. only) 11625, 9880 15175 17765, 15430, 11770, 9705, 5985
7:30-9:30 p.m. 7:30-9:30 p.m.	0030-0230 0030-0230	SLBC, Sri Lanka BBC	CA	(Sat.) 15425 15260, 15070, 11835, 11750, 9915, 9515, 9410, 7325, 6175, 6120.
7:30-12:00 p.m. 7:50-8:15 p.m. 8:00-8:20 p.m. 8:00-8:25 p.m. 8:00-8:30 p.m. 8:00-8:30 p.m. 8:00-8:30 p.m. (+	0030-0500 0050-0115 0100-0120 0100-0125 0100-0130 0100-0130	HCJB, Ecuador Vatican Radio RAI, Italy Kol Israel R. Argentina R. Japan R. Budapest	B B B A C C B	5975 15155, 9745 11845, 9605, 6015 11800, 9575 11655, 9815, 7410 15345, 11710 (not Mon.) 17755 17710, 15220, 11910, 9835, 9585,
8:00-8:30 p.m.	0100-0130	La Voz de la Mosquitia, Honduras	С	6025 (not Mon.) 4910
8:00-9:00 p.m. 8:00-8:50 p.m.	0100-0200 0100-0150	R. Canada International V. of Germany	A A	9755, 5960 (TueSat.) 15105, 11865, 9590, 9565, 9545,
8:00-8:55 p.m.	0100-0155	R. Prague	В	6145, 6085, 6040 11990, 11970, 9740, 9630, 9540
8:00-8:55 p.m. 8:00-9:00 p.m. 8:00-9:00 p.m. 8:00-9:00 p.m.	0100-0155 0100-0200 0100-0200 0100-0200	R. Beijing V. of Free China V. of Nicaragua R. Zinica, Nicaragua	B C B C	7345, 6015, 5930 17855, 15120 17890, 15345, 11825 5950 6120 (variable; TueSat.)
8:00-9:00 p.m. 8:00-9:00 p.m.	0100-0200 0100-0200	VOA AFRTS, Los Angeles	A A	(time varies) 21460, 17735, 7205, 6873-USB 25615, 21570, 15430, 15330, 11790,
8:00-10:00 p.m. 8:00-10:30 p.m. 8:00-11:50 p.m. 8:20 p.m12:10 a	0100-0300 0100-0330 0100-0450 .m.0120-0510	WRNO, New Orleans R. Australia R. Habana Cuba R. Belize	A B B C	6030 9705 (not all Eng.) 21740 17735, 9525 3285, 834
8:30-8:40 p.m. 8:30-8:57 p.m. 8:30-8:55 p.m. 8:30-9:00 p.m.	0130-0140 0130-0157 0130-0155 0130-0200	V. of Greece Austrian Radio R. Tirana R. Moscow	B B B	11645, 9865, 9420 (not Sunday) 9770, 5945 9750, 7120 17700, 15425, 12010, 11780, 11770, 9710, 9700, 9610
8:30:-9:15 p.m. (- 8:30-9:30 p.m. 8:30-10:30 p.m. 8:45-9:15 p.m. 9:00-9:25 p.m. 9:00-9:30 p.m.	H) 0130-0215 0130-0230 0130-0330 0145-0215 0200-0225 0200-0230	R. Berlin International R. Japan AWR, Guatemala Swiss R. International Kol Israel R. Canada International	CCCAAA	11975, 9730 21640, 21610, 17825, 15195 6090, 12180, 18270, 24360, 30450 15305, 11715, 9725, 6135 12025, 11655, 9815 9755, 5960 (Sun. & Mon. also
9:00-9:30 p.m. (+	) 0200-0230	R. Budapest	В	15190, 11845, 9535) 17710, 15220, 11910, 9835, 9585, 6025
9:00-9:30 p.m. (+ 9:00-9:40 p.m.	0200-0230 0200-0240	R. Kiev R. Polonia	B C	17900, 17860, 15180, 11770, 11720 15120, 11815, 9525, 7270, 7145, 6135, 6095 (length varies)
9:00-9:55 p.m.	0200-0255	R. Bucharest	C	11940, 11810, 9690, 9570, 9550 6155, 5990
9:00-9:55 p.m. 9:00-9:57 p.m. 9:00-10:00 p.m. 9:00-10:00 p.m.	0200-0255 0200-0257 0200-0300 0200-0300	R. Beijing R. RSA VOA R. Moscow	B B A A	15120 9615, 6020, 5980 21460, 17735, 7205, 6873-USB 17700, 15425, 12010, 11780, 11770 9700, 9610
9:00-10:00 p.m. 9:00-10:00 p.m. 9:00-10:00 p.m. 9:00-10:30 p.m. 9:00-11:00 p.m.	0200-0300 0200-0300 0200-0300 0200-0330 0200-0400	R. Nacional, Brazil R. Korea V. of Free China R. Cairo VOA to Latin America	A C B B A	17830, 15290 11575, 11810 11740 (via WYFR) 12000, 9475 17640, 15205, 9650, 6130, 5995,
9:00-11:30 p.m. 9:00-12:00 p.m. 9:15-9:30 p.m.	0200-0430 0200-0500 0215-0230	AFRTS, Los Angeles R. Australia UN Radio	A B A	1580 21570, 17765, 11790, 6030 17795 15435, 10869-SSB, 10454-SSB,
9:30-9:45 p.m. 9:30-9:55 p.m. 9:30-10:00 p.m. 9:30-10:00 p.m. 9:30-10:00 p.m. 9:30-10:15 p.m. ( 9:30-10:25 p.m.	0230-0245 0230-0255 0230-0300 0230-0300 0230-0300 +) 0230-0315 0230-0325	R. Pakistan R. Tirana RAE, Argentina R. Sweden R. Lebanon R. Berlin International R. Nederland	C B C B D C A	6190 (Sat.) 21470, 21595, 17840 9750, 7120 15345, 11710, 6060 (not Mon.) 11705, 15420, 17840-SSB 11955† 11975, 11890, 11840, 9560 9590, 6165 (Mon. 0230-0320)

## PREVEN HEADACHES

Our Isolators eliminate equipment interaction,



clean up interference, curb damaging power line spikes and lightning bursts.

#### ISO-1 Isolator

3 isolated sockets; quality spike suppression; basic protection. . . \$76.95

#### ISO-3 Super-Isolator

3 dual isolated sockets; suppressor; commercial protection.....115.95

#### ISO-17 Magnum Isolator

4 quad isolated sockets; suppressor; laboratory grade protection...200.95

#### Electronic Specialists, Inc.

171 S. Main St., Box 389, Natick, MA 01760

Toll Free Order Desk 1-800-225-4876 MasterCard, VISA, American Express

Circle No. 51 on Free Information Card

# SEE YOUR DEALER TODAY

FROM



HERE'S A TIP THAT'S PERFECT!

AM/FM AUTO RADIO AND CB

## 'Firestil

**GOLDEN SERIES** 

BARE-HANDS TUNABLE "NO TOOLS NEEDED" HIGH PERFORMANCE ANTENNAS

> ALSO ANTENNAS FOR CORDLESS TELEPHONES MONITOR SCANNERS

Dealer & Distributor Inquiries Invited SEND FOR FREE CATALOG

Firestik' Antenna Company 2614 East Adams/Phoenix, AZ 85034

Street City

Serving the CB and
Communications Market Since 1962.

**5-YEAR REPLACEMENT WARRANTY** 

Circle No. 26 on Free Information Card

#### CALCULATOR SAVINGS





imal 99.99	
og 149.99	82161A Cassette Drive .\$347.99
mory . 207.99	82162A HP-IL Printer 347.99
ase 79.99	82163A Video Interface 169.99
10 pts 146.99	82169A HP-IB Interface 349.99
ader 149.99	82180A Extnd Functns 59.99
289.99	82181A Extnd Memory 59.99
99.99	82182A Time Module 59.99
er 739.99	82183A Extnd I/O 59.99
for 75C 149.99	82184A Plotter ROM 59.99
odule 94.99	HP-97 Desk Progrmble . 599.99

	Call for Low Prices on all Accessories	and Software
Extend	nstruments 99/4A Computer \$149.99 ed BASIC Module 74.99	\$50 TI
Disk C	eral Expansion Box	REBATE
	ct Computer 40199.99	ON 99/4A
Olivetti	Praxis 35 Triple-pitch Electronic Typ	ewriter \$349.99
Sharp	PC-1250 Pocket Extended BASIC Cor- CE-125 Printer/Microcassette for PC- PC-1500 Advanced Handheld Compu CE-150 Cassette Intric/4-color PIC- E-151 4K Memory Expansion for PI CE-155 8K Memory Expansion for PI CE-158 BK-2220 & Parallel Interface CE-159 8K Memory Expans with Bat	-1250
Casio	FX-702P Handheld Computer, 1860 2 FA-2 Cassette Interface for FX-702P FP-10 Printer for FX-702P	39.99 59.99 59.99 59.99 59.99 69.99 70.299.99 70.599.99 70.99
Pearl- corder	S904 Two-speed, Two-hour Records S901 Two-speed, Two-hour, Tape C S801 Two-speed, Compact, Memory X-01 Ultra-thin All Electronic SR-11 FM Stereo Microcassette w/l Olympus Pearlcorder Microcassette	ounter
Use c	ashier's check, postal money order, VISA, or M/C. P ar. Add shipping: 1% of your order (\$3.95 minimum).	rsnl checks take five weeks
CA re	s add 6%. Subject to availability. USA prices.	
TOLL	BOO-421-5188 Information line (213) 633-326	Outside CA, AK, HI

Tam's Inc, Dept CE-8 14932 Garfield Ave. Paramount, CA 90723 (213) 633-3262 Circle No. 42 on Free Information Card



#### **CONVERTERS**

**Largest Selection** of Equipment Available

\$ Buy Warehouse Direct & Save \$



36 channel converter **\$45**95

36 channel wired remote converter only \$8895



Send \$2 for complete catalog of converters and equipment

Quantity Discounts • Visa • Master Charge Add 5% shipping—Mich. residents add 4% sales tax

**C&D Electronics, Inc.** P.O. Box 21, Jenison, MI 49428 (616) 669-2440

#### ...ENGLISH BROADCASTS

ENGEION BIT	CABCACTC		
9:30-10:30 p.m. 0230-0330	BBC	Α	(15070 from 0300) 11750, 9915, 9515, 9410, 7325, 6175,
9:51-9:58 p.m. (+) 0251-0258 10:00-10:25 p.m. 0300-0325	V. of Yerevan R. Polonia	B C	6120, 5975 17900, 17870, 15180 15120, 11815, 9525, 7270, 7145,
10:00-10:25 p.m. 0300-0325	R. Mexico	С	6135, 6095 (length varies) 17765, 15430, 11770, 9705, 5980
10:00-10:30 p.m. (+)0300-0330	R. Budapest	В	(Sun.) 17710, 15220, 11910, 9835, 9585, 6025 (Mon; 0300-0312 Wed. & Sat.)
10:00-10:30 p.m. 0300-0330 10:00-10:30 p.m. (+)0300-0330	R. Japan R. Canada International	C	17755 9755, 5960
10:00-10:30 p.m. 0300-0330 10:00-10:30 p.m. 0300-0330	R. Portugal R. Australia to Antarctica	BC	11925, 9765 17750 (Fri.)
10:00-10:50 p.m. 0300-0350 0300-0355 p.m.	V. of Free China R. Prague	C B	17800, 15345, 11825 11990, 11970, 9740, 9630, 9540, 7345, 6015, 5930
10:00-10:55 p.m. 0300-0355 10:00-11:00 p.m. 0300-0400	R. Beijing VOA	B	17855, 17680, 15520 21460, 17740, 9670, 7200, 6040 5055, (Mon. 0235-0435)
10:00-11:00 p.m. 0300-0400 10:00-11:00 p.m. 0300-0400 10:00-11:00 p.m. 0300-0400	TIFC Costa Rica V. of Free China R. Baghdad	C A D	5055, (Mon. 0235-0435) 5985 (via WYFR) Some of: 21585, 15400, 11935,
10:00-11:00 p.m. 0300-0400	HRVC, Honduras	В	9745 4820 (Mon.)
10:00-11:00 p.m. 0300-0400 10:00-11:00 p.m. 0300-0400	R. Uganda V. of Turkey	B B	15325 (irregular)
10:00-11:26 p.m. 0300-0426 10:00-11:30 p.m. 0300-0430	R. RSA VOA to Africa	C A	17760, 11740 9585, 7270, 5980, 4990, 3230 15752-USB, 15240, 15185, 15175, 10877.5-USB, 10869-USB, 7280,
10:00-12:00 p.m. 0300-0500 10:00 p.m2:00 a.(+) 0300-0700	WRNO, New Orleans R. Moscow	A A	6035 6185 (not all Eng.) 17900, 15425, 15180, 15100,
10.05			(12050 from 0330; 11750 and 11710 from 0530)
10:25 p.mfade 0325- 10:30-10:55 p.m. 0330-0355	R. One, Zimbabwe R. Tirana	В	3396 (exc. Sun.) 7300, 6200
10:30-10:57 p.m. 0330-0357 10:30-11:00 p.m. 0330-0400	Austrian Radio U.A.E. Radio, Dubai	C B	9770, 5945 17775, 15300 (length varies)
10:30-11:30 p.m. 0330-0430 10:30-11:30 p.m. 0330-0430	R. Cultural, Guatemala BBC	B	3300 (Mon. 0030-) 15070, 12095, 9410, 6175, 5975
10:30 p.m1:00 a.m. 0330-0600 10:40-10:47 p.m. 0340-0347	R. Habana Cuba V. of Greece	A B	11760, 17735 11645, 9865, 9420 (not Sun.)
10:50-11:10 p.m. 0350-0410 11:00-11:30 p.m. 0400-0430	RAI, Italy R. Bucharest	BC	17795, 15330, 11905 11940, 11810, 9690, 9570, 9550,
11:00-11:30 p.m. 0400-0430	R. Norway	C	6155, 5990 15175, 11870, 9610 (Mon.)
11:00-11:55 p.m. 0400-0455 11:00-12:00 p.m. 0400-0500	R. Beijing R. Sofia	B B	17680, 15120 11860†
11:00-12:00 p.m. 0400-0500 11:00-12:00 p.m. 0400-0500	V. of Nicaragua R. Australia	B B	5950 21680, 21650, 17795, 15320, 15160
11:00-12:00 p.m. 0400-0500 11:00 p.m1:00 a.m.0400-0600	FEBA, Seychelles VOA	C	11800, 15200 (Sat. & Sun.) 15205, 9670, 7200, 6040, 5995
11:00 p.m1:00 a.m.0400-0600 11:15 p.m11:30 p.m.0415-0430	TWR, Bonaire R. France Int.	A B	9535, 800 (length varies) 7135, 11735, 11875
11:30-11:57 p.m. 0430-0457 11:30-12:00 p.m. 0430-0500	Austrian R. VOA to Africa	B A	15165, 11665 15752-USB, 15240, 15185, 15175,
11:30-12:00 p.m. 0430-0500 11:30-12:00 p.m. 0430-0500	Swiss R. International RAE Argentina	ВС	10869-USB, 7280, 6035 11715, 9725 15345, 11710, 6060 (not Mon.)
11:30 p.m12:45 a.m.0430-0545 11:30 p.m1:00 a.m.0430-0600	BBC AFRTS, Los Angeles	A	15070, 12095, 9510, 9410, 7160, 6175, 5975
11:30 p.m1:30 a.m.0430-0630 11:45-12:00 p.m. (+)0445-0500	TWR, Swaziland R. France International	CB	11790, 15330, 6030 7925, 3200
11:55 p.m3:00 a.m.0455-0800 12:00-12:15 a.m. 0500-0515	V. of Nigeria Kol Israel	В	9795, 11735, 11875 15185, 15120
12:00-12:20 a.m. (+)0500-0520 12:00-12:30 a.m. 0500-0530	Vatican Radio	всссс	21710, 15585, 12025, 15105, 9815, 6185, 9645, 11725, 15190
12:00-12:30 a.m. 0500-0530 12:00-12:45 a.m. 0500-0545	R. Japan R. Norway	000	15300 17840, 15175, 11870 (Mon.)
, 12:00-12:50 a.m. 0500-0550	R. Nationale, Cameroons V. of Germany	Α	9745 11905, 11705, 9690, 9545, 5960
12:00-1:00 a.m. 0500-0600	R. Korea R. Australia	C	15575, 11820, 11810 21680, 17870, 17725, 15240, 15160
12:00-1:00 a.m. 0500-0600 12:00-2:00 a.m. 0500-0700	VOA HCJB Ecuador	A	15752-USB, 15345, 15185, 10869-USB, 7280, 6035
12:00-3:00 a.m. 0500-0800 12:00-3:00 a.m. 0500-0800	R. Kuwait	ВС	11910, 9745, 6095 15345
12:30-12:40 p.m. 0530-0540	R. Nigeria, Kaduna R. Garoua, Cameroon	BC	4770 (not all Eng.) 5010
12:00-5:00 a.m. 0500-1000 12:30-1:00 a.m. 0530-0600	WRNO, New Orleans R. Portugal	A	6185 (Sun) (not all Eng.) 9575, 6075†
12:30-fade 0530- 12:30-1:15 a.m. (+) 0530-0615	R. Ghana R. Berlin International	СВ	3366 (4915 from 0600) 11890, 9560
12:30-1:25 a.m. 0530-0625 12:30-1:30 a.m. 0530-0630	R. Nederland Spanish Foreign R.	A B	9715, 6165 (Mon. 0530-0620) 11880, 9630
12:45-1:00 a.m. 0545-0600 12:45-2:30 a.m. 0545-0730	UN Radio BBC	B B	15105, 11740 (Sat.) 15070, 11955, 9640, 9510, 9410,
12:55-3:25 a.m. 0555-0825 1:00-1:30 a.m. 0600-0630	V. of Malaysia	C	7150, 6175 15295, 12350, 9750
1:00-1:30 a.m. 0600-0630	V. of Germany R. Australia	000	21680, 17795, 17755, 15160, 9570
1:00-2:00 a.m. 0600-0700	AFRTS, Los Angeles VOA	B A	15295, 12350, 9750 17875, 15275, 11905, 11765, 9700 21880, 17795, 17755, 15160, 9570 17765, 15330, 11790, 6030 15205, 9670, 7325, 7200, 6060, 6040, 5995
1:00-2:30 a.m. 0600-0730 1:00-2:30 a.m. 0600-0730	R. Kiribati Solomon Isl. Broadcasting	CC	16433-SSB (not all English) 9545 (time varies) (not all English)
1:00-2:30 a.m. 0600-0730	VOA to Africa	Α	15752-USB, 15345, 15330, 11915, 10869-USB, 9530, 7280, 6125,
1:00-3:00 a.m. 0600-0800 0600-0900	WYFR R. Cook Islands	A D	6080, 6035 15130, 11805, 9680 11760, or 9695 or 5045
1:10-2:10 a.m. 0610-0710 1:15-1:30 a.m. 0615-0630	V. of Free China R. Canada International	A B	(not all Eng.) 5985, via WYFR 11960, 11825, 11775, 9760, 6140
1:25-3:40 a.m. (+) 0625-0840 1:30-1:45 a.m. 0630-0645	TWR, Monte Carlo RTVC, Congo	B C	(Mon-Fri) 9492.5 (Sun. 0625-1000) 9715 (MonFri.) (irr.)
			Control of the contro

1:30-2:00 a.m.	0630-0700	R. Australia	В	21680, 17870, 17725, 15240, 15160, 15115, 9570
1:30-2:00 a.m.	0630-0700	Radio Polonia	В	9675, 7270
1:30-2:30 a.m.	0630-0730	R. RSA	Č	17780, 15220, 11900
1:30-2:00 a.m.	0630-0800	R. Habana Cuba	Ä	11725
1:45-2:00 a.m.	0645-0700	R. Canada International	В	11960, 11825, 11775, 9760, 6140
1.45-2.00 a.m.	0043-0700	11. Canada international	D	(MonFri.)
1:57-4:55 a.m.	0657-0955	V. of Philippines	C	9578 (not all English)
2:00-2:15 a.m.	0700-0715	R. Japan	č	15300, (15235 via
2:00-2:15 a.m.	0/00-0/15	n. Japan	C	Portugal)
0.00 0.00	0700-0720	R. Nederland	_	21480, 15560, 11930, 9895
2:00-2:20 a.m.			C	
2:00-2:30 a.m.	0700-0730	Swiss Radio International	CCC	21520, 15305, 9560, 9535,
2:00-3:00 a.m.	0700-0800	ELWA, Liberia	C	11830
2:00-3:00 a.m.	0700-0800	V. of Vietnam	C	9840
2:00-3:30 a.m.	0700-0830	HCJB, Ecuador	C B C	11835†, 9720†
2:00-4:00 a.m.	0700-0900	R. Australia	В	15115, 12290-SSB (9570 to 0800)
2:00-6:00 a.m.	0700-1100	HCJB, Ecuador	C	11925, 6130, (9745, 0700-1030)
2:10-2:15 a.m.	0710-0715	UN Radio	Α	17815, 15195, 11875, 9555 (Sat.)
2:30-3:25 a.m.	0730-0825	R. Nederland	BBCCCBC	9770, 9715
2:30-4:00 a.m.	0730-0900	BBC	В	15070, 11955, 9640, 9510
2:30-6:30 a.m.	0730-1130	Solomon Isl. Broadcasting	C	5020 (not all Eng.)
2:30-9:00 a.m. (-)	0730-1402	ABC Melbourne	C	9680
2:30 a.mfade	0730-	Action Radio, Guyana	C	5950
2:45-4:30 a.m.	0745-0930	KTWR, Guam	В	11840
3:00-3:15 a.m. (+)	0800-0815	AWR, Portugal	C	9760 (Sun.)
3:00-3:15 a.m.		UN Radio	Α	17860, 15235, 15120,11740 (Sat.)
3:15-3:30 a.m.	0815-0830	R. Vanuatu	D	7260, 3945
3:30-4:25 a.m.	0830-0925	R. Nederland	B	9715
3:30-5:00 a.m.	0830-1000	FEBC, Philippines	Ċ	11890
3:30-7:15 a.m. (-)	0830-1215	R. New Zealand	Ċ	15485, 9620
3:45-4:45 a.m.	0845-0945	R. Japan	Č	15235, 11875
24 Hours	24 Hours	CFRX, Toronto	Č	6070
24 Hours	24 Hours	WWV, Colorado	A-B	20000, 15000, 10000, 5000, 2500
24 110013	L+ 1 louis	TTTT, Colorado	7.0	20000, 10000, 10000, 0000, 2000

**ExplanatoryNotes** 

Times in first column are CDT. For EDT add 1 hour; MDT subtract 1 hour; PDT subtract 2 hours. Days of week are in GMT

are in GM1.

2. Quality. A—Strong signal and very reliable reception. B—regular reception. C—occasional reception under favorable conditions. D—rarely audible. These ratings are for locations in the central USA. European and African stations are in general, more reliably received in eastern North America. Asian and Pacific stations are more reliably received in western North America. North American stations are received well except in areas too close to the

3. The information in the listing is correct to press time. However, frequencies and schedules are constantly changing. Listen to "SWL Digest" on R. Canada International for late changes, Friday at 2240 Saturday at 2135; Sunday at 1930; GMT Mondays at 0206; and to "World of Radio" on WRNO, GMT Sundays at 0230 and 2330. 4. R.—Radio; V.—Voice

= frequent changes

time one hour later after DST period (Europe, last Sunday in Sept.; Soviet Union, Oct. 1; Canada and USA last Sunday in Oct.)

(-) = time one hour earlier during southern hemisphere DST (starting last Sunday in Oct.)

BY LASER RAY GUN — Intense visible red beam, burn is the hardest metals, HAZARDOUS device, Kits availat includes part evice. RUBY LASER RAY GUN ASE CARBON DIOXIDE BURNING AND CUTTING LASER — produces a continuous beam of energy, HAZARDOUS device — Kits a able. LC5...PLANS... includes part sources... \$1: VISIBLE LASER LIGHT GUN — produces intense red beam RS special effects and other various optical applications. Hand-held enclosure houses batteries.

enclosure houses batteries.

LGU3 PLANS \$1.00 LGU3K KIT/PLANS (minus tube) \$99.50

IR PULSED LASER RIFLE — produces 15-30 watt pulses at 9000A at 200-2000 per second.

LRG3 PLANS \$10.00 LRG3K KIT/PLANS (minus diode) \$119.50

BEGINNER POCKET LASER — visible red simulated device produces an excellent monochromatic source of light.

LHC2 PLANS \$5.00 LHC2K KIT/PLANS \$24.50

HIGH ENERGY VARIABLE AND PROGRAMMABLE PAIN FIELD GENERATORS. REQUIRE NO CONTACT — Recently developed device produces directional fields of moderate to high SPL capable of producing intense pain and discomfort. HAZARDOUS IF NOT USED WITH DISCRETION. SOLD FOR ANIMAL CONTROL— MAY BE USED IN CERTAIN INSTANCES TO DISCOURAGE UN ASO MAY BE USED IN CERTAIN INSTANCES TO DISCOURAGE UN-WANTED ENCOUNTERS

PPF1 PROG/VAR PLANS \$15.00 PPF1K KIT/PLANS \$175.00 PSP3 VAR HAND-HELD PLANS \$7.00 PSP3K KIT/PLANS \$44.50 RS

PHASOR BURNING WAND — capable of burning flesh, generates 3500 volts of continuous DC power.

PSW3 PLANS . \$8.00 PSW3K .KIT/PLANS . \$59.50

PARALYZING SHOCKING WAND — produces 100,000 watto

G1W PERSONAL DEFENSE

SNOOPER PHONE — allows user to call his premises and listen

SNOOTE FROM THE ANALYSE AND SHEET IN SHEET IN SHEET IN WITHOUT THE SHEET AND SNP2K... KIT/PLANS... \$49.50 LONG RANGE WIRELESS MIKE — miniature device clearly C ransmits over 1 mile.

FBT9... PLANS... \$7.00 FBT9K... KIT/PLANS... \$34.50 WIRELESS TELEPHONE TRANSMITTER — long range all auto-R

matic, undetectable.

WWPM5. PLANS. \$7.00 VWPM5K. KIT/PLANS. \$34.50

TALK AND TELL — clearly and automatically records both sides of a telephone conversation when phone is being used.

TAT2K. KIT/PLANS. \$14.50 TAT20. READY TO USE \$24.50

Our order phone is available 24 HOURS, 7 DAYS A WEEK. Write for FREE catalog of our many products

We accept Master Charge or Visa. Please ping. On orders OVER \$50.00 WE PAY freig Please allow 10% for ship-

SEND TO: SCIENTIFIC SYSTEMS

DEPT. Q1, P.O. BOX 716 AMHERST, NH 03031

OR CALL FOR ORDERING ONLY: 1-603-673-4730

#### FIRST QUALITY COMPONENTS -**NOT MAIL ORDER "SECONDS"**



cam actuated, true zero insertion – tin plated solder tail pins – capable of being plugged into dip sockets, including wire wrap.

Stock No. of No. Pins 1-9 10-49 50 11055 24 4.98 \$4.35 \$3.90 11056 28 5.15 4.50 4.05 11057 40 6.81 5.95 5.35 11058 64 12.02 10.50 9.45 (m)

2





032

DIGITAL MULTIMETER



TI WIRE

SOCKETS

WRAP

vrap	n.	SELEL OF	with g
	100		Stock
1-99	-499	500	No. P
\$ 40	\$.36	\$.30	11201
.59	.54	.45	11202
.64	.58	.48	11203
.73	.66	.55	11204
.99	.90	.75	11205
1.12	1.02	.85	11206
1.25	1.14	.95	11207
1.52	1.38	1.15	11208
2.05	1.86	1.55	11209

Send for Free Catalog - over 1100 parts. TI LOW PROFILE

SOCKETS

Tin plated

copper alloy 688 contact pins th gas tight seal. No Pins 1-24 25-99 999 \$.10 \$.09 \$.08 .14 .13 .12 20 22 24

#### **ELPAC POWER SUPPLIES - DC/DC CONVERTERS**

Stock No. 12098

WILD ROVER



- "Floppy Disc"
Power Supply For Winchester Drives

\$109.00 13801-1 Data Sheet for 13801 . . . .25

| ELPAC | Input | Output | Dimension | Output | Dimension | Output | CHAWTO | Output .48x.51x3.05 \$ 7.95 .48x.51x3.05 7.95 .48x.51x3.05 7.95 .48x.51x3.05 7.95 .48x.51x3.05 7.95 W TYPE: 13831 13832

1-9

CL3801 4.0-7.0 12±0.6 125 651x1.
CL3811 4.0-7.0 -12±0.6 125 .651x1.
CL3802 4.0-7.0 15±0.7 100 .651x1.
CL3812 4.0-7.0 -15±0.7 100 .651x1.
CL3804 4.0-7.0 28±1.4 50 .651x1.
DATA SHEET FOR DC/DC CONVERTERS 125 .651x1.2x1.77 \$24.95 125 .651x1.2x1.77 24.95 100 .651x1.2x1.77 24.95 100 .651x1.2x1.77 24.95 50 .651x1.2x1.77 24.95

4-7/16x4x2 4-7/16x4x2 4-7/16x4x2 4-7/16x4x2 4-7/16x4x2 5-5/8x4-7/8x3-3/16 5-5/8x4-7/8x3-3/16 5-5/8x4-7/8x3-3/16

#### Special of the Month!

BREAKABLE SOCKET STRIPS WITH MACHINED **COLLET PINS!** 

PIN FORMING TOOL

puts IC's on their true row to row spacing. One side is

squeeze.

gold collet/tin shell, wire wrap No. Pins Style Each

for 300 centers, Flip tool over for devices on .600 centers. Put device in too .600 centers. Put device in tool and

## 

eatures gold 10240 25 Solder tail \$1.75 10241 25 Wire wrap 3.25

DOL MAN

#### **ELPAC POWER SUPPLIES - SOLV SERIES FULLY REGULATED** (HxWxD) in Inches



" a estreitrische er

| ELPAC | Output | Ou OK MACHINE AND TOOL

> IC INSERTION/ Stock No. \$37.74



SOCKET WRAP ID

Fixed included Fixed included Fixed included Fixed included OVP-4 59.95 OVP-4 59.95

\$1.82 per pack

NEW! Stock No. 10200 \$14.95 (ANTI-STATIC MODEL) ONE TOOL DOES 8 thru 40 PINS! Stock No. 11059 \$12.95

#### IC EXTRACTOR

One-piece, spring steel con-struction.WillextractallLSI,MSI and SSL devices with 8 to 24 pins. Stock No. \$2.10



D

1

Miniclamp AC Volt-Ammeter allows singling one conductor out of many without disarrangement.

- 6 SET 01 \$99.00 Stock No. AC Amperes Price 13730 0-25A \$39.50 13731 0-50A 39.50 13732 0-100A 39.50 0-25A \$39.50 0-50A 39.50 0-100A 39.50 10

ACCESSORY LINE SPLITTER
allows fast readings of AC power consumption of plug in equipment without separation of leads. Stock No. 13727 \$9.95

for all types of small batteries from 1.35v to 4.5v Stock No. 13733 \$13.95

Stock No. 13733 \$13.95 VOLT-I-CATOR

automotive diagnostic meter plugs into lighter socket and indicates bat-tery condition and charging rates.

Stock No. 13736 \$15.95

AC VOLTAGE TESTER plugs into any 110v service receptacle to check line voltage over 50-150 VAC

Stock No. 13735 \$14.95 VOM-MULTITESTER

versatile Volt-Ohm-Milliammeter in small package Stock No. 13729 \$13.95

co.

**Drawer Q Milford** NJ 08848-9990





TOLL 800-526-5960 We ascept VISA MC. O.D. CHECK OF M. D. CHARGES OF THE IN NJ (201) 996-4093 STO. 16350. - \$4.00

乏



#### COMPUTER-PERIPHERAL SWITCHERS

COUNTO LET — TENTIFICATION OF THE ALGORITHM A SWILL OFFICE AND A COUNTY OF THE ALGORITHM AND A C

RS232 SERIAL SELECTO-SWITCH  • Switches all lines of asynchronous data • Easy expansion o serial ports • Connectors are female DB25 type					
PART NO.	DESCRIPTION	PRICE			
GRS232-AB	2-Way Switch	\$139.95			
GRS232-ABC	3-Way Switch	\$179.95			

• TRS-80, Apple, and IBM compatible • Switches 24 lines (li 1 is ground) • Connectors are female DB25 type					
PART NO.	DESCRIPTION	PRICE			
GP24-AB	2-Way Switch	\$139.95			
GP24-ABC	3-Way Switch	\$179.95			
CENTRONI	CS-STYLE SELECTO	-SWITCH			

#### Switches all 36 lines PART NO. DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION 2-Way Switch . . . . . \$199.95 GCENT-AB

#### Micro-Logic Corp. MICRO-CHARTS



\$229.95

Fully decoded data • Instant access • 2-sided, totally comprehensive • Compact \$x11 in. durable credit card piastic • Perfect for programmers & engineers Clear & concise tables for full instruction set, disassembly, ASCII, base conver-in, effect of flags, compare vs. jump, interrupt structure, pinout, cycle times,

PART NO.	otes, & much more  REFERENCE PRICE
ML-Z80	Z80 CPU\$5.95
ML-8080A	8080A/8085A
ML-6502	6502 (65XX)\$5.95
ML-8048	8048, Relatives, Algorithms \$5.95
ML-7400	5400/7400 TTL

BOOKS

	DOOKS
30001	National CMOS Data Book (1981)
30003	National Linear Data Book (1982)\$11.95 (1376 pages) LM, LF, ADC, DAC, LH Series
30008	National Memory Data Book (1980)\$6.95 (464 pages) RAMs, ROMs, PROMs, EPROMs Series
30009	Intersil Data Book (1983)\$9.95 (1356 pages) Complete line.
30010	National Audio/Radio Handbook (1980)
30011	National Linear Application Handbook (1980) \$15.95 (736 pages) Application Notes, Linear Briefs, etc.
30012	National PAL Data Book (1982)
30013	Zilog Data Book (1983)
210830	Intel Memory Components Handbook (1983) \$14.95 (798 pages) Contains all Application Notes, Article Reprints, Data Sheets, and other design information on Intel's RAMs, EPROMs, E*PROMs, & Bubble Memories.
210844	Intel Microprocessor & Peripheral Handbook (1983) \$14.95 (1027 pages) Contains Data Sheets on all of Intel's Microprocessors and Peripherals.

#### ATARI



ATARI PADDLES

JSP (2) .....\$4.95 pair

ATARI DRIVER

JSD(1) .....\$2.95 ea.



TV GAME SWITCH Used on Atari. Cosmetically blemished. 100% functional.

TGS-1 . . . \$2.95 ea.

Computer Keyboard Enclosures

#### ameco Digital Thermometer Kit



DTE-11 Panel Width 10.13"
DTE-14 Panel Width 13.5"
DTE-20 Panel Width 19.25"

\$34.95

1	"DTE" Blank Desk-Top Enclosures are designed for easy modifica- tion. High strength epoxy molded end pieces in mocha brown finish,
- Live	end pieces in mocha brown finish . Sliding rear/bottom panel for service/ component access: Top/bott. panels .080'r thick alum. alodine type 1200 finish (gold tint
	color) for best paint adhesion after modification. Vented top & bottom panels for cooling efficiency. Rigid construction provides unlimited applications. Assembly instructions included.
DTE-8 Panel Width	

#### TIMEX SINCE IN 1000

\*Powerful - fully programmable 2K memory \*Portable - 6%" × 6%" × 1%" - 12 oz. \*Expandable - Optional 16K RAM module \*Single-key entry commands \*Educational \*Unique syntax-check report codes for error identity \*Accurate to 9% decimal places for full range math and scientific functions \*Graph drawing and animated display \*Advanced 4-chip design combining power, portability and affordable price.



TS1000......\$54.95

AC	CCESSORIES	FOR	TIMEX	sinclair	1000	and Z	X81
TIMEX	sinclair	1016	Expansion fr	om 2K to 16K, size: 3" x 3"	"x 1.5" (5 oz)	TS1016	\$49.95
			32 column ti	hermal printer (4 lbs)		TS2040	\$99.95
TIMEX	sinclair	2040	Printer pape	r - 3 rells (4.3 in. x 82 ft	.)	TPP-3	\$5.95

#### Keyboard Mask for Your ZX81/1000\* Computer



JE681 KEYBOARD MASK

...\$9.95 each

The JEBS Keyboard Mask provides users of the ZX81/1000 series computer the individual feel of each keypad on the keyboard. The mask has a raised outline around each keypad allowing the user to feel and correctly position their fingers onto the

JE681 KEYBOARD MASK

\*ZX81/1000 is a trademark of Sinclair/Timex

#### ameco

ZX81/1000\* Keyboard Conversion Kit



E682-AK Keyboard Conversion WITH DTE-AK CASE - AS PICTURED)	Kit .	\$99.95	ea.
E682 Keyboard Conversion Kit		\$59.95	ea.

#### 80-Key Keyboard



95-Key Keyboard



CA154A . . . . . . . . \$79.95

#### **CONTROL DATA KEYBOARDS**

- \* 7-bit Parallel ASCII
- \* SPST Switching
- \* FTZ Shielded Base
- \* N-Key Rollover \* 128 Character ASCII
- \* Non-Slip, Non-Glare Keycaps
- ★ CDC752 Terminal Keyboards
- \* Attractive Case

These Control Data Keyboards consist of a base, cover, the keyboard assembly, and an interface cable. Color (case): Harvest gold and black. Color (keycaps): Black, blue, and red. Electrical requirements: +5V @ 600mA, -12V @ 50mA. Size: 21½"W × 9"D × 3½"H. Weight: 6 lbs. All units brand new in original boxes, specifications

## Keytronics 90-Key Soft-Programmable Keyboard WITH SECURITY KEYLOCK SWITCH

included

VISUAL 270







for Visual Technology, this keyboard features: a security keylock (includes two keys) to guard against thorized use; an 11-key numeric keypad; oursor controls; and 10 user-programmable keys. Electrical re-ments: +5VDC. Color (case); White. Color (keycaps): Black. Complete with case, keyboard assembly, th interface cable, and schematics. Weight: 7 lbs.

Part No. KB270 ..... \$79.95 each



Word Throcessing Keyboard, 26 Pin Edge Card Connection. Supply Voltage +5VDC. Main Keyboard is QWERTY. Additional Key Pads for Cursor and word processing functions.

Part No. 85SD18-1.



HI-TEK 14-KEY NUMERIC KEYPAD

SPST switching. Charcoal grey keycaps. Mounted on printed circuit board. Part No. K-14



.\$9.95 each POWER SUPPLY + 5VDC @ 1 AMP REGULATED Transaction Tech (/beige) self-enclosed 







POWER SUPPLY 4-Channel Switching - Apple Compatible
FOR USE AS AN EXTERNAL POWER SUPPLY FOR APPLE
Microprocessor, mini-computer, treminal, medical equipment and process centrol applications. Input: 99-130VAC 47-440H2. Output: +5VDC @ 5A. -5VDC @ 1A. +12VDC @ 1A. 12VDC @ 1A.
Line rag.: = 0.2 \*\*, Ripple: 30M\*\* Pp. Load regi. = 1\*\*. Overcurrent protection. Adj: 5V main output: 10%. 6-3/8\*\* L. x 1-7/8\*\* W. x 4-15/16\*\* H. WI. 1½ lbs.

\$69.95 each

\$10.00 Minimum Order — U.S. Funds Only California Residents Add 6½ % Sales Tax Shipping — Add 5% plus \$1.50 Insurance Send S.A.S.E. for Monthly Sales Flyer!

Spec Sheets — 30¢ each Send \$1.00 Postage for your FREE 1983 JAMECO CATALOG Prices Subject to Change

VISA®



1355 SHOREWAY ROAD, BELMONT, CA 94002 8/83 PHONE ORDERS WELCOME — (415) 592-8097 Telex: 176043



JE664 EPROM PROGRAMMER

8K TO 64K EPROMS — 24 AND 28 PIN PACKAGES

-PROGRAMS 2716's IN 16 SECONDS-PROGRAMS 2764's IN 64 SECONDS-

\*Programs, validates, and checks for propriety reased PROMEs - Emulster PROME or EPROMEs - RS22C Computer Interface for editing/program loading - Loads data into RAM by keyboard - Changes data in RAM by keyboard - Loads RAM from an EPROME - Compares EPROME for content differences - Copies EPROMEs - Power in 1111 - 1

JE664-A EPROM Programmer
Assembled & Tested (Includes JM16A Module) \$995.00

Assembled o resided (includes and los motions)

JE665 — RS232C INTERFACE OPTION — The JE665 RS232C Interface
Option implements computer access to the JE664's RAM. Sample software written in
BASIC provided for TRS-80" Model 1, Level II Computer. Baud rate: 9600. Word
Light: 8 bits – odd parify. Slop bits: 2. Option may be adapted to other computers. \$1195.00

Lym. 3 otts odd parify. Stop bits. 2. Option may be adapted to other compute JE664-ARS ERROM Prog. w.18685 option 31195.0. 31195.0. Sasembled and Tested (Includes JM 16A Module) EPROM JUMPER MODULES — The JE664's JUMPER MODULE (Person Wy Module) is a jurijen Module hat pre-sets JE664 for proper programming pulses the EPROM & configures EPROM socket connections for that particular EPROM. Part

EPROM **EPROM MANUFACTURER** PRICE AMD, Motorola, National, Intel, TI Intel, Motorola, National, NEC, TI Motorola, Ti (+5,-12, +12) Motorola, Ti AMD, Fujitsu, NEC, Hitachi, Intel 2708 2716,TMS2516 MCM68764, MCM68L764 Motorola Intel \$14.95 \$14.95 JM64B



#### iii's Black Hole **EPROM Eraser**

9 Chips — 8 Minutes

The Black Hole EPROME DEASY will completely and safely exise of PEROME in less than 8 minutes. The Back Hole is a fully automatic casettle loading reaser relating behavior. In the safely loading reaser relating behavior of the safely loading reaser relating parameter. In the safely loading reaser relating to the safely loading reaser relating to parabolic light turnel. In operation, the user signs in an arth-static Bug Box (7 as all oil) containing the EPROMs to be executed into the loading side of the front parameter. In the safely loading the safely loadin PART NO.

ULV-008 Replacement Lamp for ERS-008 . . . . .

#### ERS-008 Eraser, Auto Eject & LED Readout ..... \$249.95 **IBM MEMORY EXPANSION KIT**

#### SAVE HUNDREDS OF \$\$\$ BY UPGRADING MEMORY BOARDS YOURSELF!

Most of the popular memory boards allow you to add an additional 64K, 128K, 128K, or 256K. The IBM64K Kit will populate these boards in 64K byte increments. The kit is simple to install — just insert the nine 64K RAM chips in the provided sockets and set the two groups of switches. Directions are included.

IBM64K (Nine 200ns 64K RAMs) . . . . \$59.95

#### **EXPAND YOUR MEMORY**

TRS-80 to 16K, 32K, or 48K

\*Model 1 = From 4K to 16K Requires (1) One Kit

Model 3 = From 4K to 48K Requires (3) Three Kits

olor = From 4K to 16K Requires (1) One Kit

\*\*Model 1 equipped with Expansion Board up to 48K Two Kits Required

— One Kit Required for each 16K of Expansion —

TRS-16K3 \*200ns for Color & Model III . . . . . . . \$12.95 TRS-16K4 \*250ns for Model I.....

#### TRS-80 Color 32K or 64K Conversion Kit

Easy to install kit comes complete with 8 ea. 4184-2 (200ns) 64K dynamic RAMs & converts TRi-80 color computers with E circuit boards, & all new color computers to 32K. Minor modifications of 32K memory will allow the use of all the 64K of the dynamic RAM providing you have a FLEX DOS operating system. TRS-64K2 .....\$54.95

51/4" Mini-Floppy Disk Drive 574 WITHINGORY STATES TO THE PROTECTION OF THE P

Limited Quantity! FD250 ..... \$199.95 Double-sided, 35 tracks, 438K bytes capacity



#### **FLOPPY DISK DRIVE**



• Shugart 801R compatible
 Single-Sided

• 77 Tracks 400/800K Bytes Capacity
Industry Standard

The FDD100-8.8" Floppy Disk Drive (Industry Standard) reatures single or double density. Recording mode: FM single, MFM double density. Transfer rate: 250K bitsless, as the control of th

FDD100-8 . . \$169.95 ea.

#### TOLL FREE ORDERS • 1-800-826-5432 AK, HI, CA OR INFORMATION • (213) 380-8000

#### MINIATURE 6 VDC RELAY



SUPER SMALL SPDT RELAY; GOLD COBALT CONTACTS

RATED 1 AMP AT 30 VDC; HIGHLY SENSITIVE, TTL DIRECT DRIVE POSSIBLE, OPERATES FROM 4.3 TO V. COIL RES. 220 OHM

1 3/16" × 13/32" × 7/16" AROMAT # RSD-6V \$1.50 EACH 10 FOR \$13.50

#### 120V INDICATOR



75¢ EACH 10 FOR \$7.00 100 FOR \$65.00

#### METERS

1 MA

5/16" SQUARE \$5.50 EACH









13 VDC RELAY CONTACT: S.P.N.C. 10 AMP @ 120 VAC ENERGIZE COIL TO OPEN CONTACT...

COIL: 13 VDC 650 OHM SPECIAL PRICE \$1.00 EACH

#### KEY ASSEMBLY



CONTAINS 5 SINGLE-POLE NORMALLY OPEN SWITCHES MEASURES 3 3/4" LONG



CONTAINS 6 SINGLE-POLE NORMALLY OPEN SWITCHES MEASURES 4 1/4" LONG.

#### ..E.D.'S STANDARD JUMBO DIFFUSED

RED 10 FOR \$1.50 GREEN 10 FOR \$2.00 YELLOW 10 FOR \$2.00

FLASHER LED 5 VOLT OPERATION RED JUMBO SIZE \$1.00 EACH BI POLAR LED

2 FOR \$1.70 LED HOLDERS TWO PIECE HOLDER FOR JUMBO LED

10 FOR 65¢ 200 FOR \$10.00

#### POWER SUPPLY W/PRE-AMP



THIS SUPPLY WAS USED TO POWER WILL SUPPLY APPROX. 18 VDC AND INCLUDES A SMALL PRE-AMP TO BOOST SIGNAL LEVEL. RCA PLUGS FOR LINE IN/OUT.

\$4.50 EACH

SEND FOR FREE 40 PAGE CATALOG!

#### COMPUTER GRADE CAPACITORS

1700 mfd. 150 VDC \$2.00 1/2" DIA × 4 3/4" HIGH

3.600 mfd. 40VDC \$1.00 1 3/8" DIA. × 3" HIGH 6,400 mfd. 60 VDC \$2.50 1 3/8" DIA. × 4 1/4" HIGH

18,000 mfd. 75 VDC \$4.00 2 1/2" DIA. × 4 1/2" HIGH 22,000 mfd. 15 VDC

2" DIA. × 2 1/2" HIG 22,000 mfd. 40 VDC HIGH \$2.00 2" DIA. × 6" HIGH \$3.00 24,000 mfd. 30 VDC

1 3/4" DIA. × 4" HIGH \$3.50 31,000 mfd. 15 VDC 1 3/4" DIA. × 4" HIGH \$2.50 72,000 mfd. 15 VDC 2" DIA. × 4" HIGH \$3.50 180,000 mfd. at 6V 2 1/2" DIA. × 4 1/2" HIGH \$1.50

CLAMPS TO FIT CAPACITORS 50¢ ea

#### TRANSFORMERS

5.6 VOLTS at 750 MA 6 VOLTS at 150 MA 16.5 V. at 3 AMPS 18 V at 650 MA \$3.00 \$1.25 \$6.50 \$3.50 18 VOLTS at 1 AMP 18 V.C.T. at 2 AMP 24 VOLTS at 250 MA \$4.50 \$5.50 \$2.50 24 VCT at 1 AMP 42 V.C.T. at 1.2 AMP

#### DC WALL TRANSFORMER



ALL ARE 115 VAC

4 VDC at 70 MA	\$2.50
9 VDC at 225 MA	\$3.00
16.5 VAC at 10 VA	\$3.50
17 VAC at 500 MA	\$4.00
22 VDC at 60 MA	\$2.50

#### MINIATURE TOGGLE SWITCHES ALL ARE RATED 5 AMPS @ 125 VAC

S.P.D.T. (on-on)

S.P.D.T.

P.C. STYLE 75¢ EACH 10 FOR \$7.00

(on-off-on)

NON-THREADED

C.C. STYLE, NON-THREADED BUSHING. 75¢ EACH 10 FOR \$7.00

S.P.D.T. (on-on) SOLDER LUG TERMINALS. \$1.00 EACH

S.P.D.T. (on-on)

BUSHING. \$1.00 EACH 10 FOR \$9.00

(on-on)

(on-off-on)

SOLDER LUG TERMINALS. \$1.00 EACH 10 FOR \$9.00 100 FOR \$80.00

SOLDER LUG TERMINALS. \$2.00 EACH 10 FOR \$19.00 100 FOR \$180.00

## **LL'ELECTRONICS CORP LL'ELECTRONICS CORP**

OUANTITIES LIMITED MINIMUM ORDER \$10.00 USA: \$2.50 SHIPPING NO C.O.D.!

FOREIGN ORDERS:
 INCLUDE SUFFICIENT
 SHIPPING
 CALIF. RES. ADD 61/2%



QUALITY **SERVICE** AVAILABILITY



ACTIVE, YOUR **NUMBER ONE** CHOICE

## **Active Electronics**

We are the largest because we are the best. Over \$40 million in stack. The world's most complete hobbyist inventory.

Active Electronics is your one stop source for the widest variety of top quality semiconductors, microprocessors, memories, microcomputer systems, peripherals and electronic components.

NOW AVAILABLE! Absolutely FREE



Active's Newly Revised 1983 Spring/Summer Catalog

Whether you're a serious hobbyist. experimenter, student or professional you shouldn't be without it. Call for your free copy today.

Circle No. 50 on free information card or write: P.O. Box 8000, Westboro, Mass. 01581 CALL TOLL FREE: 1-800-343-0874 MASS. customers call (617) 366-0500

Circle No. 50 on Free Information Card

#### GET IBM-PC Capacity at a Fraction of IBM'S Price!

New NETRONICS 16 Bit EXPLORER 88-PC Kit Starts at Just 6899.95 -Accepts All IBM Peripherals.

It's truel Now you can enjoy the power of the IBM compatible keyboard...\$299.95 Intel 8088—the same microprocessor which powers the IBM-PC—and run any program compled for the IBM-PC...\$471ing at only \$399.95! 

Take this easy. low cost way to learn 16-bit 

Additional ROM required...\$35.00.

Take this easy, low cost way to learn 16-bit technology! Two-board system features:

1. 8088 mother board with 5-slot expansion

bus; accepts any hardware designed for

2. 64K memory board, expandable to 256K; with IBM compatible RS232 communicacations port.

Any disk-operating system which works on the IBM will work directly on the EXPLORER 88-PC, and all programs compiled for the IBM will run on it.

The system monitor ROM included in the Starter system features a user-friendly operating system that allows easy program generation and debugging. The commands include display/modify memory...display/modify registers...input/output data to 1/0 ports...block moves...single-step trace mode...go/run with optional breakpoint and register reports...cassette load/save with file labels...plus a complete system test program that tests and reports condition of ROM, RAM, cassette interface, timer, DMA controller, inter-rupt controller, and the communications port. These test programs not only allow easy debug-ging of software but they serve as hardware and software learning tools.

The EXPLORER 88-PC STARTER KIT includes a mother board, memory/I/O board, all components needed, sockets for IC's used, one 62-pin bus connector and complete assembly/test instruc-tions. All you need is a soldering iron, solder, a power supply, and a standard RS232 terminal (Netronics has 2 low-cost ones to choose from).

Explorer 88-PC Starter Kit...\$399.95 + 10.00 p&i (wired & tested, add \$100.00) Extra 62-pin connectors at \$4.25 ea. + 1.00 p&i.

Use your own terminal with the EXPLORER 88-PC or, if you plan to expand it to be fully IBM compatible, we offer our IBM compatible keyboard and an IBM compatible color graphics board (see page 148). (only available wired and tested).

Set your own pace! Invest and learn, at the rate YOU want! Add to your EXPLORER 88-PC:

Deluxe heavy-duty steel cabinet that houses either two 5%" floppies or a 5%" hard disk with one floopy. This cabinet features a brush-finish front panel and a wood-grained

EXPLORER 88-PC Cabinet...\$199.95 + 18.00 p&i.

A heavy-duty open frame power supply with fan that can be used in your own cabi net or installed into the Netronics cabinet is available as follows:

□ 10 amp power supply for system + 2 flop-pies...\$149,95 + 8.00 p&i. □ As above + extra power for 1 hard disk... \$169.95 + 8.00 p&i.

S169.95 + 8.00 p&i.

JIBM compatible disk controller board. Controls four 5¼" floppy drives (w/2 drive cable). Available wired and tested only...

S250.00 + 8.00 p&i.

Monitors and BIOS source listings: available on either disk or hard copy at \$35.00.

Please specify format and system required.

INTEL 8086/8088 user manual...\$15.00 + 1.50.86

□ Amount enclosed

Acct. No.

Signature PRINT NAME

THE 8086 BOOK by RECTOR & ALEX... \$16.00 + 1.50 p&i.



Special IBM compatible system: with keyboard, color graphics board, floppy disk controller, 64K RAM, cabinet, standard power supply and a single 5½" floppy drive... \$1899.95 + 25.00 p&i.

IBM compatible hard disks, built-in modern board, eprom burner, print buffer system plus more will be available shortly.

Over 100 EXCLUSIVE Products and Kits—including the 'Speak Easy' universal voice synthesizer, a Diagnostic card with builtinglic probe for the IBM-PC, terminals, monitors, the ELF and EXPLORER 85 computers, and much more, are described in our upcoming catalog. It's yours FREE if you check here



RD

CALL TOLL FREE 1-800-243-7428 for Charge Card Orders. In Conn., call 203-354-9375, Conn. res. add sales tax. TO ORDER BY MAIL, CHECK BOXES FOR PRODUCTS DESIRED AND MAIL ENTIRE AD TO:

NETRONICS R&D LTD.

OR OR	Charge my □ VISA Exp. Date	MASTERCAL
City	State	Zip

64K DYNAMIC \$595 200 NS

## TMM2016 2KX8 STATIC \$415

59.95 3.95 7.95

13.90

19.95

11.95

4.35 3.25

14.95

34.95

25.95 14.95

11.95 3.25 5.75 9.95 11.95 6.95 2.25

22.95 24.95 19.95

10.95

22.25 29.95 29.95 6.95 6.95

19.95

5.95

74LS00 74LS01

74LS02

74LS04

74LS05 74LS08

74LS09 74LS10

74LS11

74LS13

74LS15

6800

68000

6802

6808

6809

6820

6821 6828

6843

6809E

#### STATIC RAMS

2101	256 x 4	(450ns)	1.95
5101	256 x 4	(450ns) (cmos)	3.95
2102-1	1024 x 1	(450ns)	.89
2102L-4	1024 x 1	(450ns) (LP)	.99
2102L-2	1024 x 1	(250ns) (LP)	1.49
2111		(450ns)	2.49
2112		(450ns)	2.99
2114	1024 x 4		8/9.95
2114L-4	1024 x 4	(450ns) (LP)	8/12.95
2114L-3		(300ns) (LP)	8/13.45
2114L-2	1024 x 4	(200ns) (LP)	8/13.95
2147	4096 x 1	(55ns)	4.95
TMS4044-4	4096 x 1	(450ns)	3.49
TMS4044-3	4096 x 1		3.99
TMS4044-2	4096 x 1		4.49
MK4118	1024 x 8		9.95
TMM2016-200	2048 x 8	(200ns)	4.15
TMM2016-150	2048 x 8	(150ns)	4.95
TMM2016-100			6.15
HM6116-4	2048 x 8	(200ns) (cmos)	4.75
HM6116-3	2048 x 8	(150ns) (cmos)	4.95
HM6116-2	2048 x 8	(120ns) (cmos)	8.95
HM6116LP-4	2048 x 8	(200ns) (cmos)(LP)	5.95
HM6116LP-3	2048 x 8	(150ns) (cmos)(LP)	6.95
HM6116LP-2	2048 x 8	(120ns) (cmos)(LP)	10.95
Z-6132	4096 x 8	(300ns) (Qstat)	34.95

#### LP = Low Power Qstat = Quasi-Static

#### **DYNAMIC RAMS**

TMS4027	4096 x 1	(250ns)	1.99
UPD411	4096 x 1	(300ns)	3.00
MM5280	4096 x 1	(300ns)	3.00
MK4108	8192 x 1	(200ns)	1.95
MM5298	8192 x 1	(250ns)	1.85
4116-300	16384 x 1	(300ns)	8/11.75
4116-250	16384 x 1	(250ns)	8/11.95
4116-200	16384 x 1	(200ns)	8/12.95
4116-150	16384 x 1	(150ns)	8/14.95
4116-120	16384 x 1	(120ns)	8/29.95
2118	16384 x 1	(150ns) (5v)	4.95
4164-200	65536 x 1	(200ns) (5v)	5.95
4164-150	65536 x 1	(150ns) (5v)	6.95
	5V = sing	le 5 volt supply	

#### **EPROMS**

1702	256 x 8	(1us)	4.50
2708	1024 x 8		3.95
2758	1024 x 8	(450ns) (5v)	5.95
2716	2048 x 8	(450ns) (5v)	3.95
2716-1		(350ns) (5v)	5.95
TMS2516		(450ns) (5v)	5.50
TMS2716	2048 x 8	(450ns)	7.95
TMS2532	4096 x 8	(450ns) (5v)	5.95
2732	4096 x 8	(450ns) (5v)	4.95
2732-250		(250ns) (5v)	8.95
2732-200		(200ns) (5v)	11.95
2764	8192 x 8	(450ns) (5v)	9.95
2764-250	8192 x 8	(250ns) (5v)	14.95
2764-200	8192 x 8	(200ns) (5v)	24.95
TMS2564	8192 x 8	(450ns) (5v)	17.95
MC68764	8192 x 8	(450ns) (5v)(24 pin)	39.95
			35.53
	SV = Sin	gle 5 Volt Supply	

#### **EPROM ERASERS**

	Timer	Capacity Chip	Intensity (uW/Cm²)	
PE-14		6	5,200	83.00
PE-14T	X	6	5,200	119.00
PE-24T	X	9	6,700	175.00
PL-265T	X	20	6,700	255.00
PR-125T	X	16	15,000	349.00
PR-320	X	32	15.000	595.00

## **Z-80** 2.5 Mhz

	0.00
Z80-CTC	4.49
Z80-DART	10.95
Z80-DMA	14.95
Z80-PIO	4.49
Z80-SIO/0	16.95
Z80-SIO/1	16.95
Z80-SIO/2	16.95
Z80-SIO/9	16.95
4.0 MI	ız
780A-CDII	4 05

#### Z80A-CTC Z80A-DART 11.95 Z80A-DMA Z80A-PIO 16.95 4.95 Z80A-SIO/0 Z80A-SIO/1 16.95 16.95

16.95

#### Z80A-SIO/9 16.95 6.0 Mhz Z80B-CPU 11.95 13.95 13.95 Z80B-CTC Z80B-DART 19.95

Z80A-SIO/2

ZIL	OG
6132	34.95
8671	39.95

#### CRYSTALS 32.768 khz 1.95 1.0 mhz 1.8432 4.95 4.95 2.0 3.95 3.95 2.097152

2.03/132	3.33	
2.4576	3.95	
3.2768	3.95	
3.579535	3.95	
4.0	3.95	
5.0	3.95	
5.0688	3.95	
5.185	3.95	
5.7143	3.95	
6.0	3.95	
6.144	3.95	
6.5536	3.95	
8.0	3.95	
10.0	3.95	
10.738635	3.95	
14.31818		
	3.95	
15.0	3.95	
16.0	3.95	
17.430	3.95	
18.0	3.95	
18.432	3.95	
20.0	3.95	
22.1184	3.95	
32.0	3.95	
Name and Address of the Owner, when the Owner, which t		

CRT	
CONTROL	LERS
6845	14.95
68B45	19.95
HD46505SP	15.95
6847	11.95
MC1372	6.95
68047	24.95
8275	29.95
7220	99.95
CRT5027	39.95
CRT5037	49.95
TMS9918A	39.95
DP8350	49.95

KEYBOARD			
CHIP	S		
AY5-2376	11.95		
AY5-3600	11.95		

8000		
8035	5.95	
8039	6.95	
INS-8060	17.95	
INS-8073	24.95	
8080	3.95	
8085	5.95	
8085A-2	11.95	
8086	29.95	
8087	CALL	
8088	39.95	
8089	89.95	
8155	6.95	
8155-2	7.95	
8156	6.95	
8185	29.95	
8185-2	39.95	
8741	39.95	

8748 8755

8200		
8202	24.95	
8203	39.95	
8205	3.50	
8212	1.80	
8214	3.85	
8216	1.75	
8224	2.25	
8226	1.80	
8228	3.49	
8231	call	
8237	19.95	
8237-5	21.95	
8238	4.49	
8243	4.45	
8250	10.95	
8251	4.49	
8253 8253-5	6.95	
8253-5	7.95 4.49	
8255-5	5.25	
8257	7.95	
8257-5	8.95	
8259	6.90	
8259-5	7.50	
8271	39.95	
8272	39.95	
8275	29.95	
8279	8.95	
8279-5	10.00	
8282	6.50	
8283	6.50	
8284	5.50	
8286	6.50	
8287	6.50	
8288	25.00	
8289	49.95	

DIS	С
CONTRO	LLERS
1771	16.95
1791	24.95
1793	26.95
1795	49.95
1797	49.95
2791	54.95
2793	54.95
2795	59.95
2797	59.95
6843	34.95
8272	39.95
UPD765	39.95
1691	17.95
2143	18.95

CONNECTO	RS
RS232 MALE	2.50
<b>RS232 FEMALE</b>	3.25
RS232 HOOD	1.25
S-100 ST	3 95

	U	
	5.95	
	6.95	
60	17.95	
73	24.95	
	3.95	
	5.95	
2	11.95	
	29.95	
	CALL	
	39.95	
	89.95	
	6.95	
	7.95	
	1.33	

	7.95	950	6844	25.
	6.95	976	6845	14.
	29.95		6847	11.
	39.95		6850	3.
	39.95		6852	5.
	24.95		6860	9.
	24.95		6862	11.
			6875	6.
			6880	2.
8200			6883	22.
OLOU			68047	24.
	24.95	344	68488	19.
	39.95	2.5	6800 =	1MHZ
	3.50		68B00	10.
	1.80	130	68B02	22.
	3.85		68B09E	29.
	1.75		68B09	29.
	2.25		68B10	6.
	1.80		68B21	6.
	3.49		68B45	19.
	call		68B50	5.
	19.95		68B00 =	
	21.95		00800 -	ZIVITZ
	4 40	EF IN		

650	20
1 MI	
6502	4.95
6504	6.95
6505	8.95
6507	9.95
6520	4.35
6522	7.95
6532	9.95
6545	22.50
6551	11.85
2 MI	HZ
6502A	6.95
6522A	9.95
6532A	11.95
6545A	27.95
6551A	11.95
3 M	HZ
6502B	14.95

Section in	A COLOR
UART	S
AY3-1014	6.95
AY5-1013	3.95
AY3-1015	6.95
PT1472	9.95
TR1602	3.95
2350	9.95
2651	8.95
TMS6011	5.95
IM6402	7.95
IM6403	8.95
INS8250	10.95
GENERA	TORS
BIT-RA	TE
MC14411	11.95
BR1941	11.95
4702	12.95
COM5016	16.95
COM8116	10.95
MM5307	10.95
FUNCT	ON

3.95

1.49

MC4024

LM566 XR2206

8038

74LS15	.35	74LS221	.89
74LS20 74LS2:	.25	74LS240	.95
74LS22	.25	74LS241 74LS242	.99
74LS26	.29	74LS243	.99
74LS27	.29	74LS244	.99
74LS28	.35	74LS245	1.49
74LS30	.25	74LS247	.75
74LS32 74LS33	.29	74LS248 74LS249	.99
74LS37	.35	74LS251	.59
74LS38	.35	74LS253	.59
74LS40	.25	74LS257	.59
74LS42 74LS47	.49	74LS258	.59
74LS47 74LS48	.75 .75	74LS259 74LS260	2.75
74LS49	.75	74LS266	.59
74LS51	.25	74LS273	1.49
74LS54	.29	74LS275	3.35
74LS55	.29	74LS279	.49
74LS63 74LS73	1.25	74LS280	1.98
74LS73	.39	74LS283 74LS290	.69
74LS75	.39	74LS290	.89
74LS76	.39	74LS295	.99
74LS78	.49	74LS298	.89
74LS83	.60	74LS299	1.75
74LS85 74LS86	.69	74LS323	3.50
74LS90	.39	74LS324 74LS352	1.75
74LS91	.89	74LS352	1.29
74LS92	.55	74LS363	1.35
74LS93	.55	74LS364	1.95
74LS95	.75	74LS365	.49
74LS96 74LS107	.89	74LS366	.49
74LS107	.39	74LS367 74LS368	.45
74LS112	.39	74LS373	.99
74LS113	.39	74LS374	.99
74LS114	.39	74LS377	1.39
74LS122	.45	74LS378	1.18
74LS123 74LS124	.79 2.90	74LS379 74LS385	1.35
74LS125	.49	74LS385	1.90
74LS126	.49	74LS390	.45 1.19
74LS132	.59	74LS393	1.19
74LS133	.59	74LS395	1.19
74LS136 74LS137	.39	74LS399	1.49
74LS137	.99 .55	74LS424 74LS447	2.95
74LS139	.55	74LS490	1.95
74LS145	1.20	74LS624	3.99
74LS147	2.49	74LS640	2.20
74LS148 74LS151	1.35	74LS645	2.20
74LS153	.55 .55	74LS668 74LS669	1.69
74LS154	1.90	74LS670	1.49
74LS155	.69	74LS674	9.65
74LS156	.69	74LS682	3.20
74LS157	.65	74LS683	3.20
74LS158 74LS160	.59	74LS684	3.20
74LS161	.65	74LS685 74LS688	3.20
74LS162	.69	74LS689	3.20
74LS163	.65	74LS783	24.95
74LS164	.69	81LS95	1.49
74LS165 74LS166	.95 1.95	81LS96	1.49
74LS168	1.75	81LS97 81LS98	1.49
74LS169.	1.75	25LS2521	1.49
74LS170	1.49	25LS2569	4.25
	and the later	WELL STREET, STREET	THE PARTY

**74LS00** 

.25

.25

.24

.28

.29

.35

.45 .59

.35

74LS173 74LS174

74LS175 74LS181

74LS189 74LS190

74LS191

74LS192 74LS193

74LS194 74LS195

74LS196 74LS197

741 5221

.55

2.15

8.95

.89 .79 .79 .69 .69 .79

.89



## **DR Microdevices**

1224 S. Bascom Ave. • San Jose, CA 95128 (408) 995-5430 • Telex 171-110

6 1983 JDR MICRODEVICES, INC.

#### **VISIT OUR RETAIL STORE**

HOURS: M-W-F, 9-5 T-Th., 9-9 Sat. 11-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING TEARS USE FOUR CUSTOMER NUMBER WHEN ORDERING TERMS: For shipping include \$2 for UPS Ground or \$3 for UPS Blue Label Air. Items over 5 pounds require additional shipping charges. Foreign orders, include sufficient amount for shipping. There is a \$10 minimum order. Bay Area and Los Angeles Counties add 6½% Sales Tax. Other California residents add 6½ Sales Tax. We reserve the right to substitute manufacturer. Not responsible for typographical errors. Prices are subject to change without notice. We will match or beat any competitor's price provided it is not below our cost.

## 2114 450 NS 8/\$995

## 2114 250 NS 8/\$1095

7400	LINEAR	RCA	CMOS
7400 1.9 74132 .45 7401 1.9 74136 .50 7402 1.9 74141 .65 7403 1.9 74142 2.95 7404 1.9 74143 2.95 7405 .25 74145 .60 7406 .29 74147 1.75 7407 .29 74148 1.20 7408 .24 74150 1.35 7409 1.9 74151 .55 7410 1.9 74152 .65 7411 .25 74153 .55 7412 .30 74154 1.25 7413 .35 74155 .75 7414 .49 74156 .65 7416 .25 74157 .55 7417 .25 74159 1.65 7420 1.9 74160 .85 7420 1.9 74160 .85 7421 .35 74161 .69 7422 .35 74162 .85 7423 .29 74163 .69 7425 .29 74164 .85 7426 .29 74165 .85 7427 .29 74166 1.00 7428 .45 74167 .95 7433 .45 74167 .95 7433 .45 74173 .75 7437 .29 74176 .89 7438 .29 74176 .89 7438 .29 74176 .89 7438 .29 74176 .89 7438 .29 74176 .89 7439 .29 74176 .89 7440 .19 74176 .89	LM301         .34         LM340 (see 7800)         LM566         1.49           LM301H         .79         LM348         .99         LM567         .89           LM308         .49         LM567         .89         LM567         .89           LM308         .69         LM350T         4.60         NE571         .295           LM309H         1.15         LM358         .69         NE592         2.75           LM309H         1.95         LM359         1.79         LM709         .59           LM309K         1.25         LM376         3.75         LM710         .75           LM311         .64         LM378         2.50         LM723         .49           LM311         .64         LM379         4.50         LM723H         .55           LM312H         1.75         LM309         .89         LM723         .49           LM317H         3.95         LM380N-8         1.10         LM723H         .55           LM317H         3.95         LM380N-8         1.10         LM741N-14         .35           LM317T         1.19         LM381         1.60         LM741N-14         .35           LM318H         1.5	LM1800 2.37 CA 3023 2.75 CA 3082 1.65 LM1812 8.25 CA 3039 1.29 CA 3083 1.55 LM1813 3.50 CA 3046 1.25 CA 3086 .80 LM1871 5.49 CA 3059 2.90 CA 3089 2.99 LM1872 5.49 CA 3060 2.90 CA 3096 3.49 LM1877 3.25 CA 3060 1.75 CA 3130 1.30 LM1889 1.95 CA 3080 1.10 CA 3140 1.15 LM1896 1.75 CA 3081 1.65 CA 3146 1.85 ULN2003 2.49 CA 3081 1.65 CA 3146 1.85 ULN207 2.05 LM2900 8.5 TL496 1.65 75450 5.99 LM2901 1.00 TL494 4.20 75365 1.95 LM2901 1.95 TL496 1.65 75452 3.99 LM3901 3.95 T5107 1.49 75452 3.99 LM3911 2.25 75107 1.95 75453 3.91 LM3914 3.95 75150 1.95 75454 3.91 LM3915 3.95 75150 1.95 75454 3.91 LM3916 3.95 75150 1.95 75454 3.91 LM3916 3.95 75154 1.95 75491 7.99 MC4024 4.50 75188 1.25 75492 7.99 MC4024 4.50 75188 1.25 75492 7.99 MC4024 4.50 75189 1.25 75493 8.99 MC4024 4.50 75494 8.99 MC4024 4.50 75494 8.9  BIFET  LM4500 3.25 TL071 7.9 TL084 2.19 LM313080 1.29 TL074 2.19 LF335 1.00 LM13080 1.29 TL074 2.19 LF355 1.10 LM13700 1.49 TL081 7.9 LF355 1.10 LM13700 1.49 TL082 1.19 LF355 1.10 LM31700 1.49 TL082 1.19 LF355 1.10 LM31700 1.49 TL082 1.19 LF355 1.10 LM31700 1.49 TL082 1.19 LF355 1.10 LF357 1.40	4000 29 4527 1.95 4001 25 4528 1.19 4002 25 4531 .95 4006 89 4532 1.95 4006 89 4532 1.95 4008 95 4539 1.95 4009 39 4541 2.64 4010 45 4543 1.19 4011 25 4553 5.79 4012 25 4555 .95 4013 38 4556 .95 4014 79 4581 1.95 4016 39 4584 75 4017 69 4585 75 4018 79 4702 12.95 4019 39 74C00 35 4020 79 74C08 35 4021 79 74C08 35 4022 79 74C08 35 4022 79 74C08 35 4022 79 74C08 35 4024 65 74C14 59 4025 29 74C20 35 4026 1.65 74C14 59 4027 45 74C32 39 4028 69 74C42 1.29 4029 79 74C48 1.99 4030 39 74C73 .65 4035 85 74C76 .80 4040 75 74C83 1.95
7444	74S158 .95 74S474 4.95 74S161 1.95 74S482 15.25 MAN 72 74S162 1.95 74S570 2.95 74S571 2.95 FND-500 (503)	REGULATORS  7805T .75 7908T .85 7808T .75 7908T .85 7812T .75 7912T .85 7812T .75 7912T .85 7812T .75 7912T .85 7824T .75 7924T .85 7824T .75 7924T .85 7824T .39 7905K 1.49 7815K 1.39 7912K 1.49 7815K 1.39 7915K 1.49 7815K 1.39 7912K 1.49 7824K 1.39 79105 .79 7824K 1.39 79105 .79 7824	4042
CLOCK CIRCUITS MM5314 4.95 MM5369 3.95 MM5375 4.95 ICL71 MM58167 8.95 MM58174 11.95 MSM5832 6.95	9.95 9.95 9334 2.50 EXAR 2006 9368 3.95 9401 9.95 9801 7.75 9802 1.50 96S02 1.95 96S02 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	DATA ACQUISITION  ADC0800 15.55 DAC0808 2.95  ADC0804 3.49 DAC1020 8.25  ADC0804 4.49 DAC1022 5.95  ADC0817 9.95 MC1408L6 1.95  DAC0800 4.95 MC1408L8 2.95	SOUND CHIPS 76477 3.95 76489 8.95 AY3-8910 12.95 AY3-8912 12.95 MC3340 1.49

ORDER TOLL FREE
ALL MERCHANDISE
100% GUARANTEED

800-538-5000


000 800-662-6279 (CALIFORNIA RESIDENTS)
CALL US FOR VOLUME QUOTES





a 1983 JDR MICRODEVICES, INC.

## DIGI-KEY 800-346-5144

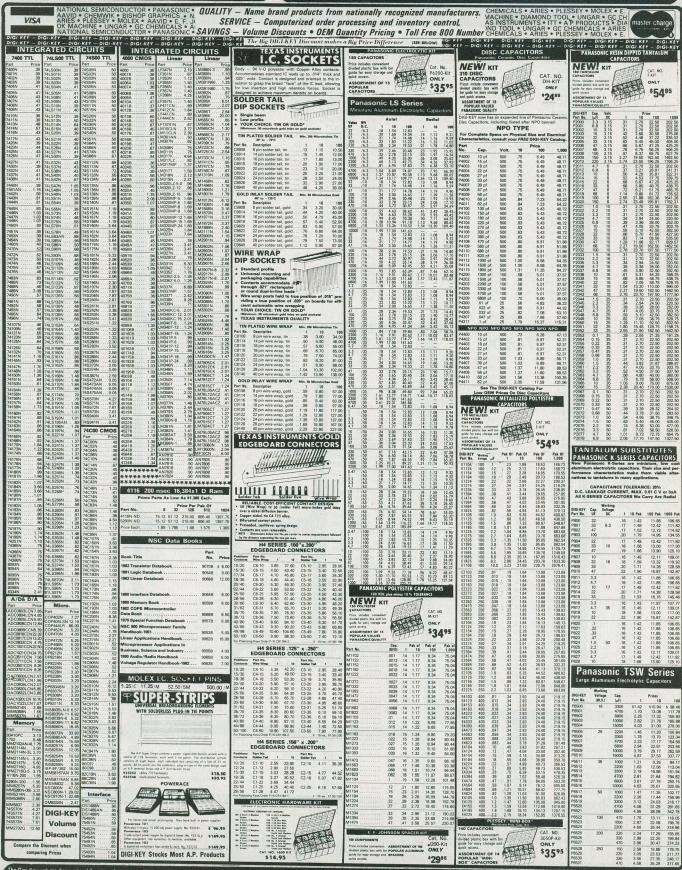

The Uig-Key volume discount and Service charges are simple to apply. Most items sold by Digi-Key may be combined for a volume discount. Items that are not discountable are identified by the suffix. Not following the part number. After writing your order, total all of the discountable items and emply the appropriate descount. To this substrate, and the non-discountable tems. Then add is the hobbilit charge. We pay all shipping and insurance to addresses in the U.S.A. Canada and Mexico when payment accompanies order.


WHIN OBSIRING BY PROME, CALLI: 1809.346-3144 (Min. Ak., Hi., call 218-388-1647) By mail sand your order to: DIGI-KEY, Highway 32 South, Thief River Falls, MN 55701

You may pay by check, maney order. Moster Charge. VISA or C.O.D. DIGI-KEY GUARANTEE: Any ports or products purchosed from Digi-Key that prove to be defective will be

SERVICE \$ 0.00-\$ 9.99 \$ 10.00-\$25.00 \$ 25.00-\$49.99 CHARGES VOLUME DISCOUNT

Add \$2.00 \$ 0.00 \$ 99.99 NE
Add \$0.75 \$ 100.00 \$2249.99 Less 10'
Add \$0.50 \$ 220.00 \$499.99 Less 15'

## DIGI-KEY 800-346-5144

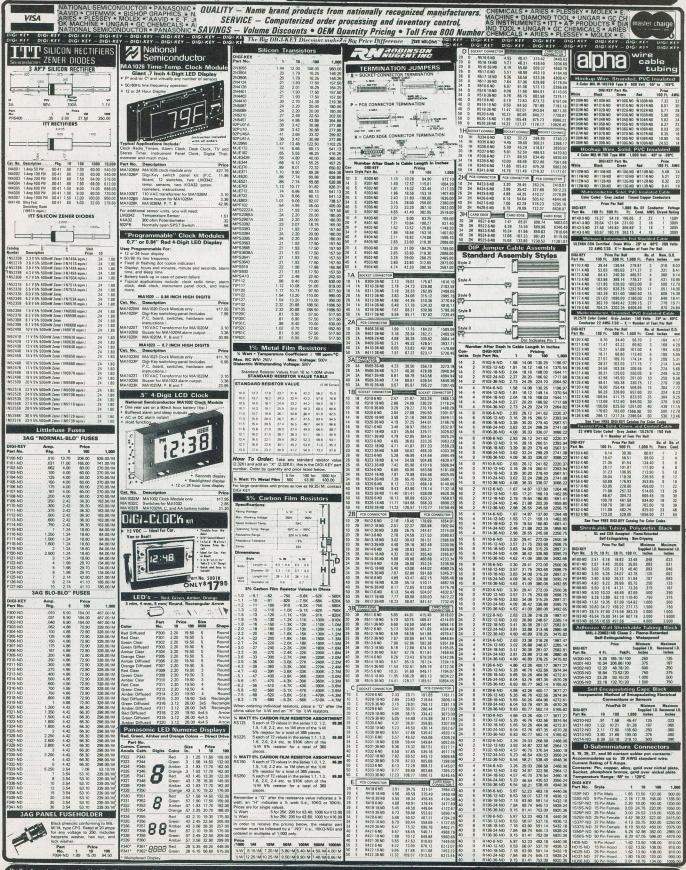

he Digit-key volume discount and handling thanges are simple to apply. Most items sold by Digit key may be combined for a volume discount. Items that are not discountable are identified by the individual property of the individual property of the individual property. After writing your order, total did if the discountable items and apply the appropriate discount. In this subtoal, add the non-discountable items. Then add in the individual individual individual property. Add \$2.00 \$ 0.00.5 9.99. Add \$2.00 \$2.00.5 9.99. Add \$2.00.

## **SUMMER PROJECTS START WITH SHACK® PARTS**

No Minimum Order! No Mail-Order Delays! See Before You Buy!

#### Ceramic TV-Sound Filters



#### NEW!

Low As 69¢

- Replace Costly Transformers
- · Pre-Tuned, No Tweaking Needed

SFE4.5MB. Perfect for video projects! Will also replace 4.5 MHz sound transformer in many solid-state circuits. 3 dB bandwidth: 105 kHz, typical.

CDA4.5MD3 Discriminator. Ceramic differential 

#### Sale! 10 × 10cm Solar Cell



Save \$5

Harness "Free" Power That's Available **Every Sunny Day!** 

Build a panel for charging batteries or powering projects. This quality cell, approximately 4" square, produces 0.42 VDC at 2 amps in full sun. Wire several in series for more voltage. Sale 12.95

#### **Deluxe LCD Autoranging**

Multimeter



**NEW** LOW PRICE!

Was \$89.95 in 1983 Catalog

- Handy "Beep" Continuity Checker
- Ready-to-Use, With Leads & Manual

The DVM that thinks! You choose the function, it selects range automatically-even if test leads are reversed. Selectable continuity and range-change "beep" indicator Makes highly accurate low-resistance measurements. Low-battery and overrange indicators. Measures up 1000 volts DC, 500 volts AC, 200 milliamps (AC and DC), 2 megs resistance. Accuracy: ±1 digit. 63/s × 31/2 × 13/s". With spare fuse, test leads and manual. Requires two "AA" batteries.

#### **Over-Voltage Sensor IC**

#### **NEW!** 159

**Protects Sensitive Electronic Circuits** 



MC3423. Monitors the supply rail and triggers an external LED or a crowbar SCR in the event of line transients or loss of regulation. Operates with supply voltages from 4.5 to 50 volts DC 276-1717


### Super Timer IC



16-Pin DIP With Data

μA2240 Programmable Timer Counter. Provides very accurate timing from microseconds to days. Consists of a time-base oscillator, an eightbit counter, a control flip-flop and a voltage regulator. Frequency of the time base is set by external resistor and capacitor and can be synchronized or modulated. A time-base output may be used to monitor frequency or provide pulse to other cir-cuitry. The eight outputs are TTL, DTL and CMOS compatible. 5 to 15VDC operation, single supply. 16-pin DIP with specs and data.

#### Rectangular LED



Orange, high brightness type. Can be stacked vertically or horizontally. 276-074 ...... Sale, 2/59¢



#### **Double Closed** Circuit Jack 159 3-Conductor Type

For 1/4" phone plug. Can be wired to disconnect speakers automatically when stereo headphones

are plugged in. 274-1240



#### Micro 5VDC Relay

Shown actual size—ideal for crowded boards. SPDT contacts: 1A at 125VAC. 55-ohm coil.

#### Tone-Dialing Encoder



tion marks. 270-201

#### **Tantalum Capacitors**



Low As 49¢ Each

- 20% Tolerance
- 16 WVDC Minimum
- Large Capacity in A Very Compact Size

μF	Cat. No.	Each
0.1	272-1432	.49
0.47	272-1433	.49
1.0	272-1434	.49
2.2	272-1435	.59
10	272-1436	.69
22	272-1437	.79



399 Dependability At a Bargain Price!

TCM5089. Accurate, stable dual tone output—meets industry stan-dards without adjustment. Just add keyboard (a pushbutton switch matrix will do), resistor, colorburst crystal (#272-1310) and power source to operate. Electronic input, too—usable in an auto-dial modem. Powered from phone line or 9VDC. 276-1301

#### **SPST Toggle Switch** With LED Indicator



NEW LOW PRICE!

Was \$2.99 in


1983 Catalog

Rated 5 amps, 12VDC only.  $3/4 \times 3/4 \times 1/2$ ". 7/16" mounting hole. 275-680 2.59

NEW 199 LOW PRICE!

Was \$2.49 in 1983 Catalog

#### Manufacturer's Prime **Microwave Devices**



A MRF-901. Low-noise NPN transistor for use up to 2 Gigahertz. 300 mW maximum dissipation. 276-2044

H-P 5082-2835. Low-noise Schottky barrier diodes. Ideal for UHF and microwave mixers. 1 pF maximum capacitance

276-1124 Pkg. of 2/1.99

#### **DC Motor** Bargain



For models, robots, etc. Long-life bearings. 1.5 to 6VDC. 273-222 . . 4/99¢

#### Micronta® Precision **DC Panel Meters**

NEW LOW PRICES!

795

Fach Were \$8.95 in 1983 Catalog



 Jeweled D'Arsonval Movements Accuracy ±5%, Full Scale

Know "what's going on" in critical DC circuits. All are  $2^3/4 \times 2^1/4 \times 1^1/4$ " and require a 17/8" round mounting hole. 0 to 50 Microamps. 270-1751 0 to 1 Milliamp. 270-1752 0 to 15 Volts. 270-1754

#### **Layout Template**

**Half** 149 Price Reg. 2.99



Durable, transparent stencil with 53 Really hanuy. useful shapes. Re 41/2×6×1/40". 276-181

Transformer, **6VAC** Save \$1



Primary: 120VAC. Secondary 6.3VAC at 450 mA maximum. 17/16 × 23/8 × 11/2". Cut 33%. **273-1364** . . . . . . . . Sale 1.99

A DIVISION OF TANDY CORPORATION

**OVER 8700 LOCATIONS WORLDWIDE** 

## Computers & Electronics Marketplace

#### FOR SALE

GOVERNMENT and industrial surplus receivers, transmitters, snooperscopes, electronic parts, Picture Catalog 25 cents. Meshna, Nahant, Mass. 01908.

ELECTRONIC PARTS, semiconductors, kits. FREE FLYER. Large catalog \$1.00 deposit. BIGELOW ELECTRONICS, Bluffton, Ohio 45817.

BUILD AND SAVE. TV EARTH STATION. DETECTIVE ELECTRONICS. Video Recorders, Color Cameras, advanced Telephone Projects. BROADCAST Electronics. 50 page color catalog of unusual electronic projects AIR MAILED \$3.00; with 3 hour audio cassette dramatization of our catalog \$5.00. Don Britton Enterprises, PO Drawer G, Waikiki, Hawaii 96815.

RECONDITIONED TEST EQUIPMENT \$1.00 for catalog. WALTER'S TEST EQUIPMENT, 2697 Nickel, San Pablo, CA 94806. (415) 724-0587.

ELECTRONIC PARTS. Stamp for flyer, \$1.00 deposit for catalog. DAYTAPRO ELECTRONICS, 3029 N. Wilshire, Arlington Hts., IL 60004.

ELECTRONIC CATALOG. Over 4,500 items. Parts, & components. Everything needed by the hobbyist or technician. \$2.00 postage & handling (United States Only), refundable with first \$15.00 order. T & M Electronics, 472 East Main St., Patchogue, NY 11772. (516) 289-2520.

PRINTED CIRCUIT BOARDS, your artwork. Quick delivery. Reasonable. Atlas Circuits, Box 892, Lincolnton, NC 28092. (704) 735-3943.

SATELLITE TELEVISION...HOWARD/COLEMAN boards to build your own receiver. For more information write...ROBERT COLEMAN, Rt. 3, Box 58-APE, Travelers Rest, S.C. 29690.

SOUND SYNTHESIZER KITS—Surf \$19.95, Wind \$19.95, Wind Chimes \$24.95, Musical Accessories, many more. Catalog free. PAIA Electronics, Box J14359, Oklahoma City, OK 73114.



#### SATELLITE TV FANTASTIC 80 TV CHANNELS

New antenna construction plans plus big 8 × 11 book loaded with aiming info, kits, LNAs and receivers at wholesale prices. Far better than cable TV! Enjoy crystal clear reception. Send \$9.95 to-day. Add \$2.00 for 1st class (air mail) or call our 24 hr. COD order line (305)862-5068 Now.

Global TV Electronics, P.O. Box 219-E, Maitland, FL 32751

RF MODULATORS for SATELLITE TELEVISION, MICRO-COMPUTERS, CCTV. Also monitors, cameras, kits. FREE VIDEO CATALOG. Phone (402) 987-3771. Dealers Welcomed. ATV RESEARCH, 13-P Broadway, Dakota City, NE 68731.

CABLE TV CONVERTERS & EQUIPMENT. Plans and parts. Build or buy. For more information send \$2.00: C & D ELECTRONICS INC., P.O. Box 21, Jenison, MI 49428.

FREE FLYER! IC's, resistors, capacitors, jacks, etc., plus SSM music synthesizer/audio IC's, power amp modules, analog delay IC's, computer books, and more. Also plans for analog delay/chorus unit! PGS Electronics, Route 25, Box 304 Terre Haute, IN 47802.

#### SATELLITE TV

SYSTEMS • COMPONENTS • LNA's •
 ANTENNAS • RECEIVERS •
 WE CAN HELP YOU!

#### HIGH FRONTIER

2230 E. Indian School Rd., Phoenix, AZ 85016 (602) 954-6008

TELETYPE EQUIPMENT: Copy Military, Press, Weather, Amateur, Commercial Transmissions. Catalog \$1.00. WEATHER-MAP RECORDERS: Copy Satellite Photographs, National-Local Weather Maps. Learn How! \$1.00. Atlantic Sales, 3730 Nautilus Ave., Brooklyn, NY 11224. Phone: (212) 372-0349.

PRINTED CIRCUIT BOARDS. "QUICK PROTOTYPES", production, design, reflow solder. Send print or description for quote to: KIT CIRCUITS, Box 235, Clawson, MI 48017.

CABLE TV SECRETS, the informative publication the cable companies are trying to ban. HBO, Movie Channel, Showtime converters, etc. Send \$8.95 to: CABLE FACTS, Box 711-PE, Pataskala, Ohio 43062.



#### **REPAIR ATARI GAMES AT HOME**

ONVILLE, INDIANA 47130

Complete repair course on 3 hour video tape (Beta or VHS) plus schematics and technical literature enables you to start earning money right away. All popular repair parts in stock for immediate shipment. \$1.00 for parts/price list and additional information refundable with order. Exclusive National Distributor.

ELECTRONICS WAREHOUSE CORP.

ELECTRONICS WAREHOUSE CORP. 1910 Coney Island Avenue Dept. CE-7 Brooklyn, N.Y. 11230 (212) 375-2700

FREE FLYER 99 cent kits. Parts. Bargains Galore! ALLKIT, 434 West 4th St., West Islip, New York 11795.

RESISTORS, ¼W½W5%C.F., 3¢ ea., 1% Metalfilms. NO MINIMUMS. Quantity Discounts. Write: JR INDUSTRIES, 5834-A Swancreek, Toledo, OH 43614.

IF YOU ARE READY TO BUY OR SELL GAMES OR SOFTWARE, YOU NEED...

COMPUTER SHOPPER

Over 100 pages each month. Deal with individuals nationwide. Low ad rate, only 12° a word. Subscription: \$10/year. MC & VISA. Money back guarantee. 407 S. Washington, P.O. Box F599, Titusville, Fl. 32780. (305) 269-3211.

#### CABLE TV

CONVERTERS & EQUIPMENT

We have the largest selection of JERROLD and OAK cable converters and equipment. Such as: Jerrold SB-3, Oak N12 and Jerrold 61 channel remote control converter with FULL features DRX3-DIC-105. Plus others.

#### CABLE TV KITS

Cable TV Kit (Jerrold gated pulse) 39.95.

We also have a large selection of cable TV and kits including all parts, silk screen, PC board and complete instructions.

Send for informative catalogue \$2.00

J & W ELECTRONICS, INC. P.O. BOX 61-K

CUMBERLAND, RI. 02864

BIG SAVINGS ON CONY TRANSMITTERS—Up to 30% OFF! Send two stamps for catalog. S.E. Corp., Box 1132-PC, Yorba Linda, CA 92686.

HI-FI SPEAKER KITS and raw drivers from the world's finest manufacturers. For beginners and audiophiles. Free information. A&S SPEAKERS, Box 7462C, Denver, CO 80207, (303) 399-8609.

SATELLITE TV RECEIVER BREAKTHROUGH! Build your own commercial quality receiver now! Instruction manuals, schematics, circuit boards! Send stamped envelope: XANDI, Box 25647, Dept 22N, Tempe, AZ 85282.

PCB 15¢ sq-in. FREE DRILLING. Quantity Discounts. International Enterprise, 6452 Hazel Circle, Simi-Valley, CA 93063.

WHOLESALE: MATV/CATV/VCR equipment, Antennas, Audio, Cables, Adapters, Original and Replacement Cartridges, Styli, Telephone Accessories, Radios, Cassette Recorders, Speakers, etc. Send letterhead for catalog, 212-897-0509, D&WP, 66-19 Booth, Rego Park, NY 11374.

FREE CATALOG. Large selection of electronic kits and parts. Chaney Electronics, Box 27038, Denver, Colorado 80227. (303) 781-5750.



SATELLITE ANTENNAS, Build wood or metal from \$60, send \$2, Prototype Engineers, Box 1812, Deming, NM 88030.

ELECTRONIC KITS—Low cost Power Supplies, Amplifiers, Alarm Systems, etc. Catalog \$0.25. CBBI, Box 222, North Granby, CT 06060.

SUCKING SOLDER MADE EASY. Finally, one-handed desoldering with your gun. Superb results with surplus vacuum pump. Tip assembly \$14 postpaid. Complete instructions, free brochure. Gerkman Engineering, Box 28251, Detroit, MI 48228.

SATELLITE TELEVISION: Receivers \$300, Dishes \$100., LNA's, Microwave equipment. Catalog \$5.00. Satellite Systems, Box 184, Milpitas, CA 95035.



SATELLITE RECEIVING SYSTEMS, COMMUNICATION AND ELECTRONIC SPECIALTIES computerized pushbutton TeLEPHONES from \$13.95. CORDLESS TELEPHONES 700' range from \$99.95, satellite tvro systems, choose from 12 different manufacturers, from \$1880.00, write: STAR SYSTEMS, P.O. Box 245, Ontonagon, MI 49953, (906) 884-4877.

POLICE CODE UNSCRAMBLERS; lets you hear the coded messages of Police, Fire and Medical channels; plus other scanner accessories; satisfaction guaranteed: DNE, Inc., Rt. 7, Box 257A, Hot Springs, AR 71901, 501-623-6027.

PRINTED CIRCUIT BOARDS and Electronic Components. Gemini Projects, P.O. Box 35251, Chicago, IL 60635

TELEPHONES and ACCESSORIES. FCC registered. Send \$2.00 for 72 page catalog (refundable). UNIQUE COM-MUNICATIONS, INC., P.O. Box 5234, Mansfield, OH 44901.

TINKERTRON: Write for summer 1983 Electronics Catalog. Includes Voltage and Current Variable Power supplies, Audio Amp Modules, Remote Wireless switches and Electronic Parts. LOWEST PRICES-SAVE UP TO 50% or MORE! Send 25% to: TinkerTron, Department C, P.O. Box 53128, Lubbock, Texas 79453.

ELECTRONICS BARGAIN CATALOG—Write: Opal East Co., Box 0-38, 323 Franklin Bldg. S., Suite 804, Chicago,

## Worlds Most Remarkable Radar Jammer!

Causes speed radar guns and devices to read out your choice of either a percentage of your true speed when in automatic mode (example: Your speed; 75 mph, auto mode set for 75%, speed displayed – 57 mph), or the speed that you diel in when in manual mode. Transmits only in the presence of speed radar, or by manual override. Operates on both X and K bands. WARNING: The device described in this literature is not legal for use against police radar, and is not FCC approved.

For complete literature and plan package, send \$19.95 to:

Philips Instrument Design Co. Inc.
9135 S.W. Nimbus, Building #11, Suite #114 C
Beaverton, Oregon 97005

CLOSEOUT SPECIALS—Detector Circuits (for counting, security systems, etc.) developed for fibreoptic sensing—7 channels, with 5 VDC Power supply, with A/D conversion. Schematic supplied, \$20.00. 3-Digit Decimal Counter PC Boards-with readout and reset button requires + 5VDC—7IC's. Schematic supplied, \$15.00. Transformers—Triad 12.6 CT Volts-50/60 Hz F44K-2 AMP-115v Primary-1 15/16 x 3 5/16 x 2, \$5.00. Potentiometers—VRN INT. -20K, Ten Turns, 3/4 W., \$.25. Rectifier Bridges-Motorola 312 case, 50 VRM, 45a, MDA 100, \$1.00. TTLs 74LS32N-Quad 2-input OR gate \$.35, 74LS123-Dual One Shot \$.90, 74LS90-Decade Counter \$.60. OP Amps-LM324 Quad \$1.05. LED's-FLV 100 \$.10. Metal Oxide Varistors-MOV 150v-V150 LA 10A \$.75. MINIMUM ORDER \$10.00. Mass. residents add 5% sales tax. Certified check, M.O.—Freight prepaid. C.O.D.'s-Freight postpaid. PROGRAMS & ANALYSIS INC., Dept JPC, 21 Ray Avenue, Burlington, MA 01803, (617) 272-7723, Ext. 198.

#### COMPUTER EQUIPMENT/PARTS

SAVE 90% Build Your own Minicomputer. Free Details. Digatek, 2723 West Butler Dr., Suite 20C, Phoenix, AZ 85021.

APPLE SERIAL CARD. Communicate with MODEM or terminal. Switch selectable serial printer protocol, \$46.95/kit \$61.95/assm. Comprehensive manual, DB-25 connector, 6 month warranty. CHECK or C.O.D. B&D ELECTRONICS, Box 3651, Lawrence, KS 66044.

WANT A PLEASANT SURPRISE? Call or write for quotes: Atari, Commodore, Timex, T.I., Corona (IBM work-alike), Amdek, Anadex, Apple & IBM accessories, Hayes, More, GET SURPRISED! HARDWARE SOFTWARE ANYWARE CO., 10 Coles Street, Brooklyn, NY 11231, (212) 596-3592.

WIN RADIO SHACKS new TRS-80 Model 4 computer, 64 K, 2 disks, RS 232 Interface \$10.00 entry: SASE. (250 ENTRIES OR ALL RETURNED). H. Whitten, ECO/Teque Plaza, Suite 7A, Box 1151, Sonora, CA 95370.

TIMEX/SINCLAIR/VIC20: Software/schematic packages. RAM, I/O, key board beep, RS232, Monitor modification, Data sheet, maintenance aid for Timex/Sinclair \$5.95. Add \$2.00 for ham package. RAM, Port Breadboard, MX80 Interface, program listings for VIC20 \$3.95. Free product sheet. Santa Fe, 2335 S. Commerce Rd., Walled Lake, MI 48088.

BEST OFFER—Basic four group CPU48K Model 4212 with 1-20666 1-12588 screens 2-4226 discs one 4231 Printer. Call 305-592-9572.

HARD DISK DRIVE LIQUIDATION. Major OEM is liquidating inventory of unused Shugart 8" SA1002 5.33 megabyte hard disk drives, \$380 each. Western Digital's controller, \$350. Call: LIQUIDATORS, 803-877-9828, or send check/money order to: 105 S. Main St., Greer, SC 29651.

SALES PERSON/DEALERS WANTED for imported computer equipment/parts. Free details. WORLD ENTER-PRISES, 3227-D Riverview Place, Columbus, OH 43202.

VIC-20 WAVY-ELIMINATOR! Simply plug-In. Clean, stable computer display. \$19.00. Kouh, Box 31, Gaithersburg, MD 20877.

DIGITIZER/GRAPHICS TABLET, 16"x20". For VIC20/64, Atari and all computers accepting Atari paddles, \$44.95. Persimmon Peripherals, Route 2, Box 2306A-CE, Clayton, GA 30525.

APPLE BUILDERS—Send stamp for our flyer of Apple parts. IC sets, ROM sets, component packages, Shugart—Apple modification kits, Apple 9-track tape drives etc. Electrovalue, P.O. Box 376-P, Morris Plains, NJ 07950.

SC-01A SPEECH SYNTHESIZER CHIPS. 64 phonemes. Easily interfaced to VIC-20, Atari, IBM, etc. \$27.00 plus \$2.00 shipping, prepaid. Alien Group, 27 W. 23rd Street, New York, NY 10010.

#### **COMPUTER SOFTWARE**

VIC-20 USERS GROUP, receive newsletter, programs, discounts and more. Send SASE for information. P.O. Box 459, Dept 7, Ladson, South Carolina 29456.

APPLE, TRS-80. Stock market software. Free information. Stock Market Computers, 235 Mesa Avenue, Newbury Park, CA 91320, (213) 884-6900.

TIMEX-SINCLAIR USERS: Join the group of newsletter subscribers who receive free programs every month! Software discounts, Free program, issue and catalog. Z-WEST, Box 2411, Vista, CA 92083.

TI-99/4A MOON TRIP animated graphic program on cassette. Guide module through astroid belt. Then land on moon. Speech synthesizer and joyst capability. \$12.00 postpaid. JAG Software, P.O. Box 2225, Dept 1CE, Ocean, New Jersey 07712.

DISCOUNT SOFTWARE—Available for Apple, TRS-80, IBM/PC and TI 99/4 personal computers. Professional applications for the doctor, dentist, attorney, school administrator, teacher, contractor and general office personnel. Catalog \$1.00. Write for MONTHLY SPECIAL OFFERS! Creative Discount Software, 256 S. Robertson Blvd., Suite 2156, Beverly Hills, CA 90211.

COMPUTER PAPER—SAVE\$\$\$; Lowest single carton prices: Free samples. Bob's Charts, 405 East Third, Long Beach, CA 90802.

ATARI, APPLE, IBM-PC: Extensive line educational, entertainment, business. FREE BRO-CHURE. New Dimension Software, 39010 Baroque, Mt. Clemens, Michigan 48044.

TI-99/4A PROGRAMMERS: Affordable Software! Catalog, only \$1. PROGRAMS SOFTWARE, 1435 Burnley Square North, Columbus, Ohio 43229.

QUALITY COMPUTER SOFTWARE, VIC-20, Commodore 64, Atari. Games, Home, Ham radio. Large list, SASE. Amateur Accessories, Harvest Court, Flemington, New Jersey 08822. (201) 782-1551.

FREE money saving bulletin on popular brand name programs and books for your small computer. Superior, Dept CE, 8030 Westchester Road, Westchester, OH 45069.

FREE Timex/VIC-20/TI99-4A programs! SASEs/catalogs. Low prices! EZRAEZRA, Box 5222-C, San Diego, California 92105.

FREE VIC-20 Software-Hardware catalog. Lighthouse Sales, Dept. A, P.O. Box 68, Trenton, MI 48183.

BUSINESS GRAPHS. ZX81/TS1000 16K software cassette \$14.95. Spharler Software, Nine Springbrook Circle, Sacramento, California 95831.

TI-99/4A OWNERS. Send for free list of new and exciting, low cost software. D.E., Box 124, Hicksville, NY 11801.

DISCOUNT SOFTWARE & books! Business & professional applications. Free catalog. PBSoftware, Box 366, Dayton, OH 45401.

STOCK MARKET Investment Software, Detect cycles, generate BUY/SELL decisions. For details contact: S.M DECISIONS, Box 362, Dublin, PA 18917.

EPROM (2716) burner for VIC-20 or Commodore 64. Includes software on tape. \$135.00 for assembled and tested or ask for free info. JAT Electronics, Box 1222, Riverside, CA 92502.

EXCHANGE TI-99/4A cassette programs you've created with others. Also, 8-10 GREAT cassette programs only \$5. "THE EXCHANGE", CE-3, P.O. Box 46, Sterling, Virginia 22170.

VIC(5K)/BSR-X10 INTERFACE. Complete software (tape) and hardware plans, \$10.95. Simple to build—only two chips. SemiSoftware, 105 Whittier Place, Port Jefferson, NY 11777.

VIC-20 USERS GROUP, Programs, discounts, reviews, SASE, National VIC-20 Program Exchange, 102 Hickory Court, Portland, Indiana 47371.

COLOR COMPUTER FACSIMILE—All rates screen and printer. Gore Software, 2023 Castleridge, San Antonio, Texas 78227.

PAYOFF CHARGE ACCOUNTS, credit cards, save money. 16K TS1000 cassette program, \$12.95. JGS, 2 E. Oak Ave., Moorestown, NJ 08057.

SINCLAIR—Discount programs \$2.00. Send SASE for free listings. LDS Software, Box 999, College Station, TX 77841.

TI-99/4A CASSETTE GAMES. \$5.00 each, any two \$7.95, 75¢ p&h. Moon Landing, Submarine Hunt, Hangman, Mastmind, List, Cassette Software, 4129 Abercorn Road, Knoxville, TN 37921.

ZX81 GAMES, Bankman, Moon Landing \$8.95 each. Price list \$1.00 refundable. Box 1180, Reserve, LA 70084.

A/D CONVERTER BOARD FOR APPLE. 8 bit, 8 channels. Send \$27 for kit, \$10 for software (DVM, oscilloscope, stripchart recorder), SASE for info. Inquire for Timex, Commodore boards. HUANG & BERRY, 25 W. Wheelock St., Hanover, NH 03755.

#### **COMPUTER PUBLICATIONS**

FREE Catalog of special function IC's and quality components. Goldsmith Scientific, Box 318M, Commack, New York 11725.

TRANSIENT ANALYSIS and NETWORK THEOREMS, two new texts by Dr. Harry E. Stockman. Request Flyer. Sercolab, Box 78B, Arlington, MAy02174.

SOFTWARE AUTHORS: Join the National Association of Freelance Programmers (NAFLP) and receive NAFLP's monthly SOFTWARE MARKET LETTER. Learn how and where to sell your software and get programming contracts. For info, write: NAFLP, Box 813CE, Vienna, VA 22180: 703-938-9191.

#### **COMPUTER HARDWARE**

CHADWELL'S MONTHLY SPECIAL—ZX81 16K Expansion cartridge, \$40.95US + \$2.50p.h., VIC20 16K Expansion cartridge, \$69.96US + \$2.50p.h., VIC20 32K Expansion cartridge, \$99.95US + \$3.50p.h., VIC20 16K expansion cartridge, \$99.95US + \$3.50p.h., VIC20 16K expansion cartridge, \$74.95US + \$2.50p.h., ZX81 High Resolution Graphics Expansion cartridge \$89.95US + \$3.50 p.h. Send \$1.00 for catalogue: CHADWELL'S SOFTWARE, #230, 4144A-97 Street, Edmonton, Alberta, Canada 76E 5Y6. US orders welcome.

#### AMATEUR RADIO

RADIO AMATEUR CALLBOOKS: 1983 Directories of Radio Amateurs around the world. U.S. Callbook \$23.00; Foreign Callbook \$22.00, shipping included. See your Dealer or write for FREE catalog. RADIO AMATEUR CALLBOOK, Dept CE, 925 Sherwood Dr., Lake Bluff, IL 60044

VIDEOSCAN 1000 Slow Scan TV — HIGH RESOLUTION (amateur, phone line, monitoring, teleconferencing). CODE\*STAR — DECODE Morse, RTTY, ASCII. LARGE LEDs or connect computer/printer. MORSE-A-KEYER — CW Keyboard. TRI-VOLTAGE POWER SUPPLY. Kits/Assembled. FREE brochures. MICROCRAFT CORPORATION, Box 513-PE, Thiensville, WI 53092. (414) 241-6144.

#### TIMEX/SINCLAIR

FREE SOFTWARE/HARDWARE CATALOG for your TS/ZX-81 16K: New programs. JPR SOFTWARE, Box 4155, Winter Park, FL 32793.

KROPK, STAR SEARCH, NOAH'S ARK, finest programs available. Machine Language action, graphics. SASE Brown Cottage, 5486 Bright Hawk, Columbia, MD 21045.

"MUST-HAVE"! Utility SOFTWARE. Cassettes-relocatable machine language. SASE for information. SIRIUS WARE, 6 Turning Mill Rd., Lexington, MA 02173.

ANTI-SLIP COMPUTER CUSHION. Insures accurate, vibration free typing. \$4.95 complete. EDCOMPCO, 998 Farmington Ave., West Hartford, CT 06107.

TIMEX/SINCLAIR SOURCEBOOK. Catalog of Software, hardware and books available for T/S computers. Description, equipment required, price and ordering information provided for—600 PRODUCTS FROM 160 DIFFERENT SUPPLIERS—Free details. \$8.95 postpaid. NDC, Dept. C8, Box 280, Carrollton, Texas 75006.

TIMEX/SINCLAIR 1000/ZX81. HOW-TO Hardware upgrade book. Covering; Buffered expansion interface, Serial output, Std. printer interface and more. \$7.95. Inner Knowledge Computers & Peripherals, 5944 N.E. Sandy Blvd., Portland, Oregon 97213.

#### C.B. EQUIPMENT

IMPROVE CB PERFORMANCE! Modification hardware, books, plans, Catalog \$2. CBC INTERNATIONAL, Box 31500PE, Phoenix, AZ 85046.

#### **CABLE TV**

CHANNEL 3—60db notch filter. 63.5MHz. \$32. Crosley, Dept. 607, Box 840, Champlain, NY 12919.

#### **PLANS AND KITS**

ROBOTICS—BOOKS—build your own robot. Write now for FREE catalog! HD. Kohn/CE2, Box 16265, Alexandria, VA 22302

NEW! COLOR YOUR COMPUTER'S SCREEN! Videoflex Color Kit boosts fun and efficiency. Free details, Write Videoflex-3A, Box 149, Netcong, New Jersey 07857.

ALARM SYSTEM, battery powered. Professional features. Complete kit w/o chassis \$59.95. Free info. Silicon Machines Co., P.O. Box 1536, Wahiawa, HI 96786.

#### **MAILING LISTS**

COMPUTER SHOW ATTENDEES N.Y., N.J.: 15,000 NAMES. \$30/M. P/S labels. For info, (201) 297-2526.

#### **ALARMS**

BETTER EQUIPMENT, Longer Guarantee. You'll save! Catalog 50¢, refundable. AAS, 414A Lorna Square, B'ham, AL 35216.

BURGLAR ALARM BUYERS GUIDE—Educational manuals. Employment—business opportunities everywhere. Information \$2.00. Security Electronics International, P.O.B. 1456-QA, Grand Rapids, Michigan 49501.

#### HIGH FIDELITY

DIAMOND NEEDLES and STEREO CARTRIDGES at DISCOUNT PRICES for SHURE, PICKERING, STANTON, EMPIRE, GRADO, AUDIO TECHNICA, ORTOFON, ADC, SONUS, MICRO-ACOUSTICS and LAST. Send S.A.S.E. free catalog. LYLE CARTRIDGES. Dept. P., Box 69, Brooklyn, NY 11218. For fast COD service Toll Free 800-221-0906. N.Y. State (212) 871-3303. 9AM-8PM except Sunday.

#### **GOVERNMENT SURPLUS**

IS IT TRUE YOU CAN BUY JEEPS FOR \$44 THROUGH THE U.S. GOVERNMENT? Get the facts today! Call (312) 742-1142 Fyt 4649

#### TUBES

TUBES: "Oldies", Latest. Supplies, components, schematics. Catalog Free (stamp appreciated). Steinmetz, 7519-PE Maplewood, Hammond, Ind. 46324.

HUGE INVENTORY! Thousands of types. Wholesale prices. FREE CATALOG! ETCO Electronics, DEPT. 290, Plattsburgh, NY 12901.

#### **PERSONALS**

MAKE FRIENDS WORLDWIDE through international correspondence, illustrated brochure free. Hermes-Verlag, Box 110660/Z, D-1000 Berlin 11, W. Germany.

CORRESPONDENCE FOR FRIENDSHIP IN PHILIP-PINES, MALAYSIA. Free information. AAWS-(PE), Box 2777, Orcutt, California 93455-0777.

PENFRIENDS—ENGLAND—USA, through correspondence. Send age, interests. Free reply. Harmony, Box 89PE, Brooklyn, New York, 11235.

SCANDINAVIAN LADIES, sincere, seek correspondence for friendship. Details—Send stamp: Scannaclub, Box 4-(CE), Pittsford, NY 14534.

ORIENTAL SINGLES seeking cultural exchange, friendship, sharing, marriage. Write: CHERRY BLOSSOMS, Box 1021P, Honokaa, Hawaii 96727.

FREE: WORLD'S LARGEST PARTNER-PHOTO-CATA-LOG for friendship and marriage. Personalized introductions. INTERCONTACT, Box 12, Toronto, Canada M4A 2M8. U.S. Inquiries.

BEAUTIFUL PHILIPPINE LADIES. Seeking friendship, Romance, Marriage! Photos, Information Free! Transcor-B, Box 2321, Manila, Philippines 2801.

#### INSTRUCTION

LEARN WHILE ASLEEP! HYPNOTIZE! Astonishing details, strange catalog free! Autosuggestion, Box 24-ZD, Olympia, Washington 98507.

MEDICAL ELECTRONICS TECHNOLOGY, home study. Troubleshoot medical instruments. WTI, P.O. Box 3124. Fresno, CA 93650-3124.

UNIVERSITY DEGREES BY SPECIAL EVALUATION of existing credits and Job Experience. Fast, inexpensive. Call (614) 863-1791. Or write: EVALUATION, Box 13151-A8, Columbus, Ohio 43213.

REPAIR ELECTRONIC ORGANS—Revised home study course covers all current makes and models. Free book-let. Niles Bryant School, P.O. Box 20153, Sacramento, CA 95820.

F.C.C. COMMERCIAL RADIOTELEPHONE LI-CENSE. Home Study. Fast, Inexpensive! Free details. COMMAND, Box 26348-P, San Francisco 94126.

YOUR OWN RADIO STATION AM, FM, Cable, licensed, unlicensed, low cost transmitter! Free information. BROADCASTING, Box 130-A8, Paradise, CA 95969.

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D.s... Free revealing details. Counseling, Box 317-PE8, Tustin, California 92680.

#### **FOR INVENTORS**

PATENT AND DEVELOP your invention. FREE PATENT INFORMATION. Richard L. Miller, P.E., 3612-E, Woolworth Building, New York, NY 10007, (212) 267-5252.

INVENTIONS, IDEAS, NEW PRODUCTS WANTED! Industry presentation/national exposition. Call free 1-800-528-6050—Arizona, 1-800-352-0458. X831.

#### INVENTORS! IDEAS HAVE VALUE!

Ever think of an idea, forget it and see it later on the market? Many people don't forget, act quickly and are rewarded by American Industry. Write down your idea! We offer free disclosure registration and initial consultation regarding your idea's potential value. Call or write without delay for your free information package.

AMERICAN INVENTORS CORPORATION 82 Broad St., Dept. CE Westfield, MA 01086 (413) 737-5376

A fee Based Marketing Company Offices Coast to Coast

#### **BUSINESS OPPORTUNITIES**

FREE CATALOGS. Repair air conditioning, refrigeration. Tools, supplies, full instructions. Doolin, 2016 Canton, Dallas. Texas 75201.

MECHANICALLY INCLINED individuals desiring ownership of Small Electronics Manufacturing Business—without investment. Write: BUSINESSES, 92-K8 Brighton 11th, Brooklyn, New York 11235.

ERASE DEBTS with little-known law—create wealth!! Details FREE—Wealth Kit, No. EE8, Billings, NY 12510.

MAILORDER OPPORTUNITY! Start profitable home business without experience or capital. Information free. Mail Order Associates Inc., Dept 760, Montvale, NJ 07645.

ONE MAN CRT FACTORY. T.V.'s, Business machines, Monitors, Scopes, VDT's. \$3.00 rebuilding nets \$100-\$500 each tube. Higher profits overseas. New/used. FACTORY, 1909 Louise. Crystal Lake, IL 60014. (815) 459-0666.

MAKE MONEY SELLING ELECTRONICS. Wholesale dealer catalog \$5. (redeemable). ETCO, Dept. 532, Box 840, Champlain, N.Y. 12919.

BORROW \$300-\$30,000 INTEREST FREE! Keep indefinitely! Free Details. Write: American, 1601 Main, Plainfield, Indiana 46168.

I HAVE MADE A FORTUNE in Mail Order, selling information. Let me show you how. Write Kash CE701, Box 31051, Indianapolis, IN 46241.

BORROW \$30,000 without interest! All eligible. Repay anytime. Free details! Infohouse—508CE, 533 Sutter, San Francisco, CA 94102.

## LOCKSMITH



"Have seen other Locksmith courses but none compared to yours have a successful mobile service of my own. My earnings are good each month." Keith Hamill, Toronto You'll enjoy your work as a Locksmith because it is more fascinating than a hobby— and highly paid besides! You'll go on enjoying the fascinating work, year after year, in good times or bad because you'll be the man in demand in an evergrowing field offering big pay jobs, big profits as your own boss. What more could you ask!

Train at Home—Earn Extra \$\$\$\$\$ Right Away!

LOCKSMITHING INSTITLITE

Train at Home — Earn Extra \$\$\$\$ Right Away!

LOCKSMITHING INSTITUTE

Div. Technical Home Study Schools

Dept. 473-083 Little Falls, N. J. 07424

BUMPER STICKER PRINTING DEVICE. Cheap, Simple, Portable. Free details, Bumper, POB 22791 (PE), Tampa, FL 33622.

MAKING MONEY WITH PERSONAL COMPUTERS! 3 cassette package \$19.95, with book \$25.00. Computer Resources, 1659 Mills Street, Chula Vista, CA 92010.

LCD WATCH \$2.50, Penwatch \$3.60. Catalogue \$1.00. Reliant Engineering Company, P.O. Box 33610, Sheungwan, Hong Kong.

HOME BURGLAR ALARMS—Educate yourself. Sales—installations. Extra income source. Information \$2.00. Security Electronics International, P.O.B. 1456-BG, Grand Rapids, Michigan 49501.

PICTURE TUBE REBUILDING EQUIPMENT—new and used. ATOLL TELEVISION, 6425 Irving Park, Chicago, Illinois 60634, (312) 545-6667

#### **EMPLOYMENT OPPORTUNITIES**

ELECTRONICS/AVIONICS EMPLOYMENT OPPORTUN-ITIES. Report on jobs now open. Details FREE. Aviation Employment Information Service, Box 240E, Northport, New York 11768. JOBS OVERSEAS - Big money fast. \$20,000 to \$50,000 plus per year. Call 1-216-453-3000, ext. 4607.

GOVERNMENT JOBS—Thousands of vacancies must be filled immediately. \$17,634. to \$50,112. Call (716) 842-6000, Ext. 3904.

#### **BOOKS & MAGAZINES**

PUBLISHERS' OVERSTOCKS. BARGAIN BOOKS 2,000 titles, all subjects! Free catalog: Hamilton's, 98-85 Clapboard, Danbury, CT 06810.

DIRECTORY of Radio Collectors and Suppliers. 2000 listings. \$4. Free catalog. ARS Electronics, 3030 Pheasant Creek Drive, Northbrook, Illinois 60062.

#### RECORDS/TAPES

RECORDS—TAPES! Discounts to 73%. All labels; no purchase obligations; newsletter; discount dividend certificates. 100% guarantees. Free details. Discount Music Club, 650 Main St., PO Box 2000, Dept. 5-0883, New Rochelle, NY 10801.

TOTAL COMPUTER MUSIC—Most sophisticated ever. Classical, rock, oriental, funkola, space-age, etc. Half hour sampler cassette and catalog \$3. MACROFUSION®, 40879-F Highway 41, Oakhurst, CA 93644.

#### **REAL ESTATE**

NEW...FREE CATALOG! Top real estate values coast to coast! Please specify types, property and location desired. UNITED FARM AGENCY, 612-EP West 47th, Kansas City, MO 64112.

#### RUBBER STAMPS

RUBBER STAMPS, BUSINESS CARDS. Free catalog 1-800-851-4945, Jackson's, E-100, Brownsville Rd., Mt. Vernon, III. 62864.

#### RETAIL ROSTER

#### ALASKA

JUNEAU ELECTRONICS—1000 Harbor Way, 99801, (907) 586-2260. Apple, Osborne Hardware/Software/Peripherals. Full service and support.

#### CALIFORNIA

P.C. COMPUTERS, 10166 San Pablo Ave., El Cerrito, CA 94530. (415) 527-6044. Commodore Specialists! Epson Computers! Pied Piper! Call or write today. Excellent prices!

#### **MASSACHUSETTS**

SAUGUS—ROUTE 1. LAND OF ELECTRONICS. Walnut Place Shopping Center, (617) 581-3133. Apple, Altos—Hardware! Software/Peripherals. Service, Classes, Seminars.

#### **NEW HAMPSHIRE**

COMPUTER MART of NEW HAMPSHIRE, 170 Main Street, Nashua 03060. 603-883-2386. THE APPLE SPECIAL-ISTS. Full line Hardware/Software. Training/Service.

#### OHIO

COLUMBUS—HEATHKIT ELECTRONIC CENTER, 2500 Morse Rd., 43229. (614) 475-7200. Heath/Zenith Computers, Software, Peripherals, Robotics, Training.

#### PENNSYLVANIA

MARKETLINE SYSTEMS INC., 975 Jaymor, Southhampton 18966, 215-355-5400. Microcomputers, terminals, printers, supplies, monitors, modems, diskettes, etc.

#### WASHINGTON

TACOMA—COMPUTERS +, 2504 Jefferson Avenue 98402. (206) 272-2329. Atari/Commodore computers. Atari/Commodore/TRS-80 Training.

#### WISCONSIN

MILWAUKEE—HEATHKIT ELECTRONIC CENTER, 5215 W. Fond du Lac, 53216. (414) 873-8250. Heath/Zenith Computers, Software, peripherals, robotics.

### **Computer Mart**

RATE: Ads are 2" by 3". 1 insertion: \$625.00. 6 insertions: \$600.00 ea. 12 insertions, \$575.00 ea. Closing date: 1st of the 2nd mo. preceding cover date. Send order and remittance to Computer Mart, Computers & Electronics, 1 Park Ave., N.Y., N.Y. 10016. Direct inquiries to (212) 725-4216.

#### **TRS-80** DISCOUNT COMPUTERS



CALL US LAST for

the LOWEST price!

-825-4844

it will be worth the call!



CIRCLE NO. 91 ON FREE INFORMATION CARD

#### DISKETTES

51/4" Diskette 1D Single Side Double Density \$2990

51/4" Diskette 2D Double Side Double Density \$39\*0

Soft\* Box of 10 Soft\* Box of 10

\* Add \$1.75 for Plastic Library Case 8" and other brands also available.



COD ACCEPTED DEALER INQUIRIES INVITED



#### **CALL TOLL FREE** 800-848-1101

In N.Y.S. (716) 631-3925 BETSY BYTES Division BB International, Inc. .O. Box 564 Buffalo, N.Y. 14221

TERMS: Prepaid orders receive free shipping within continental U.S.A. Add 3% (\$2.00 minimum) shipping and handling charge on all COD and credit card orders. N.Y. res. add

CIRCLE NO. 94 ON FREE INFORMATION CARD

MODULES FOR:

#### TIMEX-Sinclair

64K MEMORY \$119.95 KIT \$129.95 W&T WHY PAY MORE?

MODEM \$119.95 KIT \$149.5 W&T (RS-232 Port & Software Included)

**RS-232 PRINTERINTERFACE** Only \$59.95 KIT \$69.5 W&T

CONTROL MODULE \$59.86 KIT

8 Relays, 8 Inputs, 8 LED's \$69.95 W&T

Expand your 16K to 32K with our M-16 \$59.95 KIT \$69.95 W&T

90-Day Warranty On All Modules. 10- Day Return Priviledge

**ORDER PHONE 803-532-5812** Add \$4.95 shipping & handling to all orders. CHECKS

BYTE-BACK CO. Rt. 3 Box 147 Brodie Rd. Leesville, S.C. 29070



THOUSANDS IN USE WITH PROVEN RELIABILITY ALL MODULES IN STOCK.

CIRCLE NO. 96 ON FREE INFORMATION CARD

#### Wasting Money! We Have the World's Most Cost Effective Development System.



Includes HexKit 1.0, a powerful 100% machine code editor / debugger utility program that makes coding for 8-bit Micros a snap.

Program from Commodore VIC-20 Keyboard into builtin 4K ROM emulator

Jumper to target ROM socket

 Test programs in circuit
 Built-in EPROM programmer and power supply Free Brochure

PROMQUEEN CARTRIDGE: \$199, U.S.; \$269, CAN.

Distributed in U.S. by Arbutus Total Soft, Inc., 4202 Meridian, Suite 214, Bellingham, WA 98226. Phone 800-426-1253, in Washington 206-733-0404 Distributed in Canada by IBC/DISTRIBUTION CANADA, 4047 Camphie St

48 days 4047 Cambie St. Vancouver, BC V5Z 2x9. Phone 604-879-7812 Visa/MC accepted

Promoueen 64 \$299. 8K board/w 1 Eprom \$29.95 16K board/w 1 Eprom \$39.95 C-64 board/w 1 Eprom \$39.95

CIRCLE NO. 92 ON FREE INFORMATION CARD

#### \$45000 WEEKLY

working one or two hours a day with your personal computer. **GUARANTEED. Simple** program process. No special skills or experience. details/application. **BOND INDUSTRIES** 

> 7115 Blanco Road Dept. 114-178 San Antonio, TX 78216

CIRCLE NO. 95 ON FREE INFORMATION CARD



CIRCLE NO. 97 ON FREE INFORMATION CARD

#### PROTECT YOUR COMPUTER FROM DESTRUCTIVE POWER LINE SURGES

**Surges**....momentary variations of thousands of volts strike *daily* on your home AC power line. Inchecked surges can disrupt normal computer operation and damage hardware. Now. CUTS Company offers surge protectors engineered specifically for personal computers.

- Both models protect *your* system from losing memory, misregistering programs, and blowing out components
- Both models contain a unique three-stage filter that clamps, limits, and dissipates incoming surges instantaneously for reliable and effective
- surge protection.
  Both models are compatible with all makes of computers and accessories

#### DON'T DELAY-PROTECT YOUR INVESTMENT NOW, ORDER TODAY:



SURGE-SOCK-IT Protected dual outlet that replaces any existing grounded outlet for permaner on-site protection. 125V, 15A

**SURGE BLOCK** (shown) Portable protected dual outlet that plugs into any 3 wire outlet. Includes neon light that monitors protector and ground path. 125V, 10A

\$29.95 ★12-Month Warranty on all Products★

PO. Box 691A SYOSSET, NY 11791



CIRCLE NO. 93 ON FREE INFORMATION CARD

#### TIMEX-SINCLAIR

MEMOCALC

MEMOTENT TS1000

MEMOCALC A POST OF THE PERSON OF THE PE

To Order: Send check, money order, or VISA/ MC number and exp. date plus \$2,00 shipping in the USA, MN res. add 6% sales tax. Write For Our Colorful New Catalog!

#### E. Arthur Brown Company Division Dept. TC-6 Alexandria, MN 56308 1702 Oak Knoll Drive Ph. 612/762-8847

## **UNIPROM**



THE VERSATILE EPROM HANDLER
Reads programs 2704, 2708, 2758, 2508, 2516, 2716 (1supply)
2532, 2732, INTEL'S 27324 and the 87554 (INTEL/NEC).
Reads/erases/programs Hitachi 48016 EEPROM'S
No personality modules required.
All signals are S-100 compatible (can adapt to mostother buses)
PORT manning occusies NO memory sages.

Port mapping occupies NO memory space.
Bus clock rates exceeding 6mhz.
All software is 8080/8085/Z80 compatible.
Software "user" friendly.
All software is fully CP/M & CDOS compatible.

Board (A&T) with extensive documentation . . \$199.00 Disk software (8" or NORTHSTAR 5.25") . . . . \$38.00 EPROM-based software with source listing ...

Featured in July, August '82 Microsystems GE CER -TEK

Doniphan (915) 581-6697 El Paso, TX 79932 ELECTRONICS MANUFACTURING SINCE 1975

CIRCLE NO. 98 ON FREE INFORMATION CARD





YES you can save up to 90% on a computer system for home or office.

68000 microsystem (8MHz) with 128KB & three RS-232C ports, \$252 00

8086 microcomputer with 128KB & three RS-232C ports, \$204.00

Z80A 4MHz micro with 64KB & two RS-232C ports, \$110.00

Floppy Interface as little as \$60.00

FREE BROCHURE TODAY

DIGATEK CORPORATION Suite 7 2723 West Butler Drive Phoenix, Az. 85021

**ROLL-YOUR-OWN TECHNOLOGY AND SAVE A BUNDLE** 

CIRCLE NO. 99 ON FREE INFORMATION CARD

#### IT'S HERE!! The keyboard you have been waiting for!

A LARGE 80 KEY TACTILE FEEL KEYBOARD (MEASURES 10" x 4") THAT PLUGS INTO THE SAME CONNECTORS AS EXISTING KEYBOARD ON YOUR ZX81 OR TIMEX SINCLAIR 1000. IT HAS ALL SILKSCREENED LEGENDS IN 3 COLORS ON THE BASE; MOLDED LEGENDS & GRAPHICS ON KEYTOPS; 8 AUTOMATIC SHIFT KEYS (NO SHIFTING REQUIRED) FOR EDIT, DELETE, SINGLE & DOUBLE QUOTES, COLON, SEMI-COLON, FUNCTION & STOP, 5" SPACE BAR; 2 SHIFT KEYS; NUMERIC KEY PAD.

#### **ONLY \$84.95**

MASS. RESIDENTS ADD 5% SALES TAX SHIPPING & HANDLING \$4.00/UNIT

DELIVERY 4 - 6 WEEKS, QUANTITY DISCOUNTS, WE WILL ACCEPT MC/VISA. PLEASE INCLUDE #'S, EXP. DATE AND SIGNATURE. FOR MORE INFORMATION SEND SASE. SEND INQUIRIES, CHECK OR MONEY ORDER TO: E-Z HE

SUITE 75 E, 711 SOUTHERN ARTERY QUINCY, MASSACHUSETTS 02169 (617) 773-1187

CIRCLE NO. 100 ON FREE INFORMATION CARD





GENESIS COMPUTER CORP

1444 Linden Street Bethiehem, PA 18018

CIRCLE NO. 103 ON FREE INFORMATION CARD

TIMEX-SINGLAIR 1983 Directory Where to find: Disk Drives, RAM Extensions, Printers, Modems, Keyboards, Game & Serious Software, Books, Periodicals, Programming Aids, and other Exciting Accessories!

Articles on: Special applications like Control Circuitry, Enhanced Graphics, Voice Generation, Music Synthesis, Video Inversion, Light Pens, Joysticks, etd. Complete Descriptions: We'll tell you what it is, what it does, how much it costs, and where to Jam-packed w/photographs: We knew you'd want to see what these products look like. So, we got pictures and put them in! Only \$5.95 ... Postpaid!
Sent First Class in the U.S.A.
To Order: Send check, money order, or VISA/MC number and expiration date. MN residents add 6% Dealer Inquiries Welcome. E. Arthur Brown Company 1702 Oak Knoll Drive Ph: 612/762-8847 Alexandria, MN 56308



- 12 Unbuffered TTL Digital I/O Lines8 Unbuffered Analog Inputs
- (O 5V.)

  8-Bit Analog To Digital Converter

  LED Status Indicators
- Clock/Calendar
- Buffered Digital Outputs
- (500 m.a.) TRIAC Outputs 400 V. 2 Amp Zero-Crossing Optically isolated (IOC 24-4 has 4 TRIAC Outputs, IOC 24-12 has 12 TRIAC Outputs)

  Regulated 5V. Power Source Using The Power Supply Of The
- Computer
- Programmable Peripheral Interface Sample Program Included

#### GCM Electronics, Inc.

P.O. Box 6152 Ft. Smith, AR 729O6 Phone: 501-646-2100

189.95 IOC 24-4 189.95 IOC 24-12 249.95 CABLE 12.95

Checks, VISA, MasterCard Sorry-no C.O.D.s

CIRCLE NO. 102 ON FREE INFORMATION CARD



GLOUCESTER COMPUTER 1 Blackburn Center, Gloucester, MA 01930 617-283-7719 CIRCLE NO. 104 ON FREE INFORMATION CARD

VIC VIC 20 \$219 \$100.00 \$397.00 VIC 64 DATASETTE \$69 VIC PRINTER \$380 \$36 GORF SNAK MAN SERPENTINE \$36 - AND MUCH MORE! Discounts on Large Orders MasterCharge and VISA 1-a Accepted -FREE CATALOG -Name -Address\_ Zip. Cougar Computer Systems 1319 Bailey Ave. Buffalo, NY 14206 Add 3% for (716) 895-0672 Shippina

CIRCLE NO. 105 ON FREE INFORMATION CARD

I WILL BEAT ANY COMPETITOR'S PRICE PROVIDED IT IS NOT BELOW MY COST. TRY TO BEAT THESE IC PRICES

	MARKET STATE OF THE STATE OF TH	
DY	NAMIC RAM	
64K	200 ns	\$5.25
64K	150 ns	5.35
64K	120 ns	5.90
16K	200 ns	1.35
	EPROM	
2764	300 ns	\$6.25
2732	450 ns	4.05
2716	450 ns	3.20
2532	450 ns	4.60
5	STATIC RAM	
6264LP-15	150 ns	\$60.00
6116P-3	150 ns	4.10
2114	200 ns	1.45
2	80A FAMILY	
CPU, CTC,	or PIO	\$3.39
DART		7.99
DMA or SIO	/0	12.50

MasterCard/VISA or UPS CASH COD Factory New, Prime Parts

MICROPROCESSORS UNLIMITED

24,000 South Peoria Av BEGGS, OK. 74421 (918) 267-4961

s subject to change. Call for volume prices. Subject to available quing & Insurance extra. Cash discount prices-shown.

CIRCLE NO. 106 ON EREE INFORMATION CARD

#### **COMPUTERS**

**Buy By Direct** Mail 1-800-841-0860

> Call For Your **Discount Prices**

Write For Free Price List commodore • EPSON

SCM BMITH-CORONA

FRANKLIN • OKIDATA

EAGLE • TRS-80

MICRO MANAGEMENT SYSTEMS

TELEMARKET DEPT. 12

2803 Thomasville Rd. E. • Cairo, Ga. 912-377-7120

CIRCLE NO. 107 ON FREE INFORMATION CARD

#### Get more out of your Apple with the MICRO on the Apple Series

Vols. 1, 2, & 3 \$24.95 + \$2.00 shipping each volume

Each book includes more than 30 programs all on DISKETTE

> Machine Language Aids I/O Enhancements **Runtime Utilities** Graphics & Games Hardware & Reference Information

To order toll free:

1-800-345-8112 In PA 1-800-662-2444 MICRO INK, Dept. CE P.O. Box 6502 Amherst, NH 03301 603-889-4330

CIRCLE NO. 108 ON FREE INFORMATION CARD

#### **MICROSETTE**

#### 51/4-inch DISKETTES

- · Single or double sided, all double density (SSDD, DSDD).
- Soft sector, reinforced hub.

#### CASSETTES

· Error-free computer grade.

ITEM	10 PACK	50 PACK
SSDD	\$25.00	\$100.00
DSDD	35.00	150.00
C-10	7.50	32.50
C-20	9.00	39.00
C-60	11.00	50.00
C-90	15.00	70.00

UPS SHIPPING INCLUDED in Continental USA CA Customers add taxes

MICROSETTE CO. 475 Ellis St., Mtn. View, CA 94043 (415) 968-1604

CIRCLE NO. 109 ON FREE INFORMATION CARD

#### VIC-20

VIC-20 INTERFACING BLUE BOOK
Did you know that your VIC can be used to
control a 99e toy motor so effectively that it
runs like a precision machine? Or that you can
build an accurate digital thermometer using
the VIC and four parts costing less than \$5?
These and other (28) interfacing projects
selected for usefulness, ease of construction
and low cost are detailed in the VIC-20 Interfacing Blue Book, a veritable gold mine of practical information on how to build a variety of interfaces for your computer.

tical information on how to build a variety of interfaces for your computer.
Projects include: Connecting VIC to your stereo; Pickproof digital lock; Capacitance meter; Liquid level sensor; Telephone dialer; Voice output; 8K/16K RAM/ROM expansion; 128K RAM expansion; 8-bit precision D/A; 8-bit A/D converter; MX-80 interface and more.
Written by a college professor in a friendly and informative style, the Blue Book gives you theory of operation, schematics, program

theory of operation, schematics, program listings, parts list, construction hints and sources of materials for each one of the 30 projects.

sources of materials for data.

If you want to get the most out of your VIC this book is a must. Cost is \$14.95 (less than 50e per project!). Price includes postage.

microsignal Dept 9

P.O. BOX 22 MILLWOOD NY 10546

VIC-20

CIRCLE NO. 110 ON FREE INFORMATION CARD

#### S1000

#### **ZX81**



3-Color Keyboard Symbols with Conversion Instructions

- Plastic TS1000-ZX81 keyboard symbols in Black, Red and Blue. Opaque background. Will fit all standard-size keys. Adhesive backing for easy application.
- Simple illustrated instructions will show you how to convert a cheap (about \$20) surplus keyboard to a full-size TS1000/ZX81 console. ... as easy as stringing wire on a fence.
- Do's and Don'ts for selecting a surplus keyboard.
- Bonus for the "pro" Schematic Diagram of Computer.

#### **MULE Electronics**

Dept. 310

444 Lincoln Blvd.

Venice, California 90291

\*Add \$1.50 P&H. California residents add 6.5% tax. Money-back guarantee, of course.

CIRCLE NO. 111 ON FREE INFORMATION CARD

## CORPORATION SEMICONDUCTOR PARTS & PRODUCTS

FACTORY PRIME **DEVICES INCLUDE:** Capacitors — all types & styles • Chokes & Coils • Connectors Digital & Linear IC's Hardware & Accessories IC Sockets • Memory

Resistors - fixed &

Transistors & More

variable • Transformers



MANUFACTURERS SUCH AS: Motorola, National NEC, J.W. Miller, Texas Instruments and more!

WE STOCK & SUPPLY DEVICES FOR: OEM's. Distributors, Hobbiests, Magazine Projects, Engineers Schools, Technicians & You!

Send for FREE Catalog or Call:

(602) 274-2885 P.O. Box 33205 Phoenix, AZ 85067

CIRCLE NO. 112 ON FREE INFORMATION CARD

## 8 то 16 BIT UPGRADE

#### TRUE 16 BIT PROCESSING

- Z8001 Microprocessor (upgradable to Z8003)
- 2 Kx16 Eprom with Monitor Program (E<sup>2</sup>Rom optional)
- 16 Vectored Interrupts
- Full IEEE- 696 (S100) Compliance
- All Z8001 Features available
- · Battery backup time of day clock
- Requires ram capable of word transfers

\*Model M8000 CPU Board \*Model M8000 EE optional E2Rom

firmited warranty (Memory Management Companion Card available 3rd Quarter 1983).

**To order**Call 1-800-821-8858, in New Mexico 1-505-523-0975

or write
Micro Solutions Inc.
Suite 191 A

Include check or money order New Mexico residents add 4,5% sales tax

Las Cruces, NM 88001 Visa and Master Card welcome

CIRCLE NO. 113 ON FREE INFORMATION CARD

Did you know that you can transfer just about any software on expansion ROM cartridges for the VIC-20 onto cassette tape or disc for your own use?

Well, with our board, which plugs into the VIC-20 expansion port and 8k or 16k of expansion RAM, you can copy games (Sargon Chess™) programming aids (VICMON™), music, word processors, and just about anything else on expansion cartridges, for about the price of one cartridge!

only \$34.95 (postage paid in cont. us) Calif. Res. add sales tax.

#### nimrod computer

3823 OCEAN VIEW BLVD. MONTROSE, CA 91020, SUITE 433

CIRCLE NO. 114 ON FREE INFORMATION CARD



eye strain, and debugging time

[28]

NEW! This Universal Pin Identifier (Patent Pending) identifies the pins of 40-pin, 28-pin, 24-pin integrated circuits on the front side. The back side identifies the pins of 22-pin, 20-pin, 18-pin, 16-pin and 14-pin integrated circuits. Just press the side notches against the I.C. pins to locate the pin numbers. Use it for wire-wrapping and debugging. Every hardware designer should have one. Only \$3.50 plus 456 for shipping and handling. Texas residents add 5% sales tax.

**CREATIVE DEVICES** P.O. Box 49184 Austin, TX 78765

CIRCLE NO. 115 ON FREE INFORMATION CARD

#### **GOT A TS-1000 ? GET STARTED WITH** BOSS SOFTWARE

DISCOUNT



CASSETTE PROGRAMS FOR THE **TIMEX 1000/1500 COMPUTERS** 

GAMES, BUSINESS, EDUCATION, TUTORIAL



START YOUR OWN SOFTWARE COMPANY ON A SHOESTRING DUPLICATE 1 TO 50 CASSETTES WITH THE DIGITALIZER AMPUFIED CLEAN COPY OUTPUT, INEXPENSIVE, PROFESSIONAL CASSETTE DUPLICATING EQUIPMENT AND WE SHOW YOU HOW!

#### WRITE FOR FREE CATALOG



**EULYN ENTERPRISES 4N 650 RIDGEWOOD** BENSENVILLE, IL., 60106 (312) 832-1599

CIRCLE NO. 116 ON FREE INFORMATION CARD

#### TAIWAN

- Manufacturing is both cheaper and quality controlled.
- Are manufacturing cost cutting deeply into your profits?
- We can save you from 25 to 35% Mfg part or whole. All orders accepted after exchange of samples.
- We Mfg., Computer parts, Plastic, Steel, Cast Iron, & Others.
- If you have a sample or a blue print, write for a quotation to:
- **G.S.C IMPORT & EXPORT** Products Research & Mfg. P.O. Box 901 So. Pasadena, CA 91030 Telex: 295385 GSCC UR

CIRCLE NO. 117 ON FREE INFORMATION CARD

#### **COMMODORE OWNERS!**

#### **New Releases From** Home Software Co.

Nutridata - food value program The Wizard - 5 level math tutor Mediavide - home health aid The Black Book - phone list Compucise - exercise guide

#### 13.95-Tape 17.50-Disk FREE BROCHURES

Home Software Co. P.O. Box 206 Bridgewater, VA (703) 434-8418

.....for useful home software

CIRCLE NO. 118 ON FREE INFORMATION CARD

#### Texas Instruments

Atari 400, 800, and the new 1200XL Commodore 64, Vic 20, Eagle, ACE 1000, Hewlett Packard, Kaypro II Osborne, Sanyo, Otrona, NEC, Columbia, Data, Altos, Amdek, Okidata

- \* Call us toll-free for low prices and friendly service.
- \* Full line of hardware and software.
- Fast service most orders shipped within 24 hours.

Toll-free 800-327-8133 In FL 305-266-5981 9AM - 6PM EST

**InterContinental Computer** 5724 SW 20 Street, Miami, FL, 33155

All our products are new warranted equipment. Please call for handling charges or C.O.D. Non certified checks allow 1 to 2 weeks to clear

CIRCLE NO. 119 ON FREE INFORMATION CARD

#### IER LINE PROBLEMS?



#### SPIKE-SPIKERS<sub>TM</sub>...The Solution!

Minimize equipment damaging spikes and conducted RF noise to or from sensitive equipment. Transient surge protection plus low pass RFI hash filtering. All units 120V 15A.



MINI II \$44.95 Wall Mount

3-stage filter 2 sockets

QUAD II \$59.95 Wall mount. Dual 3-stage filter 4 sockets & light

**DELUXE \$79.95** Dual 5-stage filtered ckts. 8 switch sockets main switch, fuse, light



Kalglo Electronics Co., Inc. Order Factory Direct

65 84 Ruch Rd., Dept. C E Bethlehem PA 18017

215-837-0700

800-523-9685 DEALERS INVITED PA Res. Add 6% • COD add \$3.00 + Shipping

CIRCLE NO. 118 ON FREE INFORMATION CARD



LEO ELECTRONICS, INC. 8921 S. Sepulveda # 208 Los Angeles, CA. 90045 (213) 641-3101 (800) 421-2418 TLX: 664-688 Interline LSA

#### LOOK!!

#### LOW PRICES

RAMS	EPROMS		IS
4116 (200ns) 4116 (150ns) 4164 (200ns) 4164 (150ns) 2114 (200ns) 6116P-3	1.10 1.25 4.65 4.85 1.50 4.25	2708 2716 2716-1 TMS 2716 2732 2532	2.50 3.20 5.00 4.75 3.95 4.50
MICROPROCES	SORS	2764	8.00
Z-80A 8080A 8085A	4.50 2.75 6.00	ALL TO-220	75

TERMS: Check, Visa, Mastercard. Call for C.O.D.
U.S. Funds only. California residents add 6½% sales tax
SHIPPING: Add \$2.00 for Ground and \$5.00 for Air.
ALL MAJOR MANUFACTURERS ALL PARTS 100% GUARANTEED

**Put 64K CP/M 2.2** in your TRS-80 Model

Our plug-in Shuffle-board III comes with 16K and gives you the full power of 64K CP/M 2.2, the industry standard operating system



operating system.
Tap into over 2,000 off-the-shelf business programs such as dBASE II, SuperCalc, WordStar, etc.
READ/WRITE and RUN software from Osborne, Xerox, Superbrain, Kaypro II, HP 125 and TeleVideo. You can even READ/WRITE IBM PC software for CP/M 86.

CP/M 86.

Simple to install. Shuffleboard III plugs into two existing sockets inside your Model III. No permanent modifications, no cut traces, no soldering, You'll be up and running in minutes. For only \$299. Includes MBASIC Interpreter, a software manual and a first class user's manual. Coming soon: an 80 x 24 Video Board and a Floppy Disk Controller. See the Shuffleboard at your local computer

See the Shuffleboard at your local computer store or order directly from us. Credit card orders shipped directly from stock. Sorry, no COD's. Free 12 page brochure. Call (415) 483-1008

Memory Merchant

CIRCLE NO. 120 ON FREE INFORMATION CARD

Just let us know and we'll mail you a FREE Creative Computing Catalog-16 pages filled with books, buyer's guides, magazines, and more!

To get your FREE catalog, write to: Creative Computing Catalog, Dept NAIX 39 East Hanover Ave., Morris Plains, NJ 07950.







## **Electronics**

Dept. P.E. - 1117 Conway Avenue Mission, Texas 78572 (512) 581-2766 Telex 767339

CIRCLE NO. 122 ON FREE INFORMATION CARD

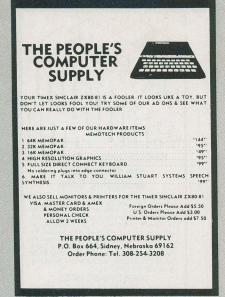

CIRCLE NO. 123 ON FREE INFORMATION CARD



Generate any custom waveform with the Apple Computer.

- analog and digital outputs up to 20 volts p-p output
  125 ns/pt — 1 sec/pt
  up to 2048 points
  - 8 bit resolution



**Pacific** Micro Systems

1)60|GATE 5 ROAD • SAUSALITO, CA. 94965 • (415) 331-2525

CIRCLE NO. 124 ON FREE INFORMATION CARD

#### R.I.S.T. INC. ANNOUNCES Subscription to Syntax Q

Purchase A Parrot Speech Synthesizer; receive:

SPEECH SYNTHESIZER

A Subscription to SQ "\$15. VALUE FREE"
Phrase Finder Program "\$5. VALUE FREE"
\$peech Synthesis Manual "\$10. VALUE FREE"
\*ACT NOW: Receive Poker Game Cartridge
"\$15. VALUE FREE"

TIMEX/SINCLAIR - Speech Synthesizer
plug-in module. FREE subscription ... 89.95
to SQ, TALKING Poker Game Cartridge
Phrase Finder Cart., Speech Manual
T/S Speech Synthesizer Kit comp. ... 59.95 T/S Speech Synthesizer Kit compl. with PC Board & all components. 59.95 +3.sh APPLE II, II+; TRS80 I, III, Color; VIC-20 Speech Synthesis Starter Kits. ALL KITS include Free: +2.sh Subscription to Computer Shopper, Speech Manual, Phrase Finder List. 9v, 2amp POWER SUPPLY for the T/S SURGE FREE transient absorber, 24.95 +2.sh eliminates destructive surges. 2 socket - 69.95, 6 socket - 89.95, 10 socket - 99.95. Add \$3.00 S/H. Inquire about our complete line of TALKING Software Programs

\*\* 10 Day Money-Back Guarantee \*\* Send check or M.O. COD add \$1.50 to: R.I.S.T. Inc. Dept. CE883, P.O. Box. 499 Ft. Hamilton Station, Brooklyn, NY 11209 212-259-4934

CIRCLE NO. 125 ON FREE INFORMATION CARD

#### TIMEX/SINCLAIR ZX/81 **Camex** P.O. Box 50 Utica, MI 48087 INTL Full Size 43 Key Keyboard with Single Key Selection of FUNC-TION, SHIFT LOCK and GRAPHIC MODES. 2 LED Mode Indicators • Simple Plug In Installation • Fully Enclosed . . only \*59.95 | 54 K RRM PACK . . . \*99.95 | 16 K RAM PACK . . . . . '39.95 Keyboard (case & numeric pad) . . . . Hi Res Graphics Board . . \*49.95 Horse Master Panzer SS Bill Master Budget Ma Bill Master

Check or Money Order. Add \$5.00 s/h Michigan Residents Add 4% Tax CIRCLE NO. 126 ON FREE INFORMATION CARD

### TIMEX SINCLAIR SINCLAIR ZX81 SOFTWARE CALL OF WITHERSON FREE CATALOG SOFTSYNC, INC. 14 E. 34th St. NY. NY 10016 212-685-2080

CIRCLE NO. 127 ON FREE INFORMATION CARD

#### rrs-80 COMPUTER DISCOUNTS

- Factory Direct
- Best Prices Anywhere
- No Out-of-State Taxes
- 100% Radio Shack Warranty
- Free Price List

#### SCOTT TASSO **ASSOCIATES**

175 North Delsea Drive Vineland, N.J. 08360 800-257-0426

NJ 609-691-7100

CIRCLE NO. 128 ON FREE INFORMATION CARD

#### \$1,295.00 **Z-80-6502** COMPUTER SYSTEM

DISK DRIVE, DRIVE CARD, MONITOR

SYSCOM\* \$550.00 ORANGE\* \$650.00 FRANKI IN CALL **GEMINI 10** \$375.00

Haves Micromodern \$275, Incredible, lack \$100 Slimline Drive \$255.Regular Drive \$245. \$110Z-80 Card 80 Col. Card \$100 Cooling Fan \$55.Syscom\* Bare Board \$55. Disk Drive Card \$6516K Card Parallel Printer Card \$65.

#### **!! WE WILL BEAT ANY PRICE!!**

Softsell Systems

9600 Roosevelt Blvd., Suite 100, LL Philadelphia, Pa. 19115

(215) 665-5639

CIRCLE NO. 129 ON FREE INFORMATION CARD









CASSET

Data media for all microcomputers. Used nationwide by software manufacturers, hobbyists, schools and businesses. Premium 5-screw shell with leader fits all standard recorders.

SATISFACTION GUARANTEED OR MONEY BACK.

ITEM	1 DOZ.	2 DOZ.
C-05	7.50	□ 13.50
C-10	8.00	□ 14.40
C-20	□ 10.00	□ 18.00
Hard Box	2.50	□ 4.00

Send for free brochure. Ask for quantity discounts. Calif. residents add sales tax. SHIPPING. HANDLING (UPS) 1 doz. \$2; 2 doz. \$3.50; 3 doz. \$4.50; ea. additional doz. \$5.50. For parcel post instead of UPS add \$1. Outside Continental USA, add \$2.

FOR IMMÉDIATE SHIPMENT USE YOUR VISA OR MASTERCARD CALL 213/710-1430

**YORK 10**™Computerware

24573 Kittridge St., P1 Canoga Park, CA 91307

CIRCLE NO. 136 ON FREE INFORMATION CARD

#### COMPUSETTE

- Precision 5 Screw Cassette
- Premium Quality Tape
- Labeled Both Sides
- Individually Boxed
- Freight Paid On All Orders
- **Guaranteed Against Defects**

COMPUSETTE + COMPUSETTE + 5 MIN. PER SIDE) (10 MIN. PER SIDE) \$22.50 (90°) \$80.00 (80°) \$365.00 (72°) \$20.00 (80°) \$70.00 (70°) \$330.00 (66°)

OUT OF STATE (800)527-1227 TEXAS (214)349-0081 C.O.D





VISA

EACH CASSETTE INCLUDES CASSETTE TEXAS
INCLUDES RESIDENTS
A NORELCO ADD 5%
CONTAINER SALES TAX

\$365.00 (73°)

**BUY NOW SAVE 10%** 

P.O.BOX 38651 **DALLAS, TX 75238** 

CIRCLE NO. 131 ON FREE INFORMATION CARD

#### TOROIDAL POWER TRANSFORMERS Small size . Low noise . Easy mounting



Ideal for audio amps, CRT monitors and computers where low hum is re-

Includes mounting washer with center hole for screw.

Examples of 117V-60Hz transformers in stock:

Size-Weight ODxH	Secondaries* Volts/Current	Unit price	in qty 2-4
40VA-1.1 lbs 2.8"x1.3"	2x8.5V/2.3A 2x12V/1.67A 2x15V/1.33A 2x24V/.83A	\$29.00	\$24.40
100VA-2.2 lbs 3.7"x1.4"	2x8.5V/5.8A 2x12V/4.1A 2x15V/3.3A 2x18V/2.7A	\$33.00	\$28.60
340VA-3.3 lbs	220V/1.55A	\$53.60	\$46.50
4.5"x2.3"	2x24V/7.1A 2x30V/5.7A	\$56.50	\$46.50


\*May be used separately, in parallel, or in series

Call to order or write for listing of off-the-shelf toroidal trans formers 20VA-600VA
Terms: C.O.D., VISA, MASTERCARD or Money Order Shipping: Add \$1.00/lbs for UPS (+ \$1.50 for C.O.D.),

(301) 459-8898 TOROID CORPORATION OF MARYLAND 4720-Q Boston Way, Lanham, MD 20706

CIRCLE NO. 132 ON FREE INFORMATION CARD

#### CONVERT ANY TV TO A HIGH QUALITY MONITOR



Kit permits Dual Mode operation on B&W or Color sets
• Hi-resolution • Up to 80 characters per line • Wide I Video • Safe-Easy installation

Wide bandwidth Direct

A full line of low cost Monitors and Receiver/Monitors available

Send for complete Audio/Video equipment catalog.

V.A.M.P. Inc. Box 411, Los Angeles, CA 90028 (213) 466-5533

CIRCLE NO. 135 ON FREE INFORMATION CARD

#### **★**MICROCOMPUTER★ BUSINESS SOFTWARE

MEDICAL MGMT... DENTAL MGMT... INSURANCE AGENT LEGAL BILLING.... PROPERTY MGMT.. AND MUCH MORE!

#### UNIVAIR INTERNATIONAL

9024 St. Charles Rock Road ST. LOUIS, MISSOURI U.S.A. 63114

(314) 426-1099

CIRCLE NO. 134 ON FREE INFORMATION CARD

### COMPUTER MART **FORMAT** 2" X 3"

**PICTURE YOUR AD HERE!** 

**NEXT CLOSING DATE:** AUG 3

#### 64K INSIDE!!

T/S1000 7X81

> No wobbles! No bulky add-ons! No fear of crashing if bumped!

The 64KT and 64KZ are 64k of user transparent memory which mount INSIDE the TS1000 or ZX81 (respectfully).

In installs in aminute with NO soldering, and easy to follow instructions. Of, if you prefer get the memory you want in a kit that you can put together, all the parts needed are included.


The 64KT = TS1000 with ser. no. prefix F or P The 64KZ = TS1000 with ser. no. T or D or ZX81

To order, send the part number you need, and check or money order (add 4.00 for shipping and handling) to:

INDEPENDENCE RESEARCH P.O. BOX 1497 **OREM, UTAH 84057** 

CIRCLE NO. 137 ON FREE INFORMATION CARD

#### **EPROM Programmer** Only \$146



PROGRAMS

- 4K INTERNAL RAM BUFFER STORAGE CAPACITY.
- NO PERSONALITY MODULE REQUIRED.
- POWER CAN BE REMOVED FROM ZIF SOCKET WHEN LOADING EPROMS.
- BINARY ADDRESS AND DATA DISPLAY.
- INDEPENDENT UNIT VERIFIES, PROGRAMS, INPUTS DATA FROM BINARY KEYBOARD, LOADS DATA FROM EPROM TO RAM, AND CHANGES ANY BEAT OF DATA.

ANGO ELECTRONICS CORP.
P.O. BOX 112
HARRISON, NJ 07029

MAIL ORDERS: PLEASE ADD \$3.00 FOR HANDLING CHARGES
WEW JERSEY RESIDENTS: PLEASE ADD 6% SALES TAX

CIRCLE NO. 138 ON FREE INFORMATION CARD

#### Now we can make any computer sing as well as talk, for only \$219.



As featured in Ciarcia's Circuit Cellar BYTE" Magazine, October 1982.

Microvox.

MICROVOX is a completely self contained professional voice quality text-to-speech synthesizer MICROVOX may be easily interfaced to any computer, modem.

- RS-232C serial or parallel output device

   6502 Microprocessor based text-to-speech algorithm

   SC-01A phoneme based speech synthesizer
- 64 crystal controlled inflection levels
   3000 character buffer
   RS-232C and parallel port interfaces.
- On board power supply
  Music and sound effects capability

MV02 Microvox, complete kit



**To Order**: Call Toll Free 1-800-645-3479 **In N.Y**. 1-516-374-6793 MICROMINT, INC. 561 Willow Avenue Cedarhurst, NY 11516

CIRCLE NO. 139 ON FREE INFORMATION CARD

TRS-80+ MOD I, III, COCO, TI99/4a TIMEX 1000, OSBORNE, others

#### **GOLD PLUG-80**

Eliminate disk reboots and data loss due to oxidized contacts at the card edge connectors. GOLD PLUG 80 solders to the board edge connector. Use your existing cables. (if gold plated)

GOLD PLUG 80 Mod I (6)	\$54.95
Keyboard/El (mod l)	18.95
Individual connectors	9.95
COCO Disk Module (2)	18.95
Ground tab extensions	1.00
Disk Drives (all R.S.)	9.95
Gold Disk Cable 2 Drive	29.95
Four Drive Cable	39.95
GOLD PLUG 80 Mod III (6)	54.95
Internal 2 Drive Cable	29.95
Mod III Expansion port	10.95
USA shipping \$1.45	Can/Mex \$4.
Foreign \$7.	TEXAS 5% TAX

E.A.P. CO. P.O. BOX 14 KELLER, TEXAS 76248

MC/VISA

+ trademark Tandy Corp

VISA

## Shelf Conscious

Now you can organize your copies of

#### **Computers&Electronics**

Now your magazines can be a handsome addition to your decor, well organized, and easy to find, thanks to these durable libraryquality cases or binders. They're made of luxury-look leatherette over high-quality binders board. And both styles are customdesigned for this or any magazine you save, with size, color, and imprint selected by the publisher. FREE transfer foil included for marking dates and volumes.



#### Magazine binders

hold your issues on individual snap-in rods, combining them into one volume. \$7.95 each; 3 for \$22.50; 6 for \$42.95. Mixed titles OK for quantity prices.



#### Open-back cases

store your issues for individual reference. \$6.95 each; 3 for \$19.75; 6 for \$37.50. Mixed titles OK for quantity prices.

Address

City/State/7in

\*PA residents add 6% sales tax.

CHARGE ORDERS ONLY for your convenience PHONE 24 HRS. TOLL-FREE 800-526-0790. In NJ only 201-540-0445. USE THIS COUPON -

Computers & Electronics

P.O. Box 5120, Philad	
Please send:  Cases TITLE	☐ Binders QUANT.
Computers & Electronic	s:
(Other):	
☐ ENCLOSED IS \$	ndling. Outside USA red. Send U.S.
Card #	
Exp. Date	
Signature	
Print Name	

#### **Computers&Electronics**

#### **ADVERTISERS INDEX**

RS no.	ADVERTISER	PAGE no.
50 3 35 55	Active Electronics All Electronics Corp Apple Computer Artec Electronics	105
29 19 60 11	C & D Electronics	111-120 36-39 3 5 62
67 14 66	DAK Industries	108-109
51 25	Electronic Specialists Epson America	
26 18	Firestik Antenna Corp Focus	
24 65	Heath Co	
10	INMAC	61
21 22 23	Jameco Electronics JDR Microdevices J & R Music World	106-107
20	Leading Edge	Cover 4
48 30,7 31	Macmillan Book Clubs, Inc. 3M Company Maxell McIntosh Laboratory, Inc	13 . Cover 2, 49
17	National Technical Schools Netronics, R & D Ltd New Horizons NRI Schools	105
40,69	Protecto Enterprises	35,59
	Radio Shack	43,110
36 38,77 37	Scientific Systems	103 . Cover 3, 51
39 42 82	Tab Books	102

## FREE INFORMATION:

Learning more about a product that's advertised or mentioned in an article in this month's issue is as simple as one, two, three. And absolutely free.

Print or type your name and address on the attached card. Use only one card per person.

Circle the number(s) on the card that corresponds to the number(s) at the bottom of the advertisement or article for which you want more information.

(Key numbers for advertised products also appear in the Advertisers' Index.)

Simply mail the card, and the literature will be mailed to you free of charge from the manufacturer.

## FREE INFORMATION:

This address is for our product Free Information Service only. Editorial inquiries should be directed to COMPUTERS & ELECTRONICS. One Park Avenue, New York, N.Y. 10016.

AD	DRI	ES	<b>S</b> _				-												
CIT	Y		81						_s	TA	TE.					ZIP.			
(	Zip C	ode	mus	t be	incl	uded	to i	nsure	e del	ivery	/.) (V	oid a	after	Octo	ber	31, 1	1983	3)	
A D	e you p   Micro   Video   Audic	comp Gam	outer		B E	ny of the Soften Project Ham	ware ection	TV	C.	□ V	ideo ( arth S	Casse	tte Re	corde					
	Plea							mpu	ters	& E	ectr	onic	s for	\$12	.97 a	ınd b	oill m	ne.	
	Sub							•	10		10	10	14	15	10	17	10	10	20
1 21	2 22	3 23	4 24	5 25	6 26	7 27	8 28	9	10	11 31	12	13	14	15 35	16 36	17 37	18	19	20 40
41	42	43	44	45	46	47	48	49	50	51	52	53	54 74	55 75	56 76	57 77	58 78	59 79	60 80
61 81	62 82	63 83	64 84	65 85	66 86	67 87	68 88	69 89	70 90	71 91	72 92	73 93	94	95	96	97	98		100
	102 122	123	124	125		127	128	129									118 138		
	ONLY	ONE															CE 8	383	5
	ME		JY I	NA	ME	(If a	app	licat	ole)									3	
	DR	ES	S_											175			100		
	(Zip (	ode.	mu	st be	incl	udec	to i						after					3)	
	(2.15	Jouo		0. 00		uuuu		,,,,,,	0 00		1.7		unto	00.	000.	01,		,	
D. [	Micro	ocom o Gan	puter ne		B. [ E. [	Sof	tware jection	n TV	C		/ideo Earth	Cass Satell	welve ette R	ecord	er				
D. [ G. [	Micro Vide	ocom o Gan o Equ	puter ne iipmei	nt	B. [ E. [ H. [	Sof Pro Har	tware jection n Equ	n TV ipmen	C F		/ideo Earth Fest In	Cass Satell nstrum	ette R ite Re nents	ecord ceiver	er	and	hill r	ne	
D. [ G. [	Micro	ocompo Gan	puter ne nipmer	nt me (	B. E. E. H. C	Sof Pro Har	tware jection n Equ	n TV ipmen	C F		/ideo Earth Fest In	Cass Satell nstrum	ette R ite Re nents	ecord ceiver	er	and	bill r	ne.	
D. G. C	Micro Video Audi Plea	o Gan o Equ ase s bscri	puter ne nipmer end iptio 4	me on Pr	B. E. H. Cone york	Soft Project P	tware jection n Equ of Co	n TV ipmen omp	t for the state of		/ideo Earth Fest In	Casse Satell Instrum	ette Reite Renents	ecord ceiver r \$12	er 2.97	17	18	19	20
D. G. C	Micro Vide Audi Plea III Sul 2 22 42	ase s bscri 3 23 43	end iptio 4 24 44	me on Pr 5 25 45	B E H ice \$ 6 26 46	Sof   Pro   Har   Har   15.9   7   27   47	of Co	ompo	10 30 50		/ideo Earth Test In Elect 12 32 52	Casse Satell Instrum 13 33 53	ette Rite Renents cs fo	r \$12	2.97 16 36 56	17 37 57	18 38 58	19 39 59	40 60
D. G. C	Micro Video Audi Plea	o Gan o Equ ase s bscri	puter ne nipmer end iptio 4	me on Pr	B. [ E. ] H. [ One ) ice \$	Sof   Pro   Har   Har   15.9   7   27	of Control 8 28 48 68	ompo	10 30 50 70		/ideo Earth Test In Elect 12 32 52 72	Casse Satell Instrum	ette Reite Renents	r \$12	2.97 16 36	17 37	18 38	19 39	40
D. G.	Micro Video Audi Plea III Sul 2 22 42 62 82 102	ase s bscri 3 23 43 63 83 103	end iptio 4 24 44 64 84 104	me on Pr 5 25 45 65 85 105	B. E. H. Cone yice \$ 6 26 46 66 86 106	Sof   Proj   Har   15.9   7   27   47   67   87   107	of Co	9 29 49 69 89 109	10 30 50 70 90	8 & E  11  31  51  71  91  111	/ideo Earth Fest In 12 32 52 72 92 112	ronic 13 33 53 73 93 113	ette Retite Renents  cs fo  14  34  54  74  94  114	15 35 55 75 95	2.97 16 36 56 76 96 116	17 37 57 77 97 117	18 38 58 78 98 118	19 39 59 79 99 119	40 60 80 100 120
D	Micro Video Audi Plea III Sul 2 22 42 62 82 102	ase s bscri 3 23 43 63 83	end iptio 4 24 44 64 84	me on Pr 5 25 45 65 85	B. E. H. Cone yice \$ 6 26 46 66 86	Sof   Proj   Han   15.9   7   27   47   67   87	of Co	9 29 49 69 89	10 30 50 70 90		/ideo Earth Fest In Elect 12 32 52 72 92	ronic 13 33 53 73 93 113	ette Retite Renents  cs fo  14  34  54  74  94  114	15 35 55 75 95	2.97 16 36 56 76 96	17 37 57 77 97	18 38 58 78 98	19 39 59 79 99	40 60 80 100
D. G. (Fu 1 1 21 41 61 81 101 121 USE	Micro Video Audi Plea III Sul 2 22 42 62 82 102	ase s bscri 3 23 43 63 83 103 123	puter ne end iptio 4 24 44 64 84 104 124	me (n Pr 5 25 45 65 85 105 125	B. E. H. Some your sice \$ 6 26 46 66 86 106 126	Sofri Proj Proj Harring 15.9 7 27 47 67 87 107 127	tware iection n Equ	9 29 49 69 89 109	10 30 50 70 90	8 & E  11  31  51  71  91  111	/ideo Earth Fest In 12 32 52 72 92 112	ronic 13 33 53 73 93 113	ette Retite Renents  cs fo  14  34  54  74  94  114	15 35 55 75 95	2.97 16 36 56 76 96 116	17 37 57 77 97 117	18 38 58 78 98 118 138	19 39 59 79 99 119	40 60 80 100 120 140
D. G. (Fu 1 21 41 61 81 101 121 USE	Microsian Micros	ocomio o Gamo o Equi	puter ne end ptio 4 24 44 64 84 104 124 E CA	me on Pr 5 25 45 65 85 105 125 RD P	B. E. H. Some your state of the	Soft Soft Soft Soft Soft Soft Soft Soft	tware election in Equi	9 29 49 69 89 109 129	10 30 50 70 90 110 130	& E E E 111 311 511 711 911 1131	/ideo Earth Fest In 12 32 52 72 92 112 132	Cassis Satell Instrum  13 33 53 73 93 113 133	14 34 54 114 134	15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Vide Audi	ase s sbscri 3 23 43 63 83 103 123	end iptio 4 44 44 64 84 104 124 E CA	me on Pr 5 25 45 65 85 105 125 RD P	B. E. H. Some your state of the	Soft Soft Soft Soft Soft Soft Soft Soft	tware election in Equi	9 29 49 69 89 109 129	10 30 50 70 910 1130 130 130 130 130 130 130 130 130	8 & E  11 31 51 71 91 111 131	12 32 52 72 92 112	Cassis Satelli nstrum  ronid  13 33 53 73 93 113 133	cs fo  14 34 54 74 94 114 134	r \$12 15 35 55 75 95 115 135	2.97 16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138 CE	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Vide Notes of the Notes o	ase s bscri 3 23 43 63 83 103 123	puter ne diption 4 4 4 4 4 4 4 4 104 124 E CA	me (con Pr 5 25 45 65 85 105 125 PRD Pr	B. E. H. H. Shine Ship Ship Ship Ship Ship Ship Ship Ship	Soft Project P	of Control	9 29 49 69 89 109 129	100 300 500 700 900 1100 1300 1300 1300 1300 1300 130	111 31 131 131 131 131 131 131 131 131	Flect  12 32 52 72 92 112 132	Cassis Satelli nistrum  ronic  13 33 53 73 93 113 133	cs fo 14 34 54 74 94 114 134	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138 CEE	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Vide Audi	ase s bscri 3 23 43 63 83 103 123	puter ne diption 4 4 4 4 4 4 4 4 104 124 E CA	me (con Pr 5 25 45 65 85 105 125 PRD Pr	B. E. H. H. Shine Ship Ship Ship Ship Ship Ship Ship Ship	Soft Project P	of Control	9 29 49 69 89 109 129	100 300 500 700 900 1100 1300 1300 1300 1300 1300 130	111 31 131 131 131 131 131 131 131 131	Flect  12 32 52 72 92 112 132	Cassis Satelli nistrum  ronic  13 33 53 73 93 113 133	cs fo 14 34 54 74 94 114 134	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Vide Notes of the Notes o	ase s bscri 3 23 43 63 83 103 123	puter ne diption 4 4 4 4 4 4 4 4 104 124 E CA	me (con Pr 5 25 45 65 85 105 125 PRD Pr	B. E. H. H. Shine Ship Ship Ship Ship Ship Ship Ship Ship	Soft Project P	of Control	9 29 49 69 89 109 129	100 300 500 700 900 1100 1300 1300 1300 1300 1300 130	111 31 131 131 131 131 131 131 131 131	Flect  12 32 52 72 92 112 132	Cassis Satelli nistrum  ronic  13 33 53 73 93 113 133	cs fo 14 34 54 74 94 114 134	r \$12 15 35 55 75 95 115 135	2.97 16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Video Micro	ase s bscri 3 3 43 63 83 103 123	end diptio 4 44 44 64 84 104 124 EE CA	me (cn Pr 5 25 45 65 85 105 125 PRD Pr NA	B. E. H. E.	Soft   Proj	of Circles and Cir	n TV ipmen 9 29 49 69 89 109 129	10 30 50 110 130 130 150 160 160 160 160 160 160 160 160 160 16	8 E 111 311 511 711 1311 1311 1311 1311 131	/ideo Earth   Fest In   Fe	Cassis Satellinstrum  133 333 53 73 93 113 133	es fo 14 34 54 74 94 113 after	15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Video Audi Video	ase s bscrii 3 43 63 83 103 123 Code	end option 4 24 44 64 84 104 124 E CA	me (cn Pr 5 25 45 65 85 105 125 PRD Pr NA	B E H E H E H E E	Soft Project Soft Soft Soft Soft Soft Soft Soft Sof	of Circles and Cir	n TV ipmen 9 29 49 69 89 109 129	10 30 50 70 90 1100 1300 1300 Serve de		/ideo Earth Fest Infect	Cassis Satellinstrum  133 333 53 73 93 113 133 Void	ette Rette Rette Renents  14 34 54 74 94 114 134  afte	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro you Micro	ase s bscrii 3 23 43 63 83 103 123 V ONI	end option 4 24 44 64 84 104 124 E CA	me con Pr 5 25 45 65 85 105 125 PRD P	B. E. H. E.	Soft Project Soft Soft Soft Soft Soft Soft Soft Sof	of Circles	n TV ipmen 9 29 49 69 89 109 129	10 30 50 70 90 110 130 Serve de		/ideo Earth   12   32   52   72   92   112   132   TE	Cassis Satellinstrum  133 333 53 73 93 113 133 Void	ette Rette Rette Renents  14 34 54 74 94 114 134  afte twelvette Felite Rette	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G. C.	Micro you Micro	ase s bscrii 3 23 43 63 83 103 123 V ONI	end option 4 24 44 64 84 104 124 E CA	me con Pr 5 25 45 65 85 105 125 PRD P	B E H E H E E E E	Soft Project Soft Soft Soft Soft Soft Soft Soft Sof	of Circles	n TV ipmen 9 29 49 69 89 109 129 129 iinsu	10 30 50 70 90 110 130 Serve de		/ideo Earth   12   32   52   72   92   112   132   TE	Cassis Satellinstrum  133 333 533 73 93 113 133 Void de next	ette Rette Rette Renents  14 34 54 74 94 114 134  afte twelvette Felite Rette	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G. C.	Micro Vide Vide Vide Vide Vide Vide Vide Vide	ase s bscri 3 3 43 63 83 103 123 Code planrocompo Gario Equi	end option 4 44 44 64 84 104 124 E CA	me (cn Pr 5 25 45 65 85 105 125 NA	B. E. H. E. H. E. B. E. E. H. E. H. E. H. E. H. E. H. E. H. E. E. E. H. E. E. E. H. E.	Soft Project P	of Circles and the following services are services and the following services and the following services are services as the services are services as the following services are services as the services	n TV ipmen  9 29 49 69 89 109 129  insu insu insu	10 30 50 70 90 110 130 Serve de	8 & E  11	/ideo Earth   12   32   52   72   92   112   132   TE   Ty.) (( in the Wideo Earth Test In Tes	Cassis Satellinstrum  133 133 133 133 133 133 Void de next 0 Cassis Satelnistrum	ette Rette Rette Renents  144 344 54 74 94 114 134  afte  afte	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138 CEE	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Vide Audi Please 11 Sul 2 22 42 62 82 102 102 102 102 102 102 102 102 102 10	ase s bscri 3 3 43 63 83 103 123  Code planroccompo o Gario Equi	end option 4 24 44 64 84 124 124 ECA	me con Pr 5 25 45 65 85 85 125 Pr NA	B. E. H. E. H. E. Service & G. & G	Soft Project P	tware iection in Equi	n TV ipmen  9 29 49 69 89 109 129  insu insu	10 30 50 70 90 110 130 Serve de	8 & E  11	/ideo Earth   12   32   52   72   92   112   132   TE   Ty.) (( in the Wideo Earth Test In Tes	Cassis Satellinstrum  133 133 133 133 133 133 Void de next 0 Cassis Satelnistrum	ette Rette Rette Renents  144 344 54 74 94 114 134  afte  afte	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 78 98 118 138	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G. C.	Micro Vide Audi Please 102 102 102 102 102 102 102 102 102 102	ase s bscri 3 3 43 63 83 123  YONE  Code plann oo Gario coom plann oo Gario coom coom coom coom coom coom coom co	end ptio 4 24 44 64 84 104 124 E CA	me con Pr 5 25 45 665 85 105 105 125 NA	B. E. H. E. H. E. H. E. E. E. E. H. E. E. E. H. E.	Soft Project P	of Control	n TV ipmen  9 29 49 69 89 109 129  Licat insu insu comp	10 30 50 70 90 1100 1130 Serve de	8 E 11 31 51 71 131 131 131 131 131 131 131 131 131	/ideo Earth   Fest In   Fe	Cassis Satellinstrum  13 33 53 73 93 113 133 133 133 133 133 133 133 133	este Rette Rette Renents  14 34 54 74 94 114 134  afte Rette	15 35 55 75 95 115 135 135 r Oct	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 58 78 98 118 138 138 CEE	19 39 59 79 9119 139 <b>8833</b>	40 60 80 100 120 140 44
D. G.	Micro Vide Audi Please 11 Sul 2 22 42 62 82 102 102 102 102 102 102 102 102 102 10	ase s bscri 3 3 43 63 83 103 123  Code planroccompo o Gario Equi	end option 4 24 44 64 84 124 124 ECA	me con Pr 5 25 45 65 85 85 125 Pr NA	B. E. H. E. H. E. Service & G. & G	Soft Project P	tware iection in Equi	n TV ipmen  9 29 49 69 89 109 129  insu insu	10 30 50 70 90 110 130 Serve de	8 & E  11	/ideo Earth   12   32   52   72   92   112   132   TE   Ty.) (( in the Wideo Earth Test In Tes	Cassis Satellinstrum  13 33 53 73 93 113 133 133 133 133 133 133 133 133	ette Rette Rette Renents  cs fo  144 344 544 744 944 1134 244 245 246 246 247 247 247 247 247 247 247 247 247 247	r \$12 15 35 55 75 95 115 135	2.97  16 36 56 76 96 116 136	17 37 57 77 97 117 137	18 38 58 58 78 98 118 138 CCE	19 39 59 79 99 119 139	40 60 80 100 120 140
D. G.	Micro Vide Audi	ocomio Gano Equi	end option 4 24 44 64 84 104 124 E CA	me (c) 105 125 105 125 105 125 105 125 105 125 105 125 105 125 105 125 105 125 105 105 105 105 105 105 105 105 105 10	B. E. H. E. H. E. C. H. E. H. E. C. H. E. H. E. C. H. E. H. E. H. E. C. H. E. H. E. C. H. E. H. E. H.	Soft Project P	tware election in Equi	omposition of the second of th	10 30 50 70 90 110 130 Serve de 10 30 50 50 50 50 50 50 50 50 50 50 50 50 50		/ideo Earth   12   32   52   72   92   112   132	Cassis Satellinstrum  13 33 53 73 93 113 133 133 133 133 133 133 133 133	afte ettwelvette Filite Renents  afte ettwelvette Filite Renents  cs fo	15 35 55 115 135 135 135 135 135 135 135	2.97  16 36 56 76 96 116 136 136 136 136 136 136 136 136 13	17 37 57 77 97 117 137 137 31,	18 38 58 78 98 118 138 138 CCE	19 39 59 99 119 139 <b>8883</b> 3)	40 60 80 100 120 140 4
1. AA. [ CI ]   Micro Vide Vide Vide Vide Vide Vide Vide Vide	ase s bscri 3 23 43 63 83 103 123 Code planra ocompo Gario Equi	end iptio 4 24 44 64 84 104 124 E CA	me (cn Pr 5 25 45 65 85 125 105 125 NA	B. E. H. E. H. E. E. P. M. E. H. E. E. H. E. E. H. E. E. H. E.	Soft Project P	of Control	n TV ipmen  9 29 49 69 89 109 129 insu insu insu insu insu insu gipmen	10 30 50 70 90 1100 1300 1300 1300 1300 1300 1300	8 & E  11	TECTY) ( in the Video Earth IT Test III	Cassis Satellinstrum  ronid  13 33 53 73 93 113 133  Void  Void  tronid	ette Rette R	15 35 55 75 95 115 135 135 135 135 135 135 135 135 13	2.97  16 36 56 76 96 116 136  2.00berr	17 37 57 77 97 117 137 2 2 1 P	18 38 58 78 98 118 138 138 CCE	19 39 59 79 9 119 139 <b>8833</b> 3)	40 60 80 100 120 140 4	



No postage necessary if mailed in the United States

#### BUSINESS REPLY CARD

FIRST CLASS

PERMIT #27346

PHILADELPHIA, PA.

POSTAGE WILL BE PAID BY

## **Computers&Electronics**

P.O. BOX 13877 PHILADELPHIA, PA. 19101



No postage necessary if mailed in the United States

#### BUSINESS REPLY CARD

FIRST CLASS

PERMIT #27346

PHILADELPHIA, PA.

POSTAGE WILL BE PAID BY

## **Computers&Electronics**

P.O. BOX 13877 PHILADELPHIA, PA. 19101



No postage necessary if mailed in the United States

#### BUSINESS REPLY CARD

FIRST CLASS

PERMIT #27346

PHILADELPHIA, PA.

POSTAGE WILL BE PAID BY

## **Computers&Electronics**

P.O. BOX 13877 PHILADELPHIA, PA. 19101

## Shelf Conscious?

Now you can organize your copies of

#### **Computers&Electronics**

Now your magazines can be a handsome addition to your decor, well organized, and easy to find, thanks to these durable library-quality cases or binders. They're made of luxury-look leatherette over high-quality binders board. And both styles are custom-designed for this or any magazine you save, with size, color, and imprint selected by the publisher. FREE transfer foil included for marking dates and volumes.



#### Magazine binders

hold your issues on individual snap in rods, combining them into one volume. \$7.95 each; 3 for \$22.50; 6 for \$42.95. Mixed titles OK for quantity prices.



#### Open-back cases

store your issues for individual reference. \$6.95 each; 3 for \$19.75; 6 for \$37.50. Mixed titles OK for quantity prices.

#### **HOW TO ORDER:**

Send check or money order, including \$1.00 per order for postage and handling (outside USA add \$2.50 per unit) to: Computers & Electronics, P.O. Box 5120, Philadelphia, PA 19141. Charge orders accepted (minimum \$10): include Visa, MC or AmEx card number, exp. date, name and address. PA residents add 6% sales tax.

## CREDIT CARD ORDERS CALL TOLL FREE 800-526-0790!

(In NJ only: 201-540-0445.)

Please specify cases or binders as well as quantities.

## When it comes to superior performance, we study our lines very carefully.

Superior printer performance is not a fluke. It evolves from analyzing printed line after printed line. Taking the time to test and retest. After 30 years of manufacturing precision parts, we know that there are no shortcuts.

And so we took the Gemini-10X and methodically put it through its 120 cps pace. We achieved a print head life of over 100 million characters with an extremely precise dot alignment creating each crisp character.

So far so good.

Next, sophisticated performance demanded versatility. A wide choice of character sets, a buffer expandable to 8K, and the ability to interface with all popular personal computers. We added macro

instruction, giving Gemini-10X the capability to perform up to 16 operations with one command. We included as standard a paper feed system that has a friction and fully adjustable tractor feed. Then we even built in the dexterity to print graphics and text on the same line.

Done.

And, of course, staying the best means constant reviewing and fine-tuning. Keeping the Gemini easy to find, easy to afford and so reliable it can be warranted for up to twice as long as its major competitors.

Only the most careful engineering has built the new hard-working Gemini-10X.
You'll applaud its performance.



THE POWER BEHIND THE PRINTED WORD.

Computer Peripherals Division
2803 N.W. 12th Street Dallas/Ft. Worth Airport TV 75361



